




Aluminum Line Splice

For use on:
**ACSR, ALL-Aluminum
 Aluminum Alloy**

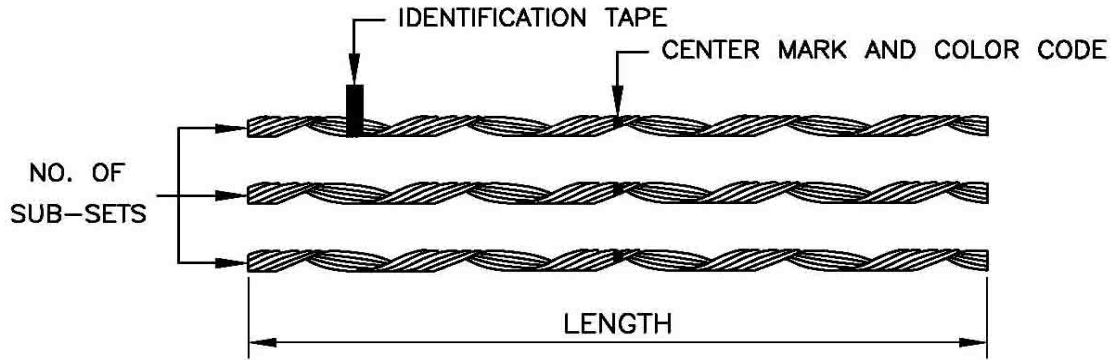

CATALOG NUMBER	Conductor Range		Nominal Conductor Size AWG or MCM	Units/ctn	Wt/carton (kg)	LENGTH (mm)	ROD DIAMETER (mm)	NO. OF SUBSETS	Color code
	(inches)	(mm)							
ALS0202	0.194 - 0.202	4.928 - 5.131	#6, 6/1 #6, 7W Alum. Alloy	50	2.72	559	2.18	2	BLUE
ALS0325	0.311 - 0.325	7.899 - 8.255	#2, 6/1 - 7/1 #2, 7W Alum. Alloy	50	7.26	787	2.59	3	RED
ALS0462	0.442 - 0.462	11.227 - 11.735	2/0, 6/1 2/0, 7W Alum. Alloy	50	16.79	1,067	3.45	3	BLUE
ALS0567	0.545 - 0.567	13.843 - 14.402	4/0, 7W Alum. Alloy 4/0, 6/1	25	72.73	1,321	4.24	3	RED
ALS0700	0.672 - 0.700	17.069 - 17.780	300, 26/7 - 30/7 336.4, 18/1 - 36/1 350, 19W-37W All-Alum.	25	30.85	1,778	5.18	3	BROWN
ALS1050	1.009 - 1.050	25.629 - 26.670	795, 36/1 795, 37W-61W All-Alum.	3	17.70	3,073	7.87	4	GREEN