


TYPE ADG

DISTRIBUTION GRIP DEAD END

For Use On: ACSR, All
Aluminum, Aluminum Alloy,
AWAC, Compacted ACSR

Right Hand Lay

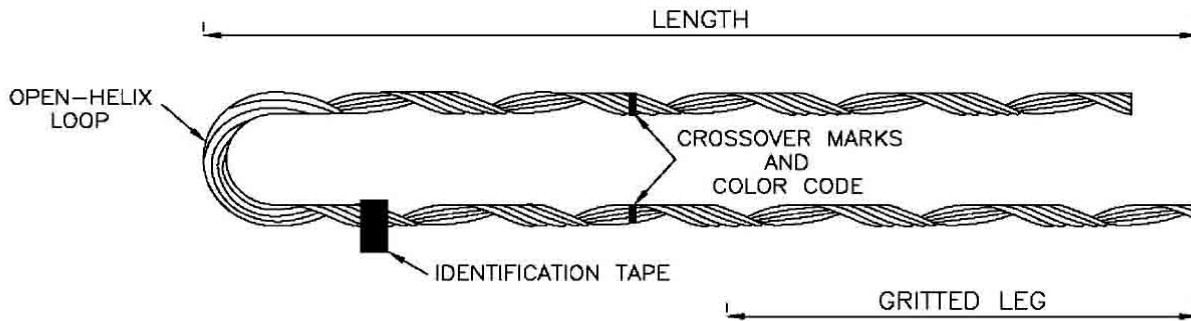

CATALOG NUMBER	Conductor Range		Nominal Conductor Size	Units/ctn	Length (mm)	Wt/carton (kg)	Color code
	(inches)	(mm)					
ADG0203	0.182 - 0.203	4.623 - 5.156	#6, 6/1 & comp., 7W All alum. & Alum. Alloy	100	406	30.86	Blue
ADG0257	0.229 - 0.257	5.817 - 6.528	#4, 6/1 & comp., 7/1, 7W All alum. & Alum. Alloy	100	432	44.08	Orange
ADG0325	0.290 - 0.325	7.366 - 8.255	#2, 6/1 & comp., 7/1, 7W All alum. & Alum. Alloy	100	610	72.73	Red
ADG0364	0.326 - 0.364	8.280 - 9.246	#1, 6/1 & comp., 7W All alum. & Alum. Alloy	100	660	96.98	Green
ADG0409	0.365 - 0.409	9.271 - 10.389	1/0, 6/1 & comp., 7W All alum. & Alum. Alloy	50	660	68.32	Yellow
ADG0460	0.410 - 0.460	10.414 - 11.684	2/0, 6/1 & comp., 7W All alum. & Alum. Alloy	50	787	61.71	Blue
ADG0516	0.461 - 0.516	11.709 - 13.106	3/0, 6/1 & comp., 7W All alum. & Alum. Alloy	25	813	48.49	Orange
ADG0577	0.517 - 0.577	13.132 - 14.656	4/0, 6/1 & comp., 7W All alum. & Alum. Alloy	25	864	132.24	Red
ADG0653	0.578 - 0.653	14.681 - 16.586	266.8, 18/1 & comp., 19W All alum & Alum Alloy 336.4, 18/1 comp.	25	889	85.96	Black
ADG0739	0.654 - 0.739	16.612 - 18.771	336.4, 18/1, 19W All alum & Alum Alloy 397.7, 18/1 comp.	25	991	116.81	Green
ADG0837	0.740 - 0.837	18.796 - 21.260	397.5, 18/1, 477 36/1, 477 18/1, 477 18/1 comp. 450 19W, 477 19W, 500 37W All alum. 397.5 19W Alum. Alloy	10	1,270	77.14	Orange
ADG0947	0.838 - 0.947	21.285 - 24.054	556.5 18/1, 605 18/1, 636 18/1 556.5 37W, 636 37W, 650 61W All Alum. 477 19W, 556.5 19W 636 18/1, 795 19W comp.	10	1,397	99.18	Blue
ADG1071	0.948 - 1.071	24.079 - 27.203	666.6 36/1, 715.5 36/1, 795 36/1 715.5 37W, 750 61W, 795 61W All Alum. 636 37W Alum. Alloy 874.5 37W, 954 37W comp.	10	1,575	141.05	Brown
ADG1212	1.072 - 1.212	27.229 - 30.785	874.5 18/1, 954 36/1, 1033.5 36/1 874.5 61W, 954 61W, 1033.5 61W All Alum. 795 37W Alum Alloy	5	1,778	101.38	Orange