


TYPE DBSTCF

DOUBLE SIDE TIE, C (2-1/4") & F (2-7/8") NECK

For Use On: ACAR, ACSR,
AWAC, All Aluminum,
Compacted ACSR, Aluminum
Alloy

Right Hand Lay

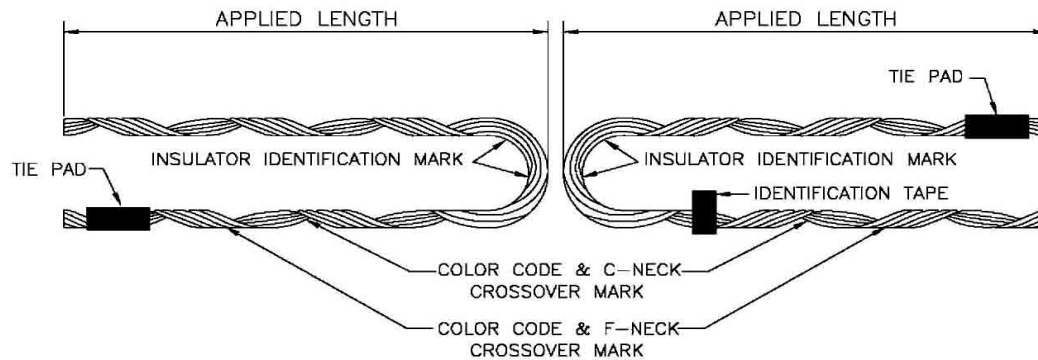

CATALOG NUMBER	Conductor Range		Nominal Conductor Size	Units/ctn	Length (mm)	Wt/carton (kg)	Color code
	(inches)	(mm)					
DBSTCF0277	0.245 - 0.277	6.223 - 7.036	#4, 6/1, 7/1 #4, 7W, Alum. Alloy	50	406	9.53	Orange
DBSTCF0315	0.278 - 0.315	7.061 - 8.001	#3, 7W, Alum. Alloy #2, 7W All Alum.	50	406	9.53	Purple
DBSTCF0357	0.316 - 0.357	8.026 - 9.068	#2, 6/1, 7/1 #2, 7W Alum. Alloy, #1, 6/1	50	432	9.53	Red
DBSTCF0405	0.358 - 0.405	9.093 - 10.287	1/0, 7W, All Alum. 1/0, 6/1, 7W Alum. Alloy	50	406	9.53	Yellow
DBSTCF0459	0.406 - 0.459	10.312 - 11.659	2/0, 7W All Alum. 2/0, 6/1, 7W Alum. Alloy	50	457	9.53	Blue
DBSTCF0520	0.460 - 0.520	11.684 - 13.208	3/0, 7W All Alum. 3/0, 6/1, 7W Alum. Alloy	50	483	16.33	Orange
DBSTCF0588	0.521 - 0.588	13.233 - 14.935	4/0, 7W All Alum. 4/0 6/1, 7W Alum. Alloy	50	483	16.33	Red
DBSTCF0665	0.589 - 0.665	14.961 - 16.891	266.8, 37W All Alum. 266.8, 18/1, 336.4 19W All Al.	50	508	17.24	Purple
DBSTCF0755	0.666 - 0.755	16.916 - 19.177	336.4, 18/1, 397.5 19W All Al. 400 MCM 19W, 37W All Alum.	50	508	17.70	Brown
DBSTCF0858	0.756 - 0.858	19.202 - 21.793	477, 19W, 37W All Alum. 477, 18/1, 24/7	50	508	17.70	Red
DBSTCF0968	0.859 - 0.968	21.819 - 24.587	556.5, 19W All Alum. 636, 18/1, 700 37W, 61W All al.	50	559	19.06	Blue
DBSTCF1096	0.969 - 1.096	24.613 - 27.838	795 37W, 61W All Alum. 715.5 24/7, 795 54/7	50	610	19.96	Green
DBSTCF1240	1.097 - 1.240	27.864 - 31.496	954 36/1, 54/7 1003.5 37W, 61W All Alum.	50	610	19.96	Yellow