




## TYPE DTF-P

### DISTRIBUTION TIE W/PAD, F NECK (2-7/8")

For Use On: ACAR, ACSR,  
AWAC, All Aluminum,  
Compacted ACSR, Aluminum  
Alloy

Right Hand Lay

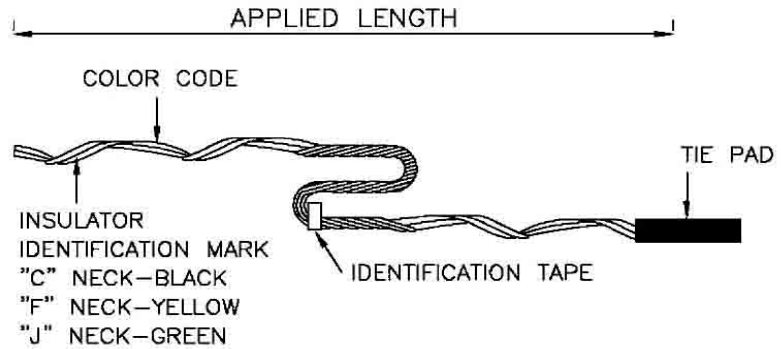

CATALOG NUMBER	Conductor Range		Nominal Conductor Size	Units/ctn	Length (mm)	Wt/carton (kg)	Color code
	(inches)	(mm)					
DTF0215P	0.190 - 0.215	4.826 - 5.461	#6, 6/1 #4, 7W Comp.	100	635	8.17	Blue
DTF0244P	0.216 - 0.244	5.486 - 6.198	#4, 7W All Alum. #4, 6/1, 7/1 Comp.	100	660	8.62	Brown
DTF0277P	0.245 - 0.277	6.223 - 7.036	#4, 6/1, 7/1 #4, 7W, Alum. Alloy	100	686	8.62	Orange
DTF0315P	0.278 - 0.315	7.061 - 8.001	#3, 7W, Alum. Alloy #2, 7W All Alum.	100	737	9.07	Purple
DTF0357P	0.316 - 0.357	8.026 - 9.068	#2, 6/1, 7/1 #2, 7W Alum. Alloy, #1, 6/1	100	787	9.07	Red
DTF0405P	0.358 - 0.405	9.093 - 10.287	1/0, 7W, All Alum. 1/0, 6/1, 7W Alum. Alloy	100	813	9.53	Yellow
DTF0459P	0.406 - 0.459	10.312 - 11.659	2/0, 7W All Alum. 2/0, 6/1, 7W Alum. Alloy	50	660	8.17	Blue
DTF0520P	0.460 - 0.520	11.684 - 13.208	3/0, 7W All Alum. 3/0, 6/1, 7W Alum. Alloy	50	686	8.17	Orange
DTF0588P	0.521 - 0.588	13.233 - 14.935	4/0, 7W All Alum. 4/0 6/1, 7W Alum. Alloy	50	737	8.62	Red
DTF0665P	0.589 - 0.665	14.961 - 16.891	266.8, 37W All Alum. 266.8, 18/1, 336.4 19W All Al.	50	813	8.62	Purple
DTF0755P	0.666 - 0.755	16.916 - 19.177	336.4, 18/1, 397.5 19W All Al. 400 MCM 19W, 37W All Alum.	50	813	9.07	Brown
DTF0858P	0.756 - 0.858	19.202 - 21.793	477, 19W, 37W All Alum. 477, 18/1, 24/7	50	838	9.07	Red
DTF0968P	0.859 - 0.968	21.819 - 24.587	556.5, 19W All Alum. 636, 18/1, 700 37W, 61W All al.	50	889	9.53	Blue
DTF1096P	0.969 - 1.096	24.613 - 27.838	795 37W, 61W All Alum. 715.5 24/7, 795 54/7	50	965	9.98	Green
DTF1240P	1.097 - 1.240	27.864 - 31.496	954 36/1, 54/7 1003.5 37W, 61W All Alum.	50	1,041	10.44	Yellow