


**TYPE NDE
COATED DEAD END
Conductor May be Right or Left Hand Lay**

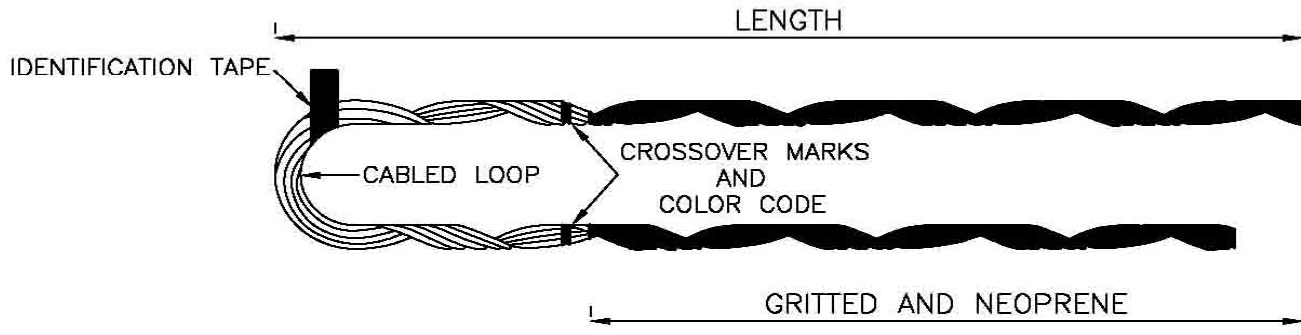

| CATALOG NUMBER | Conductor Range | | Jacketed Conductors, Polyethylene, Neoprene, Vinyl, Rubber Nominal Conductor Size | Units/ctn | Length (mm) | Wt/carton (kg) | Color code |
|----------------|-----------------|-----------------|--|-----------|-------------|----------------|------------|
| | (inches) | (mm) | | | | | |
| NDE0253 | 0.243 - 0.253 | 6.172 - 6.426 | #6 7W 2/64s | 100 | 432 | 5.90 | Green |
| NDE0264 | 0.254 - 0.264 | 6.452 - 6.706 | #6 Solid 3/64s, #6 6/1 2/64s | 100 | 432 | 6.35 | Red |
| NDE0272 | 0.265 - 0.272 | 6.731 - 6.909 | #4 Solid 2/64s | 100 | 457 | 6.35 | Blue |
| NDE0284 | 0.273 - 0.284 | 6.934 - 7.214 | #6 7W 3/64s | 100 | 457 | 6.35 | Orange |
| NDE0297 | 0.285 - 0.297 | 7.239 - 7.544 | #6 6/1 3/64s, #4 7W 2/64s | 100 | 483 | 6.81 | Black |
| NDE0310 | 0.298 - 0.310 | 7.569 - 7.874 | #4 Solid 3/64s, #6 7W 4/64s | 100 | 508 | 8.17 | Yellow |
| NDE0323 | 0.311 - 0.323 | 7.899 - 8.204 | #4 7W 2/64s Alum. Alloy, #4 6/1 2/64s | 100 | 508 | 8.17 | Orange |
| NDE0338 | 0.324 - 0.338 | 8.230 - 8.585 | #6 7W 4/64s Alum. Alloy, #4 7W 3/64s | 100 | 533 | 9.07 | Black |
| NDE0354 | 0.339 - 0.354 | 8.611 - 8.992 | #4 7W 3/64s Alum. Alloy, #4 6/1 3/64s | 100 | 559 | 9.07 | Yellow |
| NDE0374 | 0.355 - 0.374 | 9.017 - 9.500 | #4 7W 4/64s | 100 | 584 | 11.34 | Red |
| NDE0397 | 0.375 - 0.397 | 9.525 - 10.084 | #4 7W 4/64s, #4 7W 5/64s | 100 | 610 | 11.80 | Green |
| NDE0420 | 0.398 - 0.420 | 10.109 - 10.668 | #2 6/1 3/64s, #2 7/1 3/64s | 100 | 610 | 11.80 | Green |
| NDE0445 | 0.421 - 0.445 | 10.693 - 11.303 | #2 7W 4/64s Alum. Alloy, #1 7W 3/64s | 50 | 686 | 9.07 | Black |
| NDE0475 | 0.446 - 0.475 | 11.328 - 12.065 | #1 7W 4/64s, #4 7W 8/64s | 50 | 711 | 9.98 | Orange |
| NDE0507 | 0.476 - 0.507 | 12.090 - 12.878 | #1 19W 5/64s, 1/0 7W 4/64s | 50 | 762 | 13.61 | Blue |
| NDE0536 | 0.508 - 0.536 | 12.903 - 13.614 | 1/0 9W 6/64s | 50 | 762 | 13.16 | Red |
| NDE0571 | 0.537 - 0.571 | 13.640 - 14.503 | 2/0 7W 4/64s, 2/0 19W 6/64s comp. | 50 | 787 | 15.43 | Black |
| NDE0608 | 0.572 - 0.608 | 14.529 - 15.443 | 3/0 19W 4/64s, 2/0 19W 5/64s | 50 | 838 | 16.33 | Yellow |
| NDE0648 | 0.609 - 0.648 | 15.469 - 16.459 | 1/0 7W 8/64s, 4/0 7W 4/64s | 25 | 838 | 10.89 | Red |
| NDE0690 | 0.649 - 0.690 | 16.485 - 17.526 | 1/0 7W 10/64s, 4/0 19W 4/64s | 25 | 864 | 11.80 | Green |
| NDE0735 | 0.691 - 0.735 | 17.551 - 18.669 | 250 19w 4/64S, 266.8 18/1 4/64S | 25 | 889 | 13.61 | Black |
| NDE0783 | 0.736 - 0.783 | 18.694 - 19.888 | 3/0 7W 10/64s | 25 | 914 | 14.52 | Orange |
| NDE0834 | 0.784 - 0.834 | 19.914 - 21.184 | 300 19W 5/64s, 336 19W 5/64s | 25 | 965 | 15.43 | Blue |
| NDE0888 | 0.835 - 0.888 | 21.209 - 22.555 | 350 19W 5/64s, 300 19W 10/64s comp. | 25 | 1,016 | 18.15 | Black |
| NDE0945 | 0.889 - 0.945 | 22.581 - 24.003 | 250 19W 10/64s, 300 19W 10/64s | 25 | 1,067 | 19.96 | Yellow |
| NDE1005 | 0.946 - 1.005 | 24.028 - 25.527 | 450 37W 6/64s, 500 37W 6/64s | 25 | 1,118 | 23.59 | Green |
| NDE1070 | 1.006 - 1.070 | 25.552 - 27.178 | 450 37W 8/64s, 336.4 19W 12/64s | 10 | 1,143 | 10.89 | Red |
| NDE1138 | 1.071 - 1.138 | 27.203 - 28.905 | 350 19W 12/64s, 500 37W 10/64s | 10 | 1,194 | 10.89 | Blue |
| NDE1212 | 1.139 - 1.212 | 28.931 - 30.785 | 636 37W 10/64s comp. | 10 | 1,219 | 13.61 | Orange |
| NDE1288 | 1.213 - 1.288 | 30.810 - 32.715 | 795 61W 6/64s, 795 37W 10/64s comp. | 10 | 1,245 | 13.61 | Black |
| NDE1372 | 1.289 - 1.372 | 32.741 - 34.849 | 1033.5 61W 6/64s | 10 | 1,346 | 17.24 | Yellow |
| NDE1458 | 1.373 - 1.458 | 34.874 - 37.033 | 715 37W 14/64s | 10 | 1,346 | 17.24 | Green |
| NDE1550 | 1.459 - 1.550 | 37.059 - 39.370 | 795 37W 14/64s | 10 | 1,422 | 18.15 | Red |