




TYPE SPL

SPOOL TIE 1-3/4" NECK WITH PAD

Right Hand Lay

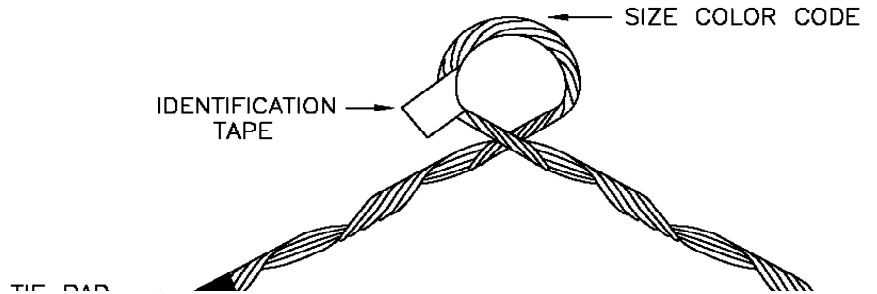

CATALOG NUMBER	Conductor Range		Nominal Conductor Size	Units/ctn	Length (mm)	Wt/carton (kg)	Color code
	(inches)	(mm)					
SPL0215	0.190 - 0.215	4.826 - 5.461	#6, 6/1 #4, 7W Comp.	100	406	5.44	Blue
SPL0244	0.216 - 0.244	5.486 - 6.198	#4, 7W All-Alum. #4, 6/1, 7/1 Comp.	100	432	5.90	Brown
SPL0277	0.245 - 0.277	6.223 - 7.036	#4, 6/1, 7/1 #4 7W Alum. Alloy	100	483	7.26	Orange
SPL0315	0.278 - 0.315	7.061 - 8.001	#3, 7W Alum. Alloy #2, 7W All Alum.	100	533	7.71	Purple
SPL0357	0.316 - 0.357	8.026 - 9.068	#2, 6/1, 7/1 #2 7W Alum. Alloy, #1, 6/1	100	610	10.44	Red
SPL0405	0.358 - 0.405	9.093 - 10.287	1/0, 7W All Alum. 1/0, 6/1, 1/0 7W Alum. Alloy	100	660	10.89	Yellow
SPL0459	0.406 - 0.459	10.312 - 11.659	2/0, 7W All Alum. 2/0, 6/1, 2/0, 7W Alum. Alloy	100	711	12.70	Blue
SPL0520	0.460 - 0.520	11.684 - 13.208	3/0, 7W All Alum. 3/0, 6/1, 3/0 7W Alum. Alloy	100	787	14.52	Orange
SPL0588	0.521 - 0.588	13.233 - 14.935	4/0, 7W All Alum. 4/0, 6/1, 4/0 7W Alum. Alloy	50	813	8.17	Red
SPL0665	0.589 - 0.665	14.961 - 16.891	266.8 MCM, 37W All Alum. 266.8 MCM, 18/1	50	584	8.62	Purple
SPL0755	0.666 - 0.755	16.916 - 19.177	336.4 MCM, 18/1, 19W All Al. 397.5 MCM, 19W All Alum. 400 MCM, 19W	50	635	10.89	Brown
SPL0858	0.756 - 0.858	19.202 - 21.793	477, 19W, 37W All Alum. 477 MCM, 18/1, 24/7 556.5 19W All Alum.	50	660	11.34	Red
SPL0968	0.859 - 0.968	21.819 - 24.587	636 MCM, 18/1 700, 37W, 61W, All Alum.	50	711	11.80	Blue