




## TYPE STC-T

### SIDE TIE W/O PAD, C NECK (2-1/4")

For Use On: ACAR, ACSR,  
AWAC, All Aluminum,  
Compacted ACSR, Aluminum  
Alloy

Right Hand Lay

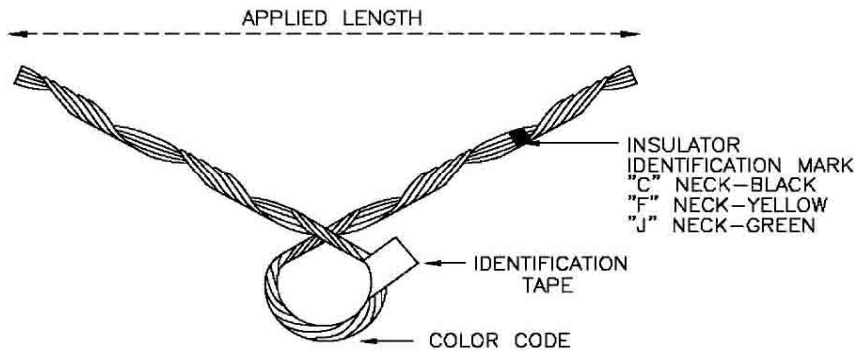

CATALOG NUMBER	Conductor Range		Nominal Conductor Size	Units/ctn	Length (mm)	Wt/carton (kg)	Color code
	(inches)	(mm)					
STC0215T	0.190 - 0.215	4.826 - 5.461	#6, 6/1 #4, 7W Comp.	75	406	4.08	Blue
STC0244T	0.216 - 0.244	5.486 - 6.198	#4, 7W All Alum. #4, 6/1, 7/1 Comp.	75	432	4.54	Brown
STC0277T	0.245 - 0.277	6.223 - 7.036	#4, 6/1, 7/1 #4, 7W, Alum. Alloy	75	483	5.44	Orange
STC0315T	0.278 - 0.315	7.061 - 8.001	#3, 7W, Alum. Alloy #2, 7W All Alum.	75	533	5.44	Purple
STC0357T	0.316 - 0.357	8.026 - 9.068	#2, 6/1, 7/1 #2, 7W Alum. Alloy, #1, 6/1	75	610	7.71	Red
STC0405T	0.358 - 0.405	9.093 - 10.287	1/0, 7W, All Alum. 1/0, 6/1, 7W Alum. Alloy	75	660	7.71	Yellow
STC0459T	0.406 - 0.459	10.312 - 11.659	2/0, 7W All Alum. 2/0, 6/1, 7W Alum. Alloy	75	711	10.44	Blue
STC0520T	0.460 - 0.520	11.684 - 13.208	3/0, 7W All Alum. 3/0, 6/1, 7W Alum. Alloy	75	762	9.98	Orange
STC0588T	0.521 - 0.588	13.233 - 14.935	4/0, 7W All Alum. 4/0 6/1, 7W Alum. Alloy	35	813	5.44	Red
STC0665T	0.589 - 0.665	14.961 - 16.891	266.8, 37W All Alum. 266.8, 18/1, 336.4 19W All Al.	35	584	5.44	Purple
STC0755T	0.666 - 0.755	16.916 - 19.177	336.4, 18/1, 397.5 19W All Al. 400 MCM 19W, 37W All Alum.	35	635	5.90	Brown
STC0858T	0.756 - 0.858	19.202 - 21.793	477, 19W, 37W All Alum. 477, 18/1, 24/7	35	660	6.81	Red
STC0968T	0.859 - 0.968	21.819 - 24.587	556.5, 19W All Alum. 636, 18/1, 700 37W, 61W All al.	35	711	7.26	Blue
STC1096T	0.969 - 1.096	24.613 - 27.838	795 37W, 61W All Alum. 715.5 24/7, 795 54/7	no. std.	737	no. std.	Green
STC1240T	1.097 - 1.240	27.864 - 31.496	954 36/1, 54/7 1003.5 37W, 61W All Alum.	no. std.	838	no. std.	Yellow