

TABLE OF CONTENTS

Introduction

Basic Connection Principles **O-2**

Hardware Data

DURIUM™ Steel/Aluminum
Tightening Torques **O-6**

DURIUM™ Hex Bolts Data **O-6**

UL Tightening Torque UL486 **O-7**

Cable Data (Tables)

Copper Cable

Copper Tube **O-8**

Solid Copper Wire **O-8**

Stranded Copper Cable **O-8**

Compact Stranded Copper Cable **O-9**

Flexible Copper Stranded Cable **O-10**

Aluminum and ACSR Cable

Aluminum Tube **O-11**

Aluminum 1350 Cable
Bare-Classes AA and A **O-11**

Aluminum 1350 Cable
Bare-Class B **O-11**

ACSR Cable **O-12**

High Strength ACSR Cable **O-12**

Compact Aluminum 1350 Cable **O-13**

Aluminum Alloy 5005 Cable **O-13**

Aluminum 6201 Cable **O-13**

Aluminum Alloy 8000 Series "O"
Temper Cable **O-14 - O-15**

Compact ACSR Cable **O-15**

ACSR/TW Cable (Trap Wire) **O-15 - O-16**

AAC/TW Cable
(All Aluminum Trap Wire) **O-16**

ACAR Cable **O-16**

SSAC Cable **O-17**

Steel Conductors

Copperweld Cable **O-18**

Copperweld - Copper Cable **O-18**

Galvanized Steel Cable **O-18**

Alumoweld Cable **O-19**

AWG vs Metric Wire Sizes O-19

Inches - Millimeters

Conversion Chart O-20

Terminal Stud Size Chart O-21

Die Set Conversion Chart

(Obsolete Dies) **O-22 - O-28**

12-Ton U Dies O-29

W Dies O-29

Installation Tool Index O-30 - O-40

Catalog Numbers

Requiring MSDS O-41

Color Coding for Overhead

Connectors O-41

Color Coding for

AL/CU Connectors O-42

Color Coding for Copper

Lugs and Splices O-42

Alpha-Numeric Index O-43 - O-

Product/Trade Name Index O-

INTRODUCTION

BASIC ELECTRICAL CONNECTION PRINCIPLES

Basic Factors:

The basic factors which influence the design and performance of pressure wire connections are as follows:

1. Creep
2. Surface Oxide
3. Corrosion

A fourth factor, known as thermal effects, is also a consideration, but due to the technical nature and length of the topic, it will not be discussed in this publication.

At the outset it should be pointed out that these factors give rise to much more difficult problems in connections involving aluminum conductors than those encountered in copper to copper connections.

CREEP (COLD FLOW)

Creep is the cold flow of the metal under pressure, and it continues until the pressure reduces to a value at which any further creep is negligible. Creep properties depend on the particular metal or alloy and on its hardness; alloys having less creep than pure metals, and harder metals have less creep than soft metals. In a typical connection, the conductors are generally of pure metal and often of soft temper and therefore, subject to considerable creep. In addition, the condition is further exaggerated when aluminum is the conductor as compared to copper, since its creep rate is many times that of copper.

Effect of Creep: Figure 2 shows typical curves of total contact resistance plotted against total contact force. Curve A shows how the contact resistance continually decreases with increasing contact force. When the full contact force F_1 is reached, the contact resistance reaches the low value of R_1 . In general, the full tightening force on a connector greatly exceeds the maximum force for which there is no appreciable creep. Therefore, the force will gradually settle down to a value after which there will be no further significant creep. Fortunately, however, the

resistance does not climb back up along curve A, the tightening curve, but instead it follows a new curve B, the relaxing curve, along which the resistance changes very little, until the force relaxes to a value such as F_2 .

Admittedly, the point of "no appreciable creep" is difficult to define. For pure metals, especially in the soft state, there is always some creep, even at very low pressures at room temperature. However, we do know that the pressure required to produce the same creep rate is several times greater for copper than for aluminum. Thus, to permit the same contact force F_2 for aluminum and copper, the contact area A required for aluminum can be expected to be considerably greater than that required for copper. This explains why the contact areas for connectors for aluminum must be considerably greater than for copper, and why many light duty connectors for copper are entirely inadequate for aluminum, even when specially plated and when recommended compounds are used on the contact surfaces.

Relaxation: Relaxation of pressure due to creep, or for any other reason, would be a much more difficult factor in a pressure connection were it not for the relationship of contact pressure to contact resistance on the relaxation curve as shown in Figure 2. It is frequently observed that some time after the bolts of a clamp type connector are tightened, the bolt tensions are relaxed appreciably. The question arises as to whether it is necessary to retighten the bolts to the original torque value. In a properly designed connector, retightening is unnecessary since the contact resistance should increase very little due to the relaxation of pressure, as shown by the relaxation curve of Figure 2.

This fact is largely responsible for the successful operation of a compression connector. The application of the compression tool applies very high pressure, establishing very low contact resistance. The removal of the compression tool releases a very large proportion of this pressure, and creep further relaxes this pressure. Fortunately, the contact resistance increases very little due to this pressure relaxation.

Contact Force: The previous analysis shows that the total contact force largely determines the contact resistance. Thus, to achieve the desired low value of contact resistance, the proper size and number of bolts in a clamp type connector must be supplied, and the compression tool must apply the proper force to a compression connector. In addition, the connector must be

designed with sufficient structural strength, contact area, and resilience, to assure that the contact force cannot relax beyond the point where contact resistance begins to rise appreciably, as shown in Figure 2.

SURFACE OXIDE


The contact of pure metallic surfaces cannot be assured in practical connections. Surface contamination must be expected, especially surface oxidation. These surface films are insulators as far as contact resistance is concerned, and they must be broken to achieve metal to metal contact to make an adequate electrical connection. The difficulty of breaking the film depends on the nature of the film, its thickness, and the metal on which it is formed.

Copper oxide is generally broken down by reasonably low values of contact pressure. Unless the copper is badly oxidized, good contact can be obtained with very little or no cleaning.

Silver oxide is even more easily broken down by the contact pressure; and since silver oxide forms less readily at elevated temperatures, silver contact surfaces are preferred over copper when used for higher temperatures. For this reason, it is considered good practice to silver plate copper contact surfaces that must operate at temperatures over 200° C.

On the other hand, aluminum oxide is a hard, tenacious, high resistance film that forms very rapidly on the surface of aluminum exposed to air. In fact, it is the toughness of this film that gives aluminum its good corrosion resistance. The oxide film that forms after more than a few hours is too thick and tough to permit a low resistance contact without cleaning. The aluminum oxide film is transparent so that even the bright and clean appearance of an aluminum connector is no assurance that the low contact resistance can be attained without cleaning.

In addition to the necessity for cleaning the oxide from aluminum, the surface should be covered with a good connector compound to prevent the oxide from reforming. Common practice is to clean the surface with a wire brush or emery cloth. The compound should be applied immediately after cleaning, or the compound should be put on first and the surface scraped through the compound. Present practice is to scratch brush dry and to apply the compound immediately thereafter. This allows a more thorough job of cleaning the conductor.

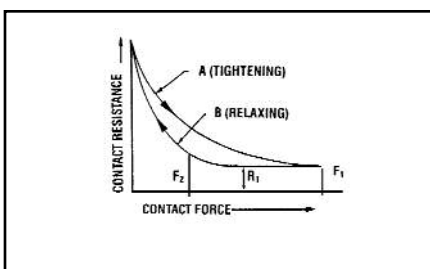

INTRODUCTION (Continued)

Contact Compounds: Petrolatum or No-Oxid are good contact surface compounds for aluminum, but BURNDY® PENETROX A, a petroleum type compound containing zinc dust, has the additional advantage of assisting in the breaking down of the contact resistance. How this is accomplished is not certain, but it appears that the zinc particles of PENETROX A probably act as current bridges in the breaks in the oxide film. For more complete information about the PENETROX™ line of compounds, refer to the Accessories Section of this catalog.

Interstrand Resistance: The high contact resistance due to the oxide on the strands of an aluminum cable may be responsible for a poor distribution of current among the strands on the cable. Thus, the outer strands may carry much more than their share of the current and overheating of the cable may result. Tests have shown that even on new cable this effect of interstrand resistance can be considerable unless a good contact compound is used. The clamping action tends to break down the oxide and force the compound between the strands. This is particularly true of compression connectors due to the very high unit pressures developed.

The most effective way to break down interstrand resistance of aluminum cable is to use compression connectors filled with a compound having zinc particles. Then, when the end of the cable is inserted in the connector, the compound is forced between the strands where it very effectively breaks down the interstrand resistance upon application of the compressive force.

Plating Aluminum: Plating the contact surfaces of aluminum connectors will prevent the formation of aluminum oxide. Electro-tin, cadmium and zinc platings have been used for this purpose. However, the use of a plated aluminum conductor, does not make it less necessary to scratch brush the aluminum conductor, nor does it reduce the need for a good contact compound. Additional problems are introduced due to the plating on aluminum which render it of very doubtful value over the proper use of bare aluminum. This will be more fully discussed later.

CORROSION

The electrical conductivity and mechanical strength of an electrical connection must remain stable under the deteriorating influences of the environment. This deterioration is corrosion. It is the electrolytic action of moisture and other elements of the atmos-

phere in conjunction with the metals of the connection. If the conductors and connectors are of copper or a corrosion resistant copper alloy, corrosion is usually a minor factor. However, it is a very vital factor if aluminum is involved.

If moisture can be kept away from the connection, corrosion will not be a factor. The electrical connection of a high voltage splice on insulated cable is generally free from corrosion since the taping must be moisture-proof. Similarly, taping may be used to avoid corrosion on bare cable, provided it excludes moisture. It is difficult to get a good tape seal to the conductor itself, especially on stranded cable. If moisture does penetrate the taping, it will not dry out as readily as if the joint were untaped. Various plastic materials are available today for covering low voltage connections or for bare conductor connections on high voltage. Unless such coverings are completely moisture-proof, it is better to rely on installation with a good contact compound, using a connector designed to resist corrosion.

Galvanic Action: Whenever dissimilar metals are in the presence of an electrolyte, a difference in electric potential is developed. One metal becomes the cathode and receives a positive charge. The other becomes the anode and receives a negative charge. When these metals are in contact, an electrical current will flow, as in the case of any short-circuited electric cell. This electrolytic action causes an attack of the anodic metal, leaving the cathodic metal unharmed. The extent of the attack is proportional to the strength of the electrolytic current, which in turn is proportional to the electric potential difference developed.

The magnitude of the potential difference generated between two dissimilar metals can be seen by the position of these metals in the electrolytic series. Figure 3 is such a series. When two metals are in contact in an electrolyte, the one higher up in this series is the anode, the corroded metal, while the one lower is the cathode, the protected metal. The further apart the metals are in this series, the greater the electrolytic potential difference, and the greater the attack to the anodic metal.

Note that copper and aluminum are quite far apart in the series, copper being cathodic and aluminum anodic. Hence, when aluminum and copper are in contact in an electrolyte, the aluminum can be expected to be severely attacked.

Crevice Corrosion: Electrolytic attack can also occur between like metals due to a phenomenon known as oxygen concentration cell or crevice corrosion. Since oxygen is necessary for corrosive action, a variation in the concentration of oxygen where a metal is exposed to an electrolyte will generate a difference of potential, and cause a corrosive attack in the oxygen starved area. Thus, since an electrolyte in a deep crevice is freely exposed to the air at the outside, the concentration of oxygen will be greatest at the mouth of the crevice. Then corrosion can be expected to occur in the crevice remote from the surface. Crevice corrosion can be prevented if the crevice is filled with a compound to exclude moisture. Thus, within the contact groove of an aluminum connector containing an aluminum conductor, there will be numerous crevices in which corrosion will take place unless a good connector compound is applied during installation. Copper, being a more noble metal, appears to be much less subject to crevice corrosion.

Corrosion Testing: The effectiveness of an electrical connection to resist corrosion can be tested in the laboratory under conditions designed to greatly accelerate the natural corrosive conditions of actual service. The most widely accepted means is the standard salt spray chamber. In this chamber the specimens are placed in a salt fog made by atomizing a 20% salt solution at 100 deg. F.

BURNDY® Electrical as well as other manufacturers and utility companies, have done a great deal of testing and a considerable area of agreement has been reached. There are, however, minor differences in recommended practices. The problem is concerned with aluminum and aluminum to copper connections since the effect of corrosion on copper to copper connections is far less serious. Let us study the recommended practices.

Aluminum to Aluminum Connections: For joining aluminum to aluminum conductors, there is little disagreement that an aluminum bodied connector is the proper choice, since this obviously eliminates the galvanic corrosion of dissimilar metals. However, even in this case, care must be taken to prevent crevice corrosion and to select an alloy of aluminum for the connector body that is free from cracking due to stress corrosion.

Aluminum to Copper Connections: Similarly, for joining aluminum to copper conductors, an aluminum bodied connector is the best choice since it prevents galvanic corrosion of the aluminum conductor, the

INTRODUCTION (Continued)


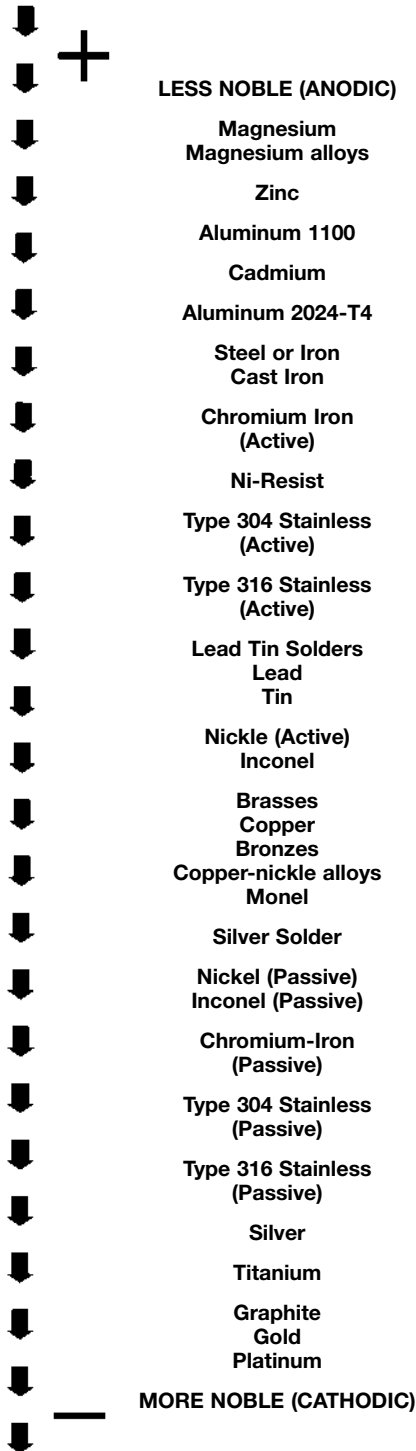


Fig. 3

most vulnerable element to attack in the connection. Realizing this, BURNDY® initiated a research program aimed at finding the best way to make an aluminum connector suitable for joining aluminum to copper conductors.

This led to the evolution of the “Massive Anode Principal” of connector design for joining conductors of dissimilar metal. On the basis of this principal, properly designed, all-aluminum connectors became available for universal use in joining aluminum to aluminum or aluminum to copper conductors.

Massive Anode Principle: By making the aluminum connector massive in comparison to the copper conductor, when the copper conductor emerges from the connector, the electrolytic current density over the exposed face of the aluminum connector is greatly reduced. This is schematically represented in Figure 4. Since the rate of corrosion is directly related to the current density on the surface of the anodic material, the relatively large face of the aluminum connector will suffer only minor attack.

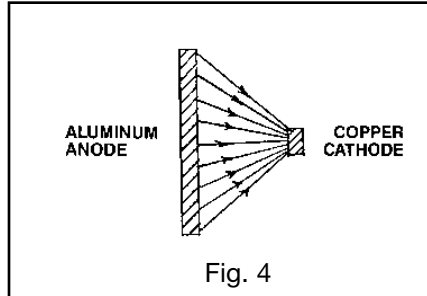

In addition, because the aluminum connector body is massive in the region where the corrosion occurs, the small loss of metal caused by corrosion is insignificant, even after long periods of service. Furthermore, the connector design should be such that clamping bolts, and areas of high stress which provide structural strength, are not in the regions subject to galvanic attack.

The effectiveness of this theory has been amply demonstrated in salt spray corrosion tests in which the connectors were subject to 1,000 hours in the salt spray fog with only minor corrosive pitting adjacent to the copper conductor, as seen in Figure 5. In addition, the aluminum conductor was completely protected, and the joint resistance remained virtually unchanged. The test involved a wide variety of sizes and types of connectors showing the effectiveness for small service connectors as well as large power connectors. Figure 6 shows a large all aluminum

clamp type T connector installed on 3/2” diameter copper run and 750 kcmil aluminum tap. The figure shows this connector opened up after the 1,400 hours of the salt spray test. Note that the contact surfaces are bright and clean and the only evidence is minor pitting along the faces adjacent to the copper.

*It should be emphasized that a good compound should be used on the contact surfaces whether aluminum or copper is used in an aluminum connector.

Position of Conductor: A properly designed aluminum connector for joining aluminum to copper must provide adequate separation between the conductors to prevent electrolytic attack on the aluminum conductor. Even then, it is good practice to install the aluminum conductor above the copper conductor if possible. This will prevent pitting of the aluminum conductor due to copper salts being washed over the aluminum.

Plated Aluminum Connectors: Plating has been used as a means to make an aluminum connector suitable for copper conductor. Such platings as copper, zinc, tin and cadmium have been used. The plating of aluminum is much more critical than plating a more noble metal such as copper. In addition, a preplate, usually of copper or brass, must be applied, thus introducing numerous metals and further possibilities for galvanic corrosion.

To be effective in reducing galvanic corrosion between the copper conductor and the aluminum connector, the plated metal must be closer in the Electrolytic Series to copper than is aluminum. It must therefore, be cathodic to aluminum. Since porosity and minor scratches are always present, galvanic action can be expected in the presence of moisture, resulting in attack of the aluminum under the plating. Corrosion tests reveal attack in the form of a mottled appearance and flaking of the plating.

In addition, the presence of plated metal can cause galvanic attack of the aluminum conductor, thus reducing the protection offered to this conductor in an aluminum connector.

Cleaning and the Use of Compound: It should be emphasized that when aluminum connectors or conductors are involved, proper cleaning of the aluminum and the use of a good connector compound, such as BURNDY® PENETROX A, are essential for trouble-free service. BURNDY®, as well as other manufacturers, provide the contact grooves with a coating to make it unnecessary to clean the connectors, but in all cases,

INTRODUCTION (Continued)

the aluminum conductor should be cleaned by means such as scratch brushing, and immediately coated with the connector compound.

To simplify the application of the compound, and to assure its use, almost all BURNDY® aluminum connectors, except the large clamp type substation connectors, are supplied factory filled with PENETROX compound. For the tubular compression connectors, the tubular barrels are sufficiently filled with PENETROX and capped. For other types, the contact grooves are filled with PENETROX and enclosed in plastic packaging in a process called "Stripsealing".

Clamp vs. Compression: In general, a compression connection can be expected to be more corrosion resistant than a clamp connection. The high pressures applied in a compression connector more effectively seal the contact against the penetration of moisture. The tubular sleeve of a compression connector has no side openings such as exist in clamp connectors between the clamping members. On the other hand, the clamp connector can be made more corrosion resistant if the conductor grooves conform more closely with the conductor contour. Thus a clamp connector made to accommodate a wide range of conductor sizes cannot be expected to be as corrosion resistant as one designed for one specific conductor size. Nevertheless, the differences in effectiveness of various designs can be minimized if a good contact compound is used.

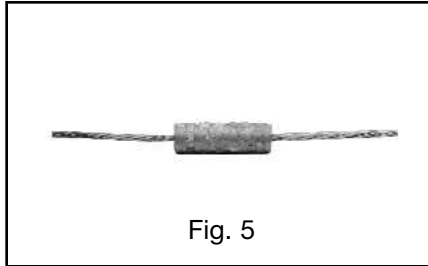


Fig. 5
Negligible Corrosion of Severe Salt Spray on Compression Connector Joining Aluminum to Copper.

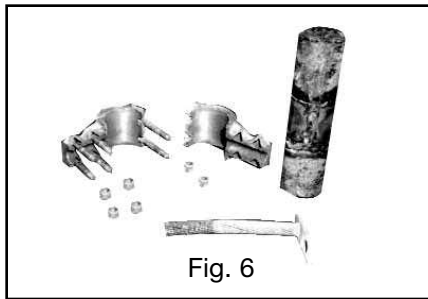


Fig. 6
Large Aluminum Bolted Connector Joining Copper Run to Aluminum Tap After Severe Salt Spray Test.

HARDWARE DATA

RECOMMENDED TIGHTENING TORQUE

The hardware used in connectors must be compatible with the connector material, have high mechanical strength and be corrosion resistant.

Copper alloy connectors have hardware made of DURIUM™, which is BURNDY's trade name for silicon bronze alloy ASTMB99. This material was first introduced by BURNDY® in 1927 for use in outdoor construction, and today, is the standard throughout the industry.

Aluminum connectors generally have aluminum alloy hardware. The bolts are 2024T4 and anodized to resist corrosion. The nuts are 6061T6, which is resistant to corrosion


Steel Hardware		Aluminum Hardware	
Bolt Size	Recommended Torque (Inch Pounds)	Bolt Size	Recommended Torque (Inch Pounds)
1/4 - 20	80	1/2 - 13	300
5/16 - 18	180	5/8 - 11	480
3/8 - 16	240	3/4 - 10	650
1/2 - 13	480		
5/8 - 11	660		
3/4 - 10	1050		

and does not require anodizing. Bolts are lubricated to eliminate galling and to provide consistent clamping forces.

The size material for clamping hardware are selected to provide the required force when tightened to the recommended torque. To reduce or greatly exceed the recommended torque can adversely affect the performance of the connector.

DURIUM™ (SILICON BRONZE)


HEXAGONAL BOLT DATA

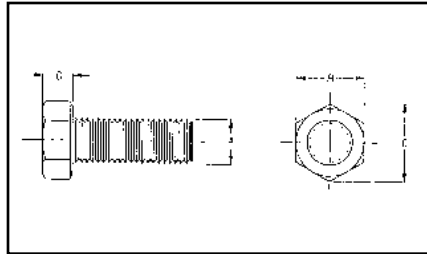

② CATALOG NO. SERIES	"A" (BOLT SIZE)	"B"	"C"	"D"	③ RECOMMENDED TORQUE (in-lb)	MIN. BREAKING FORCE (lb)	MIN. SHEARING FORCE (lb)
25X__HEB	1/4 - 20 UNC	7/16	.50	.16	80	1,780	990
31X__HEB	5/16 - 18 UNC	1/2	.56	.21	180	2,930	1,640
38X__HEB	3/8 - 16 UNC	9/16	.65	.24	240	4,350	2,430
50X__HEB	1/2 - 13 UNC	3/4	.87	.32	480	7,950	4,460
62X__HEB	5/8 - 11 UNC	15/16	1.08	.40	660	12,700	7,100
75X__HEB	3/4 - 10 UNC	1-1/8	1.30	.48	1050	17,510	10,540

1. Material: DURIUM™ (Silicon Bronze)
- ② "___" is substituted for bolt length. Consult sales representative for available lengths.
- ③ These torque values develop maximum bolt preload.
4. This drawing is based on BURNDY® engineering spec.

RECOMMENDED TERMINATION HARDWARE

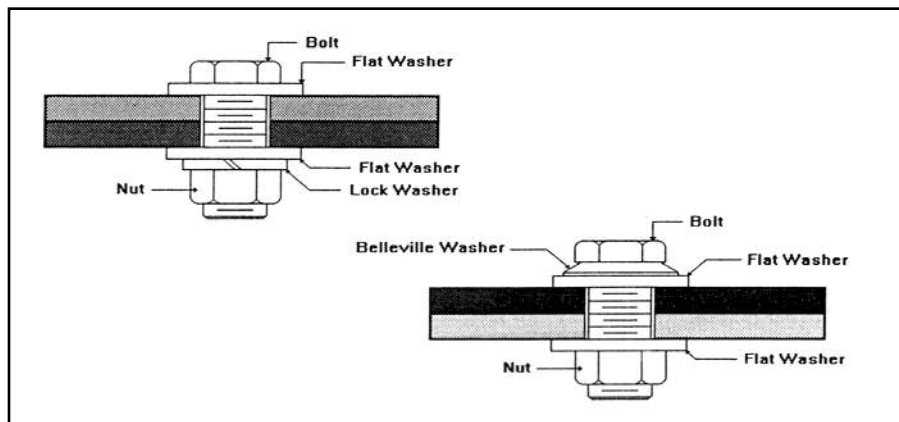

RECOMMENDED TIGHTENING TORQUE

PER UL486A AND UL486B

Table 21 – Tightening torque for screws

Test Conductor Size Installed in Connector		Tightening Torque, N•m (lbf-in)							
		Slotted Head No. 10 and Larger ^a				Hexagonal Head — External Drive Socket Wrench			
		Slot Width — 1.2 mm (0.047 in.) or Less and Slot Length — 6.4 mm (1/4 in.) or less		Slot Width — Over 1.2 mm (0.047 in.) or Slot Length — Over 6.4 mm (1/4 in.)					
				Split-Bolt Connectors		Other Connectors			
AWG or kcmil	(mm ²)	A	B	A	B	A	B	A	B
30 - 10	(0.05 - 5.3)	1.7 (15)	2.3 (20)	2.8 (25)	4.0 (35)	7.3 (65)	9.0 (80)	6.8 (60)	8.5 (75)
8	(8.4)	2.3 (20)	2.8 (25)	3.4 (30)	4.5 (40)	7.3 (65)	9.0 (80)	6.8 (60)	8.5 (75)
6 - 4	(13.2 - 21.2)	2.8 (25)	4.0 (35)	4.0 (35)	5.1 (45)	15.3 (135)	18.6 (165)	10.2 (90)	12.4 (110)
3	(26.7)	2.8 (25)	4.0 (35)	4.5 (40)	5.6 (50)	25.4 (225)	31.1 (275)	14.1 (125)	16.9 (150)
2	(33.6)	3.4 (30)	4.5 (40)	4.5 (40)	5.6 (50)	25.4 (225)	31.1 (275)	14.1 (125)	16.9 (150)
1	(42.4)	—	—	4.5 (40)	5.6 (50)	25.4 (225)	31.1 (275)	14.1 (125)	16.9 (150)
1/0 - 2/0	(53.5 - 67.4)	—	—	4.5 (40)	5.6 (50)	35.6 (315)	43.5 (385)	16.9 (150)	20.3 (180)
3/0 - 4/0	(85.0 - 107.2)	—	—	4.5 (40)	5.6 (50)	45.2 (400)	56.5 (500)	22.6 (200)	28.2 (250)
250 - 350	(127 - 177)	—	—	4.5 (40)	5.6 (50)	62.1 (550)	73.4 (650)	28.2 (250)	36.7 (325)
400	(203)	—	—	4.5 (40)	5.6 (50)	76.3 (675)	93.2 (825)	28.2 (250)	36.7 (325)
500	(253)	—	—	4.5 (40)	5.6 (50)	76.3 (675)	93.2 (825)	33.9 (300)	42.4 (375)
600 - 750	(304 - 380)	—	—	4.5 (40)	5.6 (50)	90.4 (800)	113.0 (1000)	33.9 (300)	42.4 (375)
800 - 1000	(406 - 508)	—	—	4.5 (40)	5.6 (50)	111.7 (900)	124.3 (1100)	45.2 (400)	56.5 (500)
1250 - 2000	(635 - 1000)	—	—	—	—	111.7 (900)	124.3 (1100)	56.5 (500)	67.8 (600)

^a For values of slot width or length not corresponding to those specified, select the largest torque value associated with the conductor size. Slot width is the nominal design value. Slot length shall be measured at the bottom of the slot.

Table 22 – Tightening torque for slotted head screws smaller than No. 10 intended for use with 8 AWG (8.4 mm²) or smaller conductors

Slot Length of Screw ^a		Tightening Torque, N•m (lbf-in)			
		Slot Width of Screw Smaller than 1.2 mm (0.047 in.) ^b		Slot Width of Screw 1.2 mm (0.047 in.) and larger ^b	
		A	B	A	B
mm	(in.)				
Less than 4	(Less than 5/32)	0.68 (6)	0.79 (7)	0.79 (7)	1.0 (9)
4	(5/32)	0.68 (6)	0.79 (7)	1.1 (10)	1.4 (12)
4.8	(3/16)	0.68 (6)	0.79 (7)	1.1 (10)	1.4 (12)
5.6	(7/32)	0.68 (6)	0.79 (7)	1.1 (10)	1.4 (12)
6.4	(1/4)	0.79 (7)	1.0 (9)	1.1 (10)	1.4 (12)
7.1	(9/32)	—	—	1.4 (12)	1.7 (15)
Above 7.1	(Above 9/32)	—	—	1.8 (16)	2.3 (20)

^a For slot lengths of intermediate values, select torques pertaining to next shorter slot length. Also, see Table 21 for screws with multiple tightening means. Slot length shall be measured at the bottom of the slot.

^b Slot width is the nominal design value.

Table 23 – Tightening torque for screws with recessed allen or square drives

Socket Width Across Flats ^a		Tightening Torque, N•m (lbf-in)	
		A	B
mm	(in.)		
3.2	(1/8)	4.0 (35)	5.1 (45)
4.0	(5/32)	9.0 (80)	11.3 (100)
4.8	(3/16)	11.3 (100)	136.6 (120)
5.6	(7/32)	13.6 (120)	16.9 (150)
6.4	(1/4)	16.9 (150)	22.6 (200)
7.9	(5/16)	25.4 (225)	31.1 (275)
9.5	(3/8)	33.9 (300)	42.4 (375)
12.7	(1/2)	45.2 (400)	56.5 (500)
14.3	(9/16)	56.5 (500)	67.8 (600)

^a See Table 21 for screws with multiple tightening means.

CABLE DATA

COPPER TUBE (BUS)

SIZE OF TUBE IPS	DIAMETER OF TUBE (Inches)		WALL THICKNESS (Inches)
	OUTSIDE	INSIDE	
STANDARD PIPE SIZES			
1/4"	0.540	0.375	0.082 5
3/8"	0.675	0.494	0.090 5
1/2"	0.840	0.625	0.107 5
3/4"	1.050	0.822	0.114 0
1"	1.315	1.062	0.126 5
1-1/4"	1.660	1.368	0.146 0
1-1/2"	1.900	1.600	0.150 0
2"	2.375	2.062	0.156 5
2-1/2"	2.875	2.500	0.187 5
3"	3.500	3.062	0.219 0
3-1/2"	4.000	3.500	0.250 0
4"	4.500	4.000	0.250 0
4-1/2"	5.000	4.500	0.250 0
5"	5.563	5.063	0.250 0
6"	6.625	6.125	0.250 0
EXTRA HEAVY PIPE SIZES			
1/4"	0.540	0.294	0.123
3/8"	0.675	0.421	0.127
1/2"	0.840	0.542	0.149
3/4"	1.050	0.736	0.157
1"	1.315	0.951	0.182
1-1/4"	1.660	1.272	0.194
1-1/2"	1.900	1.494	0.203
2"	2.375	1.933	0.221
2-1/2"	2.875	2.315	0.280
3"	3.500	2.892	0.304
3-1/2"	4.000	3.358	0.321
4"	4.500	3.818	0.341
4-1/2"	5.000	4.250	0.375
5"	5.563	4.813	0.375
6"	6.625	5.751	0.437
DOUBLE EXTRA HEAVY PIPE SIZES			
1/2"	0.840	0.252	0.294
3/4"	1.050	0.434	0.308
1"	1.315	0.599	0.358
1-1/4"	1.660	0.896	0.382
1-1/2"	1.900	1.100	0.400
2"	2.375	1.503	0.436
2-1/2"	2.875	1.771	0.552
3"	3.500	2.300	0.600
3-1/2"	4.000	2.728	0.636
4"	4.500	3.152	0.674
4-1/2"	5.000	3.580	0.710
5"	5.563	4.063	0.750
6"	6.625	4.897	0.864

Tube dimensions (excepting wall thickness, of double extra heavy) taken from A.S.T.M. Specification B42-33. Tubular values based on a density of 0.322 pound per cubic inch.

* Conductivity of 98% I.A.C.S. at 20° C or 68° F.

SOLID COPPER WIRE
(ASTM B1, B2, & B3)

SIZE AWG (SOLID)	WIRE DIA Inch	HARD DRAWN	MEDIUM DRAWN	SOFT DRAWN
		NORMAL BREAKING LOAD Pounds	MINIMUM BREAKING LOAD Pounds	ELONGATION IN 10 IN. % MIN.
18	.040 30	85.76	67.61	25
17	.045 26	107.5	84.71	25
16	.050 82	135.2	106.2	25
15	.057 07	170.0	133.0	25
14	.064 08	213.8	166.6	25
13	.071 96	268.2	208.0	25
12	.080 81	337.0	261.6	25
11	.090 74	422.5	327.6	25
10	.101 9	529.2	410.4	25
9	.114 4	661.0	514.2	30
8	.128 5	826.0	643.9	30
7	.144 3	1,030	806.6	30
6	.162 0	1,280	1,010	30
5	.181 9	1,591	1,265	30
4	.204 3	1,970	1,584	30
3	.229 4	2,439	1,984	30
2	.257 6	3,003	2,450	30
1	.289 3	3,688	3,024	30
1/0	.324 9	4,519	3,730	35
2/0	.364 8	5,518	4,599	35
3/0	.409 6	6,722	5,667	35
4/0	.460 0	8,143	6,980	35

STRANDED COPPER WIRE
(ASTM B8 EXCLUDING BREAKING LOADS)

SIZE		A.S.T.M. STRANDINGS			HARD DRAWN	MEDIUM DRAWN	SOFT DRAWN
Circular Mills	AWG	Class	No. of Wires	Cable Diameter Inches	Minimum Breaking Load Pounds	Minimum Breaking Load Pounds	Minimum Breaking Load Pounds
					1,022	20	B
1,624	18	B	7	0.045 6	78.99	63.91	51.03
2,583	16	B	7	0.057 6	124.7	100.4	81.14
4,107	14	B	7	0.072 6	197.1	157.7	124.2
6,530	12	B	7	0.091 5	311.1	247.7	197.5
10,380	10	B	7	0.116	491.7	388.9	314.0
13,090	9	B	7	0.130	618.2	487.4	395.9
16,510	8	B	7	0.146	777.2	610.7	499.2
20,820	7	B	7	0.164	977.1	765.2	629.5
26,250	6	B	7	0.184	1,288	958.6	793.8
33,100	5	B	7	0.206	1,542	1,201	1001
41,740	4	AA	3	0.254	1,879	1,465	1213
41,740	4	B&A	7	0.232	1,938	1,505	1262
52,630	3	AA	3	0.285	2,359	1,835	1530

CABLE DATA (Continued)

STRANDED COPPER WIRE (Continued)
(ASTM B8 EXCLUDING BREAKING LOADS)

SIZE		A.S.T.M. STRANDINGS			HARD DRAWN	MEDIUM DRAWN	SOFT DRAWN
STRANDED		Class	No. of Wires	Cable Diameter Inches	Minimum Breaking Load Pounds	Minimum Breaking Load Pounds	Minimum Breaking Load Pounds
Circular Mills	AWG						
52,630	3	B&A	7	0.260	2,433	1,885	1592
66,370	2	AA	3	0.320	2,913	2,299	1929
66,370	2	B&A	7	0.292	3,045	2,361	2007
83,690	1	AA	3	0.360	3,621	2,879	2432
83,690	1	A	7	0.328	3,804	2,958	2432
83,690	1	B	19	0.332	3,899	3,037	2531
105,500	1/0	A&A	7	0.368	4,752	3,705	3067
105,500	1/0	—	12	0.390	4,841	3,755	3191
105,500	1/0	B	19	0.373	4,901	3,805	3191
133,100	2/0	A&A	7	0.414	5,926	4,640	3867
133,100	2/0	—	12	0.438	6,048	4,703	3867
133,100	2/0	B	19	0.419	6,152	4,765	4024
167,800	3/0	A&A	7	0.464	7,366	5,812	4876
167,800	3/0	—	12	0.492	7,556	5,890	4876
167,800	3/0	B	19	0.470	7,698	5,970	5074
211,600	4/0	A&A	7	0.522	9,154	7,278	6149
211,600	4/0	—	12	0.522	9,483	7,378	6149
211,600	4/0	B	19	0.528	9,617	7,479	6149

SIZE		A.S.T.M. STRANDINGS			HARD DRAWN	MEDIUM DRAWN	SOFT DRAWN
Circular Mills	Class	No. of Wires	Cable Diameter Inches	Minimum Breaking Load Pounds	Minimum Breaking Load Pounds	Minimum Breaking Load Pounds	
							250
250	A	19	0.574	11,360	8,986	7265	
250	B	37	0.575	11,560	8,952	7559	
300	AA	12	0.657	13,170	10,390	8718	
300	A	19	0.628	13,510	10,530	8718	
300	B	37	0.630	13,870	10,740	9071	
350	AA	12	0.710	15,140	12,040	10170	
350	A	19	0.679	15,590	12,200	10170	
350	B	37	0.681	16,060	12,450	10580	
400	A&AA	19	0.726	17,810	13,950	11620	
400	B	37	0.728	18,320	14,140	11620	
450	AA	19	0.770	19,750	15,590	13080	
450	B&A	37	0.772	20,450	15,900	13080	
500	AA	19	0.811	21,950	17,320	14530	
500	B&A	37	0.813	22,510	17,550	14530	
600	A&AA	37	0.891	27,020	21,060	17440	
600	B	61	0.893	27,530	21,350	18140	
700	AA	37	0.963	31,170	24,410	20340	
700	B&A	61	0.964	31,820	24,740	20340	
750	AA	37	0.997	33,400	26,150	21790	
750	B&A	61	0.998	34,090	26,510	21790	
800	AA	37	1.029	35,120	27,710	23250	
800	B&A	61	1.031	36,360	28,270	23250	
900	AA	37	1.092	39,510	31,170	26150	
900	B&A	61	1.094	40,520	31,590	26150	
1,000	AA	37	1.151	43,830	34,400	29060	
1,000	B&A	61	1.152	45,030	35,100	29060	
1,250	A	61	1.288	55,670	43,590	36320	
1,250	B	91	1.289	56,280	43,880	36320	
1,500	A	61	1.411	65,840	51,950	43590	
1,500	B	91	1.412	67,540	52,650	43590	
1,750	A	91	1.526	77,930	61,020	50850	
1,750	B	127	1.526	78,800	61,430	50850	
2,000	A	91	1.630	87,790	69,270	58120	
2,000	B	127	1.632	90,050	70,210	58120	

COMPACT STRANDED COPPER CABLE
(ASTM SPEC. B496)

CONDUCTOR SIZE		NUMBER OF WIRES	CONDUCTOR DIAMETER (IN.)
KCMIL (OR)	AWG		
1000		61 ¹	1.060
900		61 ¹	0.999
800		61 ¹	0.938
750		61 ¹	0.908
700		61 ¹	0.877
650		61 ¹	0.845
600		61 ¹	0.813
550		61 ¹	0.775
500		37 ²	0.736
450		37 ²	0.700
400		37 ²	0.659
350		37 ²	0.616
300		37 ²	0.570
250		37 ²	0.520
	4/0	19 ³	0.475
	3/0	19 ³	0.423
	2/0	19 ³	0.376
	1/0	19 ³	0.336
	1	19 ³	0.299
	2	7	0.268
	4	7	0.213
	6	7	0.169
	8	7	0.134

¹ 58 Wires Minimum
² 35 Wires Minimum
³ 18 Wires Minimum

CABLE DATA (Continued)

FLEXIBLE COPPER STRANDED CABLE

CONDUCTOR SIZE KCMIL OR B & S G (AWG)	STRANDING AND DIAMETER	NOMINAL DIAMETER	CLASS
8	41/.0201	.156	I
8	49/.0184	.166	G
8	133/.0111	.167	H
8	168/.010	.157	K
8	420/.0063	.162	M
7	49/.0206	.185	G
7	52/.0201	.185	I
7	133/.0125	.188	H
7	210/.010	.179	K
7	532/.0063	.196	M
6	49/.0231	.208	G
6	63/.0201	.207	I
6	133/.0140	.210	H
6	266/.010	.210	K
6	665/.0063	.215	M
5	49/.0260	.234	G
5	84/.0201	.235	I
5	133/.0158	.237	H
5	336/.010	.235	K
5	836/.0063	.240	M
4	49/.0292	.263	G
4	105/.0201	.263	I
4	133/.0177	.266	H
4	420/.010	.272	K
4	1064/.0063	.269	M
3	49/.0328	.295	G
3	133/.0199	.299	H
3	133/.0201	.291	I
3	532/.010	.304	K
3	1323/.0063	.305	M
2	49/.0368	.331	G
2	133/.0223	.335	H
2	161/.0201	.319	I
2	665/.010	.338	K
2	1666/.0063	.337	M
1	133/.0251	.377	G
1	210/.0201	.367	I
1	259/.018	.378	H
1	836/.010	.397	K
1	2107/.0063	.376	M
1/0	133/.0282	.423	G
1/0	259/.0202	.424	H
1/0	266/.0201	.441	I
1/0	1064/.010	.451	K
1/0	2646/.0063	.423	M
2/0	133/.0316	.474	G
2/0	259/.0227	.477	H
2/0	342/.0201	.500	I
2/0	1323/.010	.470	K
2/0	3325/.0063	.508	M
3/0	133/.0355	.533	G
3/0	259/.0255	.536	H
3/0	418/.0201	.549	I
3/0	1666/.010	.533	K
3/0	4256/.0063	.576	M
4/0	133/.0399	.599	G
4/0	259/.0286	.601	H
4/0	532/.0201	.613	I
4/0	2107/.010	.627	K
4/0	5320/.0063	.645	M

CONDUCTOR SIZE KCMIL OR B & S G (AWG)	STRANDING AND DIAMETER	NOMINAL DIAMETER	CLASS
250	259/.0311	.650	G
250	427/.0242	.653	H
250	637/.0201	.682	I
250	2499/.010	.682	K
250	6384/.0063	.713	M
300	259/.0340	.714	G
300	427/.0265	.716	H
300	735/.0201	.737	I
300	2989/.010	.768	K
300	7581/.0063	.768	M
350	259/.0368	.773	G
350	427/.0286	.772	H
350	882/.0201	.800	I
350	3458/.010	.809	K
350	8806/.0063	.825	M
400	259/.0393	.825	G
400	427/.0306	.826	H
400	980/.0201	.831	I
400	3990/.010	.878	K
400	10101/.0063	.901	M
450	259/.0417	.876	G
450	427/.0325	.878	H
450	1127/.0201	.894	I
450	4522/.010	.933	K
450	11396/.0063	.940	M
500	259/.0439	.922	G
500	427/.0342	.923	H
500	1225/.0201	.941	I
500	5054/.010	.988	K
500	12691/.0063	.997	M
600	427/.0375	1.013	G
600	703/.0292	1.022	H
600	1470/.0201	1.027	I
600	5985/.010	1.125	K
600	14945/.0063	1.084	M
700	427/.0405	1.094	G
700	703/.0316	1.106	H
700	1729/.0201	1.194	I
700	6916/.010	1.207	K
700	17507/.0063	1.183	M
800	427/.0433	1.169	G
800	703/.0337	1.180	H
800	1995/.0201	1.290	I
800	7980/.010	1.305	K
800	20069/.0063	1.256	M
900	427/.0459	1.239	G
900	703/.0358	1.253	H
900	2261/.0201	1.372	I
900	9065/.010	1.323	K
900	22631/.0063	1.331	M
1000	427/.0484	1.307	G
1000	703/.0377	1.320	H
1000	2527/.0201	1.427	I
1000	10101/.010	1.419	K
1000	25193/.0063	1.404	M

CABLE DATA (Continued)

ALUMINUM TUBE

Size of Tube IPS	Diameter of Tube (In.)		Wall Thickness
	Outside	Inside	
Standard Pipe Sizes			
1/4	0.540	0.364	0.088
3/8	0.675	0.493	0.091
1/2	0.840	0.622	0.109
3/4	1.050	0.824	0.113
1	1.315	1.049	0.133
1-1/4	1.660	1.380	0.140
1-1/2	1.900	1.610	0.145
2	2.375	2.067	0.154
2-1/2	2.875	2.469	0.203
3	3.500	3.068	0.216
3-1/2	4.000	3.548	0.226
4	4.500	4.026	0.237
4-1/2	5.000	4.506	0.247
5	5.563	5.047	0.258
6	6.625	6.065	0.280
Extra Heavy Pipe Sizes			
1/4	0.540	0.302	0.119
3/8	0.675	0.423	0.126
1/2	0.840	0.546	0.147
3/4	1.050	0.742	0.154
1	1.315	0.957	0.179
1-1/4	1.660	1.278	0.191
1-1/2	1.900	1.500	0.200
2	2.375	1.939	0.218
2-1/2	2.875	2.323	0.276
3	3.500	2.900	0.300
3-1/2	4.000	3.364	0.318
4	4.500	3.826	0.337
4-1/2	5.000	4.290	0.355
5	5.563	4.813	0.375
6	6.625	5.761	0.432

ALUMINUM 1350 CABLE BARE-CLASS B

Size Circular Mils or AWG	Copper Equivalent based upon equal D.C. resistance, Cu 97% Al 51%	Stranding No. of Wires	Cable Dia. Inches	Ultimate Strength Pounds	Minimum Ultimate Strength Pounds	Minimum Ultimate Strength Pounds Inter Temper
				Hard Drawn	3/4 Hard	
250000	157300	37	0.575	4860	3338	2946
300000	188800	37	0.629	5831	4005	3534
350000	220200	37	0.681	6680	4673	4123
400000	251500	37	0.728	7352	5341	4713
450000	283000	37	0.772	8110	6007	5301
500000	314500	37	0.813	9012	6675	5890
550000	346000	61	0.855	10490	7344	6480
600000	377000	61	0.893	11450	8010	7068
650000	409000	61	0.929	11940	8678	7657
700000	440000	61	0.964	12860	9346	8247
750000	472000	61	0.998	13510	10010	8835
800000	503000	61	1.031	14410	10680	9424
900000	566000	61	1.094	15900	12010	10600
1000000	629000	61	1.152	17670	13350	11780
1100000	692000	91	1.209	20210	14680	12950
1200000	755000	91	1.263	21630	16020	14130
1250000	786000	91	1.289	22530	16690	14720
1300000	818000	91	1.315	23430	17350	15310
1400000	880000	91	1.364	24750	18700	16500
1500000	943000	91	1.412	26500	20020	17670
1600000	1006000	127	1.459	28840	21360	18850
1700000	1069000	127	1.504	30630	22690	20020
1750000	1101000	127	1.526	31530	23350	20610
1800000	1132000	127	1.548	32450	24030	21210
1900000	1195000	127	1.590	33570	25360	22380
2000000	1258000	127	1.632	35340	26700	23560
2500000	1570000	127	1.824	43300	33380	29460
3000000	1890000	169	1.998	53010	40050	35340
3500000	2200000	169	2.158	60610	46730	41230

ALUMINUM 1350 CABLE BARE-CLASSES AA AND A
Hard Drawn

Cable Code Word	Size Circular mils or AWG	Copper Equivalent based upon equal D.C. resistance, Cu 97% Al 61%	No. of Wires	Cable Dia. Inches	Ultimate Strength
					Pounds
Peachbell	6	8	7	0.184	528
Rose	4	6	7	0.232	826
Lily	3	5	7	0.260	1022
Iris	2	4	7	0.292	1266
Pansy	1	3	7	0.328	1537
Poppy	1/0	2	7	0.368	1865
Aster	2/0	1	7	0.414	2350
Phlox	3/0	1/0	7	0.464	2845
Oxlip	4/0	2/0	7	0.522	3590
Daisy	266800	3/0	7	0.586	4525
Laurel	266800	3/0	19	0.593	4800
Tulip	336400	4/0	19	0.666	5940
Canna	397500	250000	19	0.724	6880
Cosmos	477000	300000	19	0.793	8090
Syringa	477000	300000	37	0.795	8600
Dahlia	556500	350000	19	0.856	9440

Cable Code Word	Size Circular mils or AWG	Copper Equivalent based upon equal D.C. resistance, Cu 97% Al 61%	No. of Wires	Cable Dia. Inches	Ultimate Strength
					Pounds
Mistletoe	556500	350000	37	0.858	9830
Orchid	636000	400000	37	0.918	11240
Violet	715500	450000	37	0.974	12640
Nasturtium	715500	450000	61	0.975	13150
Arbutus	795000	500000	37	1.026	13770
Lilac	795000	500000	61	1.028	14330
Anemone	874500	550000	37	1.077	14830
Crocus	874500	550000	61	1.078	15760
Magnolia	954000	600000	37	1.124	16180
Goldenrod	954000	600000	61	1.126	16860
Bluebell	1033500	650000	37	1.170	17530
Larkspur	1033500	650000	61	1.172	18260
Marigold	1113000	700000	61	1.216	19660
Narcissus	1272000	800000	61	1.300	22000
Carnation	1431000	900000	61	1.379	24300
Coreopsis	1590000	1000000	61	1.454	27000
Dogwood	1590000	1000000	91	1.454	28100

CABLE DATA (Continued)

ACSR

ACSR				Diameter		Copper Equivalent based upon equal D.C. resistance Cu 97% Al 61%	Ultimate Strength Pounds	ACSR				Diameter		Copper Equivalent based upon equal D.C. resistance Cu 97% Al 61%	Ultimate Strength Pounds
Code Word	Cir. Mils. or AWG	Stranding Number of Strands		Inches				Code Word	Cir. Mils. or AWG	Stranding Number of Strands		Inches			
		Alum.	Steel	Complete cable	Steel Core					Alum.	Steel	Complete cable	Steel Core		
Turkey	6	6	1	0.198	0.0661	8	1170	Hen	477000	30	7	0.883	0.3783	300000	23300
Thrush	5	6	1	0.223	0.0743	7	1460	Parakeet	556500	24	7	0.914	0.3045	350000	19850
Swan	4	6	1	0.250	0.0834	6	1830	Dove	556500	26	7	0.927	0.341	350000	22400
Swanate	4	7	1	0.257	0.1029	6	2288	Eagle	556500	30	7	0.953	0.409	350000	27200
Swallow	3	6	1	0.281	0.0937	5	2250	Peacock	605000	24	7	0.953	0.318	380500	21500
Sparrow	2	6	1	0.316	0.1052	4	2790	Squab	605000	26	7	0.966	0.356	380500	24100
Sparate	2	7	1	0.325	0.1299	4	3525	Teal	605000	30	19	0.994	0.426	380500	30000
Robin	1	6	1	0.355	0.1182	3	3480	Rook	636000	24	7	0.977	0.326	400000	22600
Raven	1/0	6	1	0.398	0.1327	2	4280	Grosbeak	636000	26	7	0.990	0.365	400000	25000
Quail	2/0	6	1	0.447	0.1490	1	5345	Egret	636000	30	19	1.019	0.437	400000	31500
Pigeon	3/0	6	1	0.502	0.1672	1/0	6675	Flamingo	666600	24	7	1.000	0.333	419000	23700
Penquin	4/0	6	1	0.563	0.1878	2/0	8420	Crow	715500	54	7	1.036	0.345	450000	26300
Waxwing	266800	18	1	0.609	0.1217	3/0	7100	Starling	715500	26	7	1.051	0.387	450000	28100
Owl	266800	26	7	0.633	0.2109	3/0	9645	Redwing	715500	30	19	1.081	0.463	450000	34600
Partridge	266800	26	7	0.642	0.2364	3/0	11250	Condor	795000	54	7	1.093	0.364	500000	28500
Ostrich	300000	26	7	0.680	0.2505	188700	12650	Drake	795000	26	7	1.108	0.408	500000	31200
Merlin	336400	18	1	0.684	0.1367	4/0	8950	Mallard	795000	30	19	1.140	0.489	500000	38400
Linnet	336400	26	7	0.721	0.2655	4/0	14050	Crane	874500	54	7	1.146	0.382	550000	31400
Oriole	336400	30	7	0.741	0.3177	4/0	17040	Canary	900000	54	7	1.162	0.387	566000	32300
Chickadee	397500	18	1	0.743	0.1486	250000	10400	Cardinal	954000	54	7	1.196	0.399	600000	34200
Brant	397500	24	7	0.771	0.2575	250000	14690	Curllew	1033500	54	7	1.246	0.415	650000	37100
Ibis	397500	26	7	0.783	0.2883	250000	16190	Finch	1113000	54	19	1.293	0.431	700000	40200
Lark	397500	30	7	0.806	0.3453	250000	19980	Pheasant	1272000	54	19	1.382	0.461	800000	44800
Pelican	477000	18	1	0.814	0.1628	300000	12300	Plover	1431000	54	19	1.465	0.489	900000	50400
Flicker	477000	24	7	0.846	0.2820	300000	17200	Falcon	1590000	54	19	1.545	0.515	1000000	56000
Hawk	477000	26	7	0.858	0.3162	300000	19430								

HIGH STRENGTH ACSR

ACSR				Diameter		Copper Equivalent based upon equal D.C. resistance Cu 97% Al 61%	Ultimate Strength Pounds
Code Word	Cir. Mils. or AWG	Stranding Number of Strands		Inches			
		Alum.	Steel	Complete cable	Steel Core		
Grouse	80000	8	1	0.367	0.1670	50310	5200
Petrel	101800	12	7	0.461	0.2763	64160	9860
Minorca	110800	12	7	0.481	0.2883	69700	10730
Leghorn	134600	12	7	0.530	0.3177	84600	12920
Guinea	159000	12	7	0.576	0.3453	100000	15200
Dotterel	176900	12	7	0.607	0.3642	111200	16440
Dorking	190800	12	7	0.631	0.3783	120000	17730
Cochin	211300	12	7	0.663	0.3981	132900	19640
Brahma	203200	16	9	0.714	0.4885	127800	27500

CABLE DATA (Continued)

**COMPACT ALUMINUM 1350 CABLE
(ASTM B400) EXTRA HARD**

Conductor Size		Class	Number of Wire	Conductor Diameter Inches	Breaking Strength Lbs.
KCMIL	AWG				
1000		B	61 ¹	1.060	17,700
900		B	61 ¹	0.999	15,900
800		B	61 ¹	0.938	14,400
750		B	61 ¹	0.908	13,500
700		B	61 ¹	0.877	12,900
650		B	61 ¹	0.845	11,900
600		B	61 ¹	0.813	11,500
556		AA	19 ³	0.780	9,750
550		B	61 ¹	0.775	10,500
500		B	37 ²	0.736	9,110
500		AA	19 ³	0.736	8,760
477		AA	19 ³	0.722	8,360
450		B	37 ²	0.700	8,200
400		B	37 ²	0.659	7,440
397		AA, A	19 ³	0.659	7,110
350		B	37 ²	0.616	6,760
350		A	19 ³	0.616	6,390
336		A	19 ³	0.603	6,150
336		AA	7	0.603	5,960
300		B	37 ²	0.570	5,890
300		A	19 ³	0.570	5,480
300		AA	7	0.570	5,430
266		A	19 ³	0.537	4,970
266		AA	7	0.537	4,830
250		B	37 ²	0.520	4,910
250		A	19 ³	0.520	4,660
250		AA	7	0.520	4,520
	4/0	B	19 ³	0.475	4,020
	4/0	AA, A	7	0.475	3,830
	3/0	B	19 ³	0.423	3,310
	3/0	AA, A	7	0.423	3,040
	2/0	B	19 ³	0.376	2,670
	2/0	AA, A	7	0.376	2,510
	1/0	B	19 ³	0.336	2,160
	1/0	AA, A	7	0.336	1,990
	1	B	19 ³	0.299	1,740
	1	AA, A	7	0.299	1,640
	2	AA, A, B	7	0.268	1,350
	3	A, B	7	0.238	1,090
	4	A, B	7	0.213	.881
	6	A, B	7	0.169	.563
	8	A, B	7	0.134	.312

¹ 58 wires minimum
² 35 wires minimum
³ 18 wires minimum

**ALUMINUM ALLOY 5005 CABLE
(ASTM B397)**

Conductor Size cmil	Number of Wires	Approx. Aluminum 1350 Size having Equivalent Resistance		Size & Stranding of ACSR with Equal Diameter			Rated Strength Lbs.
		cmil	AWG	cmil	AWG	Stranding	
927,200	37	795,000	—	795,000	—	26/7	23,900
740,800	37	636,000	—	636,000	—	26/7	19,300
652,400	19	556,500	—	556,500	—	26/7	16,200
587,200	19	506,500	—	556,500	—	18/1	14,600
559,500	19	477,000	—	477,000	—	26/7	13,900
503,600	19	435,500	—	477,000	—	18/1	12,500
465,400	19	397,500	—	397,500	—	26/7	12,200
419,400	19	362,000	—	397,500	—	18/1	11,200
394,500	19	336,400	—	336,400	—	26/7	10,500
355,100	19	306,400	—	336,400	—	18/1	9,600
312,800	19	266,800	—	266,800	—	26/7	8,450
281,400	19	242,900	—	266,800	—	18/1	7,610
246,900	7	211,600	4/0	211,600	4/0	6/1	6,330
195,700	7	167,800	3/0	167,800	3/0	6/1	5,020
155,400	7	133,100	2/0	133,100	2/0	6/1	4,280
123,300	7	105,600	1/0	105,600	1/0	6/1	3,440
77,470	7	66,360	2	66,360	2	6/1	2,200
48,690	7	41,740	4	41,740	4	6/1	1,430
30,580	7	26,240	6	26,240	6	6/1	922

**ALUMINUM ALLOY 6201 CABLE
(ASTM B399)**

Conductor Size cmil	Number of Wires	Approx. Aluminum 1350 Size having Equivalent Resistance		Size & Stranding of ACSR with Equal Diameter			Rated Strength Lbs.
		cmil	AWG	cmil	AWG	Stranding	
1439,200	61	1272,000	—	1272,000	—	54/7	46,800
1348,800	61	1192,500	—	1192,500	—	54/7	43,900
1259,600	61	1113,000	—	1113,000	—	54/7	41,000
1165,100	61	1033,500	—	1033,500	—	54/7	37,900
1077,400	61	954,000	—	954,000	—	54/7	35,000
927,200	37	795,000	—	795,000	—	26/7	30,500
740,800	37	636,000	—	636,000	—	26/7	24,400
652,400	19	556,500	—	556,500	—	26/7	21,900
559,500	19	477,000	—	477,000	—	26/7	18,800
465,400	19	397,500	—	397,500	—	26/7	15,600
394,500	19	336,400	—	336,400	—	26/7	13,300
312,800	19	266,800	—	266,800	—	26/7	11,000
246,900	7	211,600	4/0	211,600	4/0	6/1	8,560
195,700	7	167,800	3/0	167,800	3/0	6/1	6,790
155,400	7	133,100	2/0	133,100	2/0	6/1	5,390
123,300	7	105,600	1/0	105,600	1/0	6/1	4,460
77,470	7	66,360	2	66,360	2	6/1	2,800
48,690	7	41,740	4	41,740	4	6/1	1,760
30,580	7	26,240	6	26,240	6	6/1	1,110

CABLE DATA (Continued)

ALUMINUM ALLOY 8000 SERIES "O" TEMPER CABLE (ASTM B801)

CONDUCTOR SIZE		NUMBER OF WIRES†	CLASS	CONDUCTOR DIAMETER			MIN. BREAKING STRENGTH LBS.
KCMIL	AWG			Conventional In.	Compressed In.	Compact In.	
1000		127	D	1.153	1.119	1.060	6010
1000		91	C	1.153	1.118	1.060	6010
1000		61	B, A	1.152	1.117	1.060	6010
900		127	D	1.095	1.062	0.999	5400
900		91	C	1.093	1.060	0.999	5400
900		61	B, A	1.093	1.060	0.999	5400
800		127	D	1.032	1.001	0.938	4800
800		91	C	1.032	1.001	0.938	4800
800		61	B, A	1.031	1.000	0.938	4800
750		127	D	0.998	0.968	0.908	4500
750		91	C	0.999	0.969	0.908	4500
750		61	B, A	0.998	0.968	0.908	4500
700		127	D	0.965	0.936	0.877	4200
700		91	C	0.965	0.936	0.877	4200
700		61	B, A	0.964	0.935	0.877	4200
650		127	D	0.930	0.902	0.845	3900
650		91	C	0.930	0.902	0.845	3900
650		61	B	0.929	0.901	0.845	3900
650		37	A	0.928	0.900	0.845	3950
600		127	D	0.893	0.866	0.813	3600
600		91	C	0.893	0.866	0.813	3600
600		61	B	0.893	0.866	0.813	3600
600		37	A	0.891	0.864	0.813	3640
556		127	D	0.861	0.835	0.780	3340
556		91	C	0.860	0.834	0.780	3340
556		61	B	0.860	0.834	0.780	3340
556		37	A	0.858	0.832	0.780	3380
550		127	D	0.855	0.829	0.775	3300
550		91	C	0.855	0.829	0.775	3300
550		61	B	0.855	0.829	0.775	3300
550		37	A	0.853	0.827	0.775	3340
500		91	D	0.815	0.791	0.736	3000
500		61	C	0.815	0.791	0.736	3000
500		37	B, A	0.813	0.789	0.736	3040
477		91	D	0.796	0.772	0.722	2860
477		61	C	0.796	0.772	0.722	2860
477		37	B, A	0.795	0.771	0.722	2900
450		91	D	0.773	0.750	0.700	2700
450		61	C	0.773	0.750	0.700	2700
450		37	B, A	0.772	0.749	0.700	2730
400		91	D	0.729	0.707	0.659	2400
400		61	C	0.729	0.707	0.659	2400
400		37	B, A	0.728	0.706	0.659	2430
397		91	D	0.727	0.705	0.659	2390
397		61	C	0.726	0.704	0.659	2390
397		37	B	0.725	0.703	0.659	2410
397		19	A	0.724	0.702	0.659	2470
350		91	D	0.682	0.661	0.616	2100
350		61	C	0.681	0.661	0.616	2100
350		37	B	0.681	0.661	0.616	2130
350		19	A	0.679	0.659	0.616	2170
336		61	C	0.669	0.649	0.603	2020
336		37	B	0.668	0.648	0.603	2040
336		19	A	0.666	0.646	0.603	2090
300		61	C	0.631	0.612	0.570	1800
300		37	B	0.630	0.611	0.570	1820
300		19	A	0.629	0.610	0.576	1860
266		61	C	0.595	0.577	0.537	1600
266		37	B	0.594	0.576	0.537	1620
266		19	A	0.593	0.575	0.537	1660
250		61	C	0.576	0.559	0.520	1500

CABLE DATA (Continued)

ALUMINUM ALLOY 8000 SERIES “O” TEMPER CABLE (Continued)

CONDUCTOR SIZE		NUMBER OF WIRES†	CLASS	CONDUCTOR DIAMETER			MIN. BREAKING STRENGTH LBS.
KCMIL	AWG			Conventional In.	Compressed In.	Compact In.	
250		37	B	0.575	0.558	0.520	1520
250		19	A	0.574	0.557	0.520	1550
	4/0	37	C	0.529	0.513	0.475	1280
	4/0	19	B	0.528	0.512	0.475	1310
	4/0	7	A	0.522	0.506	0.475	1360
	3/0	37	C	0.471	0.457	0.423	1020
	3/0	19	B	0.470	0.456	0.423	1040
	3/0	7	A	0.464	0.450	0.423	1070
	2/0	19	B	0.419	0.406	0.376	826
	2/0	7	A	0.414	0.402	0.376	853
	1/0	19	B	0.373	0.362	0.336	655
	1/0	7	A	0.368	0.357	0.336	676
	1	19	B	0.332	0.322	0.229	519
	2	7	B, A	0.292	0.283	0.268	425
	3	7	B, A	0.260	0.252	0.238	337
	4	7	B, A	0.232	0.225	0.213	267
	6	7	B, A	0.184	0.178	0.169	168
	8	7	B, A	0.146	0.142	0.134	106

† For compact-stranded constructions, the number of wires may be reduced as follows:
 19-Wire Constructions - 18 Wires Minimum
 37-Wire Constructions - 35 Wires Minimum
 61-Wire Constructions - 58 Wires Minimum
 91-Wire Constructions - 87 Wires Minimum
 127-Wire Constructions - 122 Wires Minimum

COMPACT ACSR (ASTM B401)

CONDUCTOR SIZE		CONDUCTOR DIAMETER (IN.)	BREAKING STRENGTH (LB)
KCMIL	AWG		
336.4		0.628	8,260
266.8		0.559	6,540
	4/0	0.517	7,420
	3/0	0.461	5,880
	2/0	0.410	4,880
	1/0	0.365	3,980
	1	0.326	3,290
	2	0.298	3,260
	2	0.290	2,640
	3	0.258	2,130
	4	0.236	2,160
	4	0.229	1,760
	6	0.182	1,120

ACSR/TW (TRAP WIRE) CABLE (ASTM B779)

CONDUCTOR SIZE KCMIL	STRANDING		NOMINAL DIAMETER INCHES	RATED STRENGTH LBS
	Number of Aluminum Wires	Number of Steel Wires		
336.4	14	1	0.63	8,600
477.0	18	7	0.78	17,200
477.0	18	7	0.79	19,400
556.5	18	7	0.84	20,000
556.5	20	7	0.85	22,600
636.0	27	1	0.85	13,500
636.0	18	7	0.89	22,900
636.0	20	7	0.91	25,400
795.0	17	7	0.96	21,000
795.0	18	7	0.98	25,900

ACSR/TW (TRAP WIRE) CABLE (Continued)

CONDUCTOR SIZE KCMIL	STRANDING		NOMINAL DIAMETER INCHES	RATED STRENGTH LBS
	Number of Aluminum Wires	Number of Steel Wires		
405.1	14	1	0.68	10,200
571.7	18	7	0.85	20,600
565.3	20	7	0.86	22,900
664.8	20	7	0.93	26,600
666.6	20	7	0.91	24,000
762.8	20	7	0.99	30,500
768.2	20	7	0.98	27,700
768.9	27	1	0.93	16,400
795.0	20	7	0.99	28,200
795.0	20	7	1.01	31,800
946.7	35	7	1.08	29,600
954.0	30	7	1.05	23,700
954.0	32	7	1.06	25,900
954.0	20	7	1.08	33,500
957.2	32	7	1.06	26,000
1033.5	30	7	1.09	25,700
1033.5	32	7	1.10	28,100
1033.5	21	7	1.13	36,300
1113.0	30	7	1.13	27,500
1113.0	33	7	1.14	30,000
1113.0	38	19	1.19	39,100
1192.5	30	7	1.17	29,500
1192.5	33	7	1.18	32,400
1192.5	38	19	1.22	41,900
1272.0	30	7	1.20	31,400
1272.0	35	7	1.22	34,600
1272.0	39	19	1.26	44,100
1351.5	35	7	1.26	36,700
1351.5	39	19	1.30	46,800
1431.0	36	7	1.29	38,900
1431.0	39	19	1.34	49,600
1590.0	36	7	1.36	42,200
1590.0	42	19	1.41	55,100
1780.0	37	19	1.45	50,700
2156.0	64	19	1.61	61,100

CABLE DATA (Continued)

ACSR/TW (TRAP WIRE) CABLE (Continued)

CONDUCTOR SIZE KCMIL	STRANDING		NOMINAL DIAMETER INCHES	RATED STRENGTH LBS
	Number of Aluminum Wires	Number of Steel Wires		
959.6	22	7	1.11	37,000
966.2	21	7	1.09	34,000
1158.0	33	7	1.17	31,600
1158.4	25	7	1.20	39,600
1168.1	30	7	1.16	28,900
1233.6	38	19	1.25	42,900
1257.1	35	7	1.21	34,200
1272.0	30	7	1.20	31,400
1334.6	39	19	1.29	46,300
1359.7	36	7	1.26	36,900
1372.5	30	7	1.25	33,400
1433.6	39	19	1.34	49,700
1455.3	36	7	1.30	39,200
1467.8	33	7	1.29	35,800
1533.3	39	19	1.38	53,200
1557.4	36	7	1.35	41,900
1569.0	33	7	1.33	38,200
1622.0	39	19	1.42	57,500
1657.4	36	7	1.39	44,000
1730.6	39	19	1.47	59,400
1758.6	37	19	7.14	34,600
1926.9	42	19	1.55	65,300
1949.6	42	7	1.50	51,900
2153.8	64	19	1.60	61,100
2627.3	64	19	1.76	74,500

AAC/TW (ALL ALUMINUM TRAP WIRE)
(ASTM B778)

CONDUCTOR SIZE, KCMIL	NOMINAL DIAMETER, IN.	NUMBER OF WIRES	RATED STRENGTH, LBF
336.4	0.612	17	6,220
397.5	0.661	17	7,230
477.0	0.720	17	8,530
500.0	0.736	17	8,940
556.5	0.775	17	9,950
600.0	0.803	17	10,700
636.0	0.825	17	11,400
700.0	0.864	17	12,500
750.0	0.893	17	13,400
795.0	0.919	17	13,900
900.0	0.990	31	15,800
954.0	1.018	31	16,700
1000.0	1.041	31	17,500
1033.5	1.057	31	18,100
1113.0	1.095	31	19,500
1192.5	1.132	31	20,900
1272.0	1.168	31	22,300
1351.5	1.202	31	23,700
1431.0	1.236	31	24,600
1590.0	1.315	49	27,300
1750.0	1.377	49	30,000
2000.0	1.468	49	34,300

ACAR CABLE‡
(ASTM B524)

CONDUCTOR SIZE		NUMBER OF WIRES	NOMINAL OUTSIDE DIAMETER
KCMIL	AWG		
2000		91	1.630
2000		61	1.630
1900		61	1.588
1800		61	1.546
1750		61	1.525
1700		61	1.502
1600		61	1.458
1500		61	1.411
1400		61	1.364
1300		61	1.314
1300		37	1.312
1250		61	1.288
1250		37	1.287
1200		61	1.263
1200		37	1.261
1100		61	1.209
1100		37	1.207
1000		61	1.152
1000		37	1.151
950		37	1.121
900		37	1.092
850		37	1.061
800		37	1.029
750		37	0.997
700		37	0.962
650		37	0.928
600		37	0.891
600		19	0.888
550		37	0.853
550		19	0.850
500		37	0.813
500		19	0.811
450		19	0.770
400		19	0.726
350		19	0.678
300		19	0.628
250		19	0.574
246.9		7	0.563
	4/0	7	0.522
195.7		7	0.502
	3/0	7	0.464
155.4		7	0.447
	2/0	7	0.414
123.3		7	0.398
	1/0	7	0.368
77.4		7	0.316
	2	7	0.292
48.6		7	0.250
	4	7	0.232
30.5		7	0.198

CABLE DATA (Continued)

SSAC CABLE

SIZE AWG OR KCMIL	STRANDING		CONDUCTOR DIAMETER	RATED STRENGTH POUNDS
	ALUMINUM	STEEL		
266.8	22	7	.622	6030
266.8	24	7	.633	7410
266.8	26	7	.642	8880
266.8	30	7	.660	11700
300.0	26	7	.680	9970
336.4	20	7	.692	5990
336.4	22	7	.701	7610
336.4	24	7	.710	9340
336.4	26	7	.720	11200
336.4	30	7	.741	14800
397.5	20	7	.752	7090
397.5	22	7	.762	8990
397.5	24	7	.772	11000
397.5	26	7	.783	13000
397.5	30	7	.806	17500
477.0	20	7	.823	8490
477.0	22	7	.834	10800
477.0	24	7	.846	13000
477.0	26	7	.858	15600
477.0	30	7	.883	21000
500.0	30	7	.904	22000
556.5	20	7	.890	9910
556.5	22	7	.901	12600
556.5	24	7	.914	15200
556.5	26	7	.927	18200
556.5	30	7	.953	24500
605.0	24	7	.953	16500
605.0	26	7	.966	19700
605.0	30	7	.994	26000
605.0	30	19	.994	26600
636.0	20	7	.951	11300
636.0	22	7	.963	14100
636.0	24	7	.977	17300
636.0	26	7	.990	20700
636.0	30	7	1.019	27400
636.0	30	19	1.019	28000
666.6	24	7	1.000	18200
666.6	26	7	1.104	21700
715.5	24	7	1.036	19500
715.5	26	7	1.051	23300
715.5	30	19	1.081	30800
795.0	42	7	1.055	11800
795.0	20	7	1.063	14200
795.0	45	7	1.063	14200
795.0	22	7	1.077	17700
795.0	24	7	1.092	21700
795.0	54	7	1.092	21700
795.0	26	7	1.108	25900
795.0	30	19	1.140	34300
900.0	45	7	1.131	15800
900.0	54	7	1.162	24600
954.0	42	7	1.155	14200
954.0	20	7	1.185	16700
954.0	45	7	1.165	16700
954.0	48	7	1.175	19700
954.0	24	7	1.196	26000
954.0	54	7	1.196	26000
954.0	30	19	1.248	41100

SSAC CABLE (Continued)

SIZE AWG OR KCMIL	STRANDING		CONDUCTOR DIAMETER	RATED STRENGTH POUNDS
	ALUMINUM	STEEL		
1033.5	42	7	1.203	15400
1033.5	45	7	1.212	18100
1033.5	48	7	1.222	21300
1033.5	54	7	1.245	28200
1113.0	42	7	1.248	16300
1113.0	45	7	1.259	19500
1113.0	48	7	1.269	23000
1113.0	54	19	1.293	30400
1192.5	42	7	1.292	17500
1192.5	45	7	1.302	20900
1192.5	48	7	1.313	24600
1192.5	54	19	1.338	32600
1272.0	42	7	1.334	18700
1272.0	45	7	1.345	22300
1272.0	48	7	1.357	26200
1272.0	54	19	1.382	34100
1351.5	42	7	1.376	19900
1351.5	45	7	1.386	23700
1351.5	48	7	1.398	27900
1351.5	54	19	1.424	36200
1431.0	42	7	1.415	21000
1431.0	45	7	1.427	25100
1431.0	48	7	1.439	29500
1431.0	54	19	1.465	38400
1510.5	45	7	1.466	26500
1510.5	54	19	1.505	40500
1590.0	42	7	1.492	23400
1590.0	45	7	1.504	27900
1590.0	48	7	1.517	32200
1590.0	54	19	1.545	42600
1780.0	84	19	1.602	35400
1869.0	68	7	1.603	21500
2034.5	72	7	1.681	27200

CABLE DATA

SOLID COPPERWELD CABLE (ASTM B227)

Conductor Size (AWG)	Nominal Diameter (Inches)	Circular Mils	Minimum Breaking Load (lbs.)			
			Grade 40 HS	Grade 40 EHS	Grade 30 HS	Grade 30 EHS
4	0.2043	41,740	3,540	—	3,934	4,671
5	0.1819	33,090	2,937	—	3,249	3,911
—	0.1650*	27,230	2,779	—	2,779	3,367
6	0.1620	26,240	2,679	—	2,679	3,246
7	0.1443	20,820	2,207	—	2,207	2,681
8	0.1285	16,510	1,816	—	1,816	2,205
—	0.1280*	16,380	1,802	—	1,802	2,188
9	0.1144	13,090	1,491	—	1,491	1,790
—	0.1040*	10,820	1,283	1,325	1,283	1,487
10	0.1019	10,380	1,231	—	1,231	1,460
12	0.0808	6,530	774	—	774	918
—	0.0800*	6,400	759	—	759	900
—	0.0640*	4,096	485	—	485	576
18	0.0403	1,624	193	—	193	228
—	0.0390*	1,521	180	—	180	214
20	0.0320	1,024	121	—	121	144


* These diameters are often employed by purchasers for communication lines BUT are not in the American Wire Gauge (B & S Wire Gauge) series, as are the other diameters listed.

STRANDED COPPERWELD CABLE (ASTM B228)

Nominal Diameter† (Inch) Size A.W.G.‡	Circular Mils	Diameter* (Inch)	Breaking Load Lbs.**		
			High Strength		Extra High Strength
			40% Cond.	30% Cond.	30% Cond.
7/8 (19 No. 5)	628,900	.910	50,240	55,570	66,910
13/16 (19 No. 6)	498,800	.810	41,600	45,830	55,530
23/32 (19 No. 7)	395,500	.721	34,390	37,740	45,850
27/32 (19 No. 8)	313,700	.642	28,380	31,040	37,690
9/16 (19 No. 9)	248,800	.572	23,390	25,500	30,610
5/8 (7 No. 4)	292,200	.613	22,310	24,780	29,430
9/16 (7 No. 5)	231,700	.546	18,510	20,470	24,650
1/2 (7 No. 6)	183,800	.486	15,330	16,890	20,460
7/16 (7 No. 7)	145,700	.433	12,670	13,910	16,890
3/8 (7 No. 8)	115,600	.385	10,460	11,440	13,890
11/32 (7 No. 9)	91,650	.343	8,616	9,393	11,280
5/16 (7 No. 10)	72,680	.306	7,121	7,758	9,196
3 No. 5	99,310	.392	8,373	9,262	11,860
3 No. 6	78,750	.349	6,934	7,639	9,754
3 No. 7	62,450	.311	5,732	6,291	7,922
3 No. 8	49,530	.277	4,730	5,174	6,282
3 No. 9	39,280	.247	3,898	4,250	5,129
3 No. 10	31,150	.220	3,221	3,509	4,160
3 No. 12	19,590	.174	2,236	—	—

COPPERWELD-COPPER CABLE (ASTM B229)

Conductor Size Hard Drawn Copper Equivalent	cmil	AWG	TYPE	Nominal Diameter of Conductor (inches)	Minimum Breaking Load (pounds)
350,000	—	EK	0.735	23,850	
350,000	—	V	0.754	23,480	
300,000	—	E	0.729	27,770	
300,000	—	EK	0.680	20,960	
300,000	211,600	V	0.698	20,730	
250,000	—	E	0.666	23,920	
250,000	—	EK	0.621	17,840	
250,000	—	V	0.637	17,420	
—	—	E	0.613	20,730	
211,600	4/0	G	0.583	15,640	
211,600	4/0	EK	0.571	15,370	
211,600	4/0	V	0.586	15,000	
211,600	4/0	F	0.529	12,290	
167,800	3/0	E	0.545	16,800	
167,800	3/0	J	0.555	16,170	
167,800	3/0	G	0.519	12,860	
167,800	3/0	EK	0.509	12,370	
167,800	3/0	V	0.522	12,200	
167,800	3/0	F	0.490	9,990	
133,100	2/0	K	0.534	17,600	
133,100	2/0	J	0.494	13,430	
133,100	2/0	G	0.463	10,510	
133,100	2/0	V	0.465	9,846	
133,100	2/0	F	0.436	8,094	
105,600	1/0	K	0.475	14,490	
105,600	1/0	J	0.440	10,970	
105,600	1/0	G	0.412	8,563	
105,600	1/0	F	0.388	6,536	
83,690	1	N	0.464	15,410	
83,690	1	K	0.423	11,900	
83,690	1	J	0.392	9,000	
83,690	1	G	0.367	6,956	
83,690	1	F	0.346	5,266	
66,360	2	P	0.462	16,870	
66,360	2	N	0.413	12,680	
66,360	2	K	0.377	9,730	
66,360	2	J	0.349	7,322	
66,360	2	A	0.366	5,876	
66,360	2	F	0.327	5,626	
66,360	2	G	0.308	4,233	
55,820	3	P	0.411	13,910	
52,620	3	N	0.368	10,390	
52,620	3	K	0.336	7,910	
52,620	3	J	0.311	5,955	
52,620	3	A	0.326	4,810	
41,740	4	P	0.366	11,420	
41,740	4	N	0.328	8,460	
41,740	4	D	0.348	7,340	
41,740	4	A	0.290	3,938	
33,090	5	P	0.326	9,311	
33,090	5	D	0.310	6,035	
33,090	5	A	0.258	3,193	
26,240	6	D	0.276	4,942	
26,240	6	A	0.230	2,585	
26,240	6	C	0.225	2,143	
20,820	7	D	0.246	4,022	
20,820	7	A	0.223	2,754	
16,510	8	D	0.219	3,256	
16,510	8	A	0.199	2,233	
16,510	8	C	0.179	1,362	
11,750	9	D	0.174	1,743	

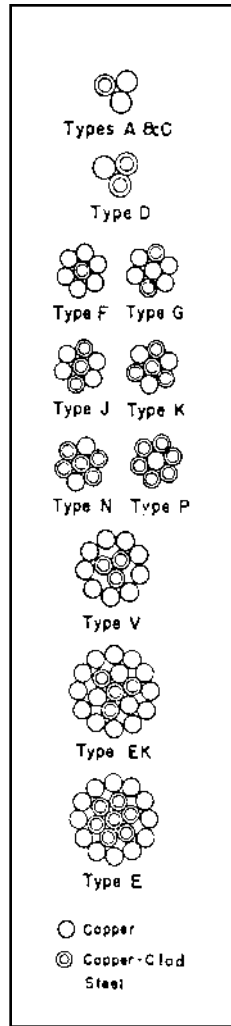

† The designation "Inch" is the approximate diameter in proper fraction of an inch.
‡ The designation "AWG" is a combination of the number of wires each of the American Wire Gauge size indicated by "No."
* Diameter of circumscribing.
** Breaking loads of 7-wire and 19-wire conductors are taken as 90% of the sum of the breaking loads of individual wires; breaking load of 3-wire conductors is taken as 95% of the sum of the breaking loads of the individual wires.

GALVANIZED STEEL CABLE (ASTM A475)

Inches	Nominal Diameter of Strand (mm)	Number of Wires in Strand	Minimum Breaking Load (lbs.)				
			Utilities Grade	Common Grade	Siemens-Martin Grade	High-Strength Grade	Extra High-Strength Grade
1/8	(3.18)	7	—	540	910	1,330	1,830
5/32	(3.97)	7	—	870	1,470	2,140	2,940
3/16	(4.76)	7	—	1,150	1,900	2,850	3,990
3/16	(4.76)	7	2,400	—	—	—	—
7/32	(5.56)	3	—	1,400	2,340	3,500	4,900
7/32	(5.56)	7	—	1,540	2,560	3,850	5,400
1/4	(6.35)	3	3,150	1,860	3,040	4,730	6,740
1/4	(6.35)	3	4,500	—	—	—	—
1/4	(6.35)	7	—	1,900	3,150	4,750	6,650
9/32	(7.14)	3	—	2,080	3,380	5,260	7,500
9/32	(7.14)	7	4,600	2,570	4,250	6,400	8,950
5/16	(7.94)	3	6,500	2,490	4,090	6,350	9,100
5/16	(7.94)	7	—	3,200	5,350	8,000	11,200
5/16	(7.94)	7	6,000	—	—	—	—
3/8	(9.52)	3	8,500	3,330	5,560	8,360	11,800
3/8	(9.52)	7	11,500	4,250	6,950	10,800	15,400
7/16	(11.11)	7	18,000	5,700	9,350	14,500	20,800
1/2	(12.70)	7	25,000	7,400	12,100	18,800	26,900
1/2	(12.70)	19	—	7,620	12,700	19,100	26,700
9/16	(14.29)	7	—	9,600	15,700	24,500	35,000
9/16	(14.29)	19	—	9,640	16,100	24,100	33,700
5/8	(15.88)	7	—	11,600	19,100	29,600	42,400
5/8	(15.88)	19	—	11,000	18,100	28,100	40,200
3/4	(19.05)	19	—	16,000	26,200	40,800	58,300
7/8	(22.22)	19	—	21,900	35,900	55,800	79,700
1	(25.40)	9	—	28,700	47,000	73,200	104,500
1	(25.40)	37	—	28,300	46,200	71,900	102,700
1-1/8	(28.58)	37	—	36,000	58,900	91,600	130,800
1-1/4	(31.75)	37	—	44,600	73,000	113,600	162,200

CABLE DATA

ALUMINUM-COATED STEEL CABLE (ASTM A474)

NOMINAL DIAMETER OF STRAND (IN.)	NUMBER OF WIRES IN STRAND	MINIMUM BREAKING STRENGTH, lbf				
		UTILITIES GRADE*	COMMON GRADE	SIEMANS-MARTIN GRADE	HIGH-STRENGTH GRADE	EXTRA HIGH-STRENGTH GRADE
3/16	7		1,150	1,900	2,850	
3/16	7	2,400				
1/4	3	3,150				
1/4	3	4,500				
1/4	7		1,900	3,150	4,750	6,650
9/32	7	4,600				
5/16	3	6,500				
5/16	7		3,200	5,350	8,000	11,200
5/16	7	6,000				
3/8	3	8,500				
3/8	7	11,500	4,250	6,950	10,800	15,400
7/16	7	18,000	5,350	9,350	14,500	20,800
1/2	7	25,000	7,400	12,100	18,800	26,900

* The Utilities Grade is used principally by communications and power and light industries.





















AWG VS. METRIC WIRE SIZES

CIRC. MILS	EQUIVALENT CIRC. MILS	AWG. SIZE	METRIC WIRE SIZE MM	STRANDING/WIRE DIAMETER PER STRAND		APPROXIMATE OVERALL DIAMETER		CIRC. MILS	EQUIVALENT CIRC. MILS	AWG. SIZE	METRIC WIRE SIZE MM	STRANDING/WIRE DIAMETER PER STRAND		APPROXIMATE OVERALL DIAMETER	
				IN.	MM	IN.	MM					IN.	MM	IN.	MM
—	937	—	0.50	1/.032	1/.813	.032	.061	83690	—	1	—	19/.0064	19/1.50	.332	8.43
1020	—	20	—	7/.0121	1/.307	.036	0.91	—	98680	—	50	19/.073	19/1.85	.365	9.27
—	1480	—	.75	1/.039	1/.091	.039	0.99	10500	—	1/0	—	19/.0745	19/1.59	.373	9.46
1620	—	18	—	1/.0103	1/1.02	.040	1.02	133100	—	2/0	—	19/.0837	19/2.13	.419	10.6
1620	—	18	—	7/.0152	7/.386	.046	1.16	—	138100	—	70	19/.086	19/2.18	.430	10.9
—	1974	—	1.0	1/.045	1/1.14	.045	1.14	167800	—	3/0	—	19/.094	19/2.59	.470	11.9
—	1974	—	1.0	7/.017	7/.422	.061	1.30	167800	—	3/0	—	36/.0673	37/1.71	.471	12.0
2580	—	16	—	1/.0503	1/1.29	.051	1.29	—	187500	—	95	19/.101	19/2.57	.505	12.8
2580	—	16	—	7/.0192	7/.468	.058	1.46	—	187500	—	95	37/.072	37/1.83	.504	12.5
—	2960	—	1.5	1/.055	1/1.40	.055	1.40	211600	—	4/0	—	19/.1055	19/2.89	.528	13.4
—	2960	—	1.5	7/.021	7/5.33	.063	1.60	—	237.8 kcmil	—	120	37/.081	37/2.06	.567	14.4
4110	—	14	—	1/.0641	1/1.63	.064	1.63	250 kcmil	—	—	—	37/.0822	37/2.07	.575	14.6
4110	—	14	—	7/.0242	7/.615	.073	1.84	300 kcmil	—	—	150	37/.090	37/2.29	.630	16.0
—	4934	—	2.5	1/.071	1/1.80	.071	1.80	350 kcmil	—	—	—	37/.0973	37/2.47	.681	17.3
—	4934	—	2.5	7/.027	7/6.66	.081	2.06	—	365.1 kcmil	—	185	37/.100	37/2.54	.700	17.8
6530	—	12	—	1/.0308	1/2.05	.081	2.05	400 kcmil	—	—	—	37/104	37/2.64	.728	18.5
6530	—	12	—	7/.0305	7/.775	.092	2.32	—	473.6 kcmil	—	240	37/114	37/2.90	.798	20.3
—	7894	—	4	1/.089	1/2.26	.089	2.26	—	473.6 kcmil	—	240	61/.089	61/2.26	.801	20.3
—	7894	—	4	7/.034	7/.864	.102	2.59	500 kcmil	—	—	—	37/1162	37/2.95	.813	20.7
10380	—	10	—	1/.1019	1/2.59	.102	2.59	500 kcmil	—	—	—	61/.0905	61/2.30	.814	20.7
10380	—	10	—	7/.0355	7/.978	.116	2.93	—	592.1 kcmil	—	300	61/.099	61/2.51	.891	22.6
—	11840	—	6	1/.109	1/2.77	.109	2.77	600 kcmil	—	—	—	61/.0992	61/2.52	.893	22.7
—	11840	—	6	7/.042	7/.107	.126	3.21	700 kcmil	—	—	—	61/.1071	61/2.72	.964	24.5
13000	—	9	—	1/.1144	1/2.91	.114	2.91	750 kcmil	—	—	—	61/1109	61/2.82	.998	25.4
13090	—	9	—	7/.0432	7/1.10	.130	3.30	750 kcmil	—	—	—	91/.0908	91/2.31	.998	25.4
16510	—	8	—	1/.1285	1/3.26	.128	3.25	—	789.4 kcmil	—	400	61/.114	61/2.90	1.026	26.1
16510	—	8	—	7/.0486	7/1.23	.146	3.70	800 kcmil	—	—	—	61/1145	61/2.91	1.031	26.2
—	19740	—	10	1/.141	1/3.58	.141	3.58	800 kcmil	—	—	—	91/.0938	91/2.38	1.032	26.2
—	19740	—	10	7/.054	7/1.37	.162	4.12	1000 kcmil	986.8 kcmil	—	500	61/.1280	61/3.25	1.152	28.3
20520	—	7	—	1/.1443	1/3.67	.144	3.67	1000 kcmil	—	—	—	91/1048	91/2.66	1.153	29.3
20520	—	7	—	7/.0545	7/1.38	.164	4.15	—	1233.7 kcmil	—	625	91/117	91/2.97	1.287	32.7
26240	—	6	—	1/.162	1/4.11	.162	4.11	1250 kcmil	—	—	—	91/1172	91/2.93	1.289	32.7
26240	—	6	—	7/.0612	7/1.55	.184	4.66	1250 kcmil	—	—	—	127/.0992	127/2.52	1.200	32.8
—	31580	—	16	7/.008	7/1.73	.204	5.13	1500 kcmil	—	—	—	91/1284	91/3.26	1.412	36.9
33090	—	5	—	7/.0688	7/1.75	.206	5.24	1500 kcmil	—	—	—	127/.1087	127/2.76	1.413	36.9
41740	—	4	—	7/.0772	7/1.96	.232	5.88	—	1578.8 kcmil	—	800	91/132	91/3.35	1.452	36.9
—	49340	—	25	7/.085	7/2.16	.255	6.48	—	1973.5 kcmil	—	1000	91/147	91/3.73	1.617	41.1
—	49340	—	25	19/.052	10/1.32	.260	6.60	2000 kcmil	—	—	—	127/1255	127/3.19	1.632	41.5
52620	—	3	—	7/.0867	7/2.20	.260	6.61	2000 kcmil	—	—	—	169/1088	169/2.76	1.632	41.5
66300	—	2	—	7/.0974	7/2.47	.292	7.42	—	—	—	—	—	—	—	—
—	69070	—	35	7/.100	7/2.54	.300	7.62	—	—	—	—	—	—	—	—
—	69070	—	35	19/.001	19/1.55	.305	7.75	—	—	—	—	—	—	—	—

INCHES & MILLIMETERS CONVERSION CHART

INCHES	MM	INCHES	MM	MM	INCHES	MM	INCHES		
$\frac{1}{64}$.015625	—	0.397	.1	—	.0039	46	—	1.8110
$\frac{1}{32}$.03125	—	0.794	.2	—	.0079	47	—	1.8504
$\frac{3}{64}$.046875	—	1.191	.3	—	.0118	48	—	1.8898
$\frac{1}{16}$.0625	—	1.588	.4	—	.0157	48	—	1.9291
$\frac{5}{64}$.078125	—	1.984	.5	—	.0197	50	—	1.9685
$\frac{3}{32}$.09375	—	2.381	.6	—	.0236	51	—	2.0079
$\frac{7}{64}$.109375	—	2.778	.7	—	.0276	52	—	2.0472
$\frac{1}{8}$.1250	—	3.175	.8	—	.0315	53	—	2.0866
$\frac{9}{64}$.140625	—	3.572	.9	—	.0354	54	—	2.1260
$\frac{5}{32}$.15625	—	3.969	1	—	.0394	55	—	2.1654
$\frac{11}{64}$.171875	—	4.366	2	—	.0787	56	—	2.2047
$\frac{3}{16}$.1875	—	4.763	3	—	.1181	57	—	2.2441
$\frac{13}{64}$.203125	—	5.159	4	—	.1575	58	—	2.2835
$\frac{7}{32}$.21875	—	5.556	5	—	.1969	59	—	2.3228
$\frac{15}{64}$.234375	—	5.953	6	—	.2362	60	—	2.3622
$\frac{1}{4}$.2500	—	6.350	7	—	.2756	61	—	2.4016
$\frac{17}{64}$.265625	—	6.747	8	—	.3150	62	—	2.4409
$\frac{9}{32}$.28125	—	7.144	9	—	.3543	63	—	2.4803
$\frac{19}{64}$.296875	—	7.541	10	—	.3937	64	—	2.5197
$\frac{5}{16}$.3125	—	7.938	11	—	.4331	65	—	2.5591
$\frac{21}{64}$.328125	—	8.334	12	—	.4724	66	—	2.5984
$\frac{11}{32}$.34375	—	8.731	13	—	.5118	67	—	2.6378
$\frac{23}{64}$.359375	—	9.128	14	—	.5512	68	—	2.6772
$\frac{3}{8}$.3750	—	9.525	15	—	.5906	69	—	2.7165
$\frac{25}{64}$.390625	—	9.922	16	—	.6299	70	—	2.7559
$\frac{13}{32}$.40625	—	10.319	17	—	.6693	71	—	2.7953
$\frac{27}{64}$.421875	—	10.716	18	—	.7087	72	—	2.8346
$\frac{7}{16}$.4375	—	11.113	19	—	.7480	73	—	2.8740
$\frac{29}{64}$.453125	—	11.509	20	—	.7874	74	—	2.9134
$\frac{15}{32}$.46875	—	11.906	21	—	.8268	75	—	2.9528
$\frac{31}{64}$.484375	—	12.303	22	—	.8661	76	—	2.9921
$\frac{1}{2}$.5000	—	12.700	23	—	.9055	77	—	3.0315
				24	—	.9449	78	—	3.0709
				25	—	.9843	79	—	3.1102
				26	—	1.0236	80	—	3.1496
				27	—	1.0630	81	—	3.1890
				28	—	1.1024	82	—	3.2283
				29	—	1.1417	83	—	3.2677
				30	—	1.1811	84	—	3.3071
				31	—	1.2205	85	—	3.3465
				32	—	1.2598	86	—	3.3858
				33	—	1.2992	87	—	3.4252
				34	—	1.3386	88	—	3.4646
				35	—	1.3780	89	—	3.5039
				36	—	1.4173	90	—	3.5433
				37	—	1.4567	91	—	3.5827
				38	—	1.4961	92	—	3.6220
				39	—	1.5354	93	—	3.6614
				40	—	1.5748	94	—	3.7008
				41	—	1.6142	95	—	3.7402
				42	—	1.6535	96	—	3.7795
				43	—	1.6929	97	—	3.8189
				44	—	1.7323	98	—	3.8583
				45	—	1.7717	99	—	3.8976
							100	—	3.9370

TERMINAL STUD SIZE CHART*

STUD SIZE	#0	#1	#2	#3	#4	#5	#6	#8	#10	#12	#14	1/4"	5/16"	3/8"
Stud Diameter	.060	.073	.086	.090	.112	.125	.138	.164	.190	.216	.242	.250	.312	.375
														
Stud Hole	.067	.093	.119			.145	.171	.197	.223	.250	17/64	21/64	25/64	
STUD SIZE	7/16"	1/2"	5/8"	3/4"	7/8"	1"								
Stud Diameter	.437	.500	.625	.750	.875	1.000								
														
Stud Hole	29/64	33/64	21/32	29/32	29/32	1 - 1/32								

* Tolerance .003" on decimal and .005" on fractional dimensions

DIE SET CONVERSION CHART FOR OBSOLETE DIES AND TOOLS

This catalog uses the new, BURNDY® simplified overhead lines die set catalog numbering system, based on Die Index numbers and letters.

The Die Index numbers are marked on the connectors and die sets. Where a die set has more than one Die Index, the catalog number

will generally be the lowest number assigned or all indexes may be marked.

The Die Index numbers and letters in this conversion chart are arranged in numerical or alphabetical order.

To determine the new catalog number for old die sets, cross reference the Die Index on the

connector, or the old die set, with the Die Index shown on the chart. The new die set catalog number or letters appear for each tool in the previous table. **NOTE: Many "A" dies are available. Contact the factory.** The gage column lists quality control inspection gages for the corresponding die index.

DIE INDEX		MECHANICAL TOOLS	HYDRAULIC TOOLS					GAGE NO.
		MD5	Y34A	Y35 & Y35L	Y45L	Y48B	Y486RB	
A	OLD		A8YC	U8YCMT				
	NEW		A-A	U-A				
BG	OLD	MD5-3		U2YLCMT				UG-BG UG-BG-YSU
	NEW	MD5-3		U-BG				
C	OLD	MD5-3	A2YC	U2YCMT				
	NEW	MD5-3	A-C	U-C				
D	OLD		A26AYC	U26AYCT				
	NEW		A-D	U-D				
D3	OLD			U28YPT				
	NEW			U-D3				
E	OLD		A26YC	U26YCT				
	NEW		A-E	U-E				
F	OLD			U28YCT				
	NEW			U-F				
H	OLD			U28AYCT				
	NEW			U-H				
K	OLD	MD5-3						
	NEW	MD5-3						
K-840	OLD							
	NEW			U-K840				
L	OLD			U28YTT				
	NEW			U-L				
M	OLD			U33YTT				
	NEW			U-M				
N	OLD			U33YPCT	S33YPT			
	NEW			U-N	S-N			
O	OLD			U26YPT				
	NEW			U-O				
Q	OLD							
	NEW							
R	OLD			U33RYCT				
	NEW			U-R				
161	OLD	MD5-2	A6CYD	U6CYDMT				
	NEW	MD5-2	A161	U161				
162	OLD	MD5-2	A4CYD	U4CYDMT		C4CYD	F4CYD	UG4C
	NEW	MD5-2	A162	U162		C162	F162	
163 Same as 505	OLD	MD5-2	A2CYD	U2CYDMT		C2CYD	F2CYD	UG2C
	NEW	MD5-2	A163	U163		C163	F163	
164 Same as 275	OLD		A1CYD	U1CYDMT		C1CYD	F1CYD	UG1C
	NEW		A164	U164		C164	F164	

DIE SET CONVERSION CHART (Continued)
FOR OBSOLETE DIES AND TOOLS

DIE INDEX		MECHANICAL TOOLS	HYDRAULIC TOOLS						GAGE NO.
		MD5	Y34A	Y35 & Y35L	Y45L	Y48B	Y486RB	Y60B	
165 Same as 287	OLD		A25YD	U25YDT		C25YD	F25YD	L25YDT	UG25
	NEW		A165	U165		C165	F165	L165	
166 Same as 206	OLD		A26YD	U26YDT		C26YD	F26YD	L26YDT	UG26
	NEW		A166	U166		C166	F166	L166	
167 Same as 207, 211, 256	OLD		A27YD	U27YDT		C27YD	F27YD	L27YDT	UG27
	NEW		A167	U167		C167	F167	L167	
168 Same as 208	OLD		A28YD	U28YDT		C28YD	F28YD	L28YDT	UG28
	NEW		A168	U168		C168	F168	L168	
169	OLD		A29YD	U29YDT		C29YD	F29YD	L29YDT	UG29
	NEW		A169	U169		C169	F169	L169	
170 Same as 306	OLD		A30YD	U30YDT		C30YD	F30YD	L30YDT	UG30
	NEW		A170	U170		C170	F170	L170	
171	OLD	MD5-2	A8WYD	U8WYDMT					
	NEW	D5-2	A171	U171					
192	OLD		A31RYD						
	NEW		A192						
193	OLD		A33RYD	U33RYDT		C33RYD		L33RYDT	
	NEW		A193	U193		C193		L193	
202	OLD		A8KYD	U8KYDMT					
	NEW		A202	U202					
203	OLD		A6KYD	U6KYDMT					
	NEW		A203	U203					
204	OLD		A4KYD	U4KYDT					
	NEW		A204	U204					
205 Same as 339	OLD		A2KYD	U2KYDT					UG2K
	NEW		A205	U205					
206 Same as 166	OLD		A26YD	U26YDT		C26YD	F26YD	L26YDT	UG26
	NEW		A166	U166		C166	F166	L166	
207 Same as 167, 211, 256	OLD		A27YD	U27YDT		C27YD	F27YD	L27YDT	UG27
	NEW		A167	U167		C167	F167	L167	
208 Same as 168	OLD		A28YD	U28YDT		C28YD	F28YD	L28YDT	UG28
	NEW		A168	U168		C168	F168	L168	
209	OLD			U32YDT		C32YD	F32YD	L32YDT	
	NEW			U209		C209	F209	L209	
210	OLD			U34YDT		C34YD	F34YD	L34YDT	UG34
	NEW			U210		C210	F210	L210	
211 Same as 167, 211, 256	OLD		A27YD	U27YDT		C27YD	F27YD	L27YDT	UG27
	NEW		A167	U167		C167	F167	L167	
236	OLD		A4RSYF	U4RSYFT		C4RSYF			UG4RS
	NEW		A236	U236		C236			
237	OLD		A4RYF	U4RYFT		C4RYF			UG4R
	NEW		A237	U237		C237			
238	OLD	MD5-1	A2RSYF	U2RSYFT		C2RSYF			UG2RS
	NEW	MD5-1	A238	U238		C238			
239	OLD		A2RYF	U2RYFT		C2RYF			UG2R
	NEW		A239	U239		C239			
240	OLD		A1RSYF	U1RSYFT		C1RSYF			
	NEW		A240	U240		C240			

DIE SET CONVERSION CHART (Continued)
FOR OBSOLETE DIES AND TOOLS

DIE INDEX		MECHANICAL TOOLS	HYDRAULIC TOOLS					GAGE NO.
		MD5	Y34A	Y35 & Y35L	Y45L	Y48B	Y486RB	
241	OLD		A1RYF	U1RYFT		C1RYF		UG1R
	NEW		A241	U241		C241		
24 Same as 244	OLD		A26RSYF	U26RSYFT		C26RSYF	L26RSYFT	UG26RS
	NEW		A242	U242		C242	L242	
243	OLD		A25RYF	U25RYFT		C25RYF	L25RYFT	UG25R
	NEW		A243	U243		C243	L243	
244 Same as 242	OLD		A26RSYF	U26RSYFT		C26RSYF	L26RSYFT	UG26RS
	NEW		A242	U242		C242	L242	
245	OLD		A26RYF	U26RYFT		C26RYF	L26RYFT	UG26R
	NEW		A245	U245		C245	L245	
246 Same as 248	OLD		A28RSYF	U28RSYFT		C28RSYF	L28RSYFT	UG28RS
	NEW		A248	U248		C248	L248	
247	OLD		A27RYF	U27RYFT		C27RYF	L27RYFT	UG27R
	NEW		A247	U247		C247	L247	
248 Same as 246	OLD		A28RSYF	U28RSYFT		C28RSYF	L28RSYFT	UG28RS
	NEW		A248	U248		C248	L248	
249	OLD		A28RYF	U28RYFT		C28RYF	L28RYFT	UG28R
	NEW		A249	U249		C249	L249	
250	OLD		A30RSYF	U30RSYFT		C30RSYF	F30RSYF L30RSYFT	UG30RS
	NEW		A250	U250		C250	F250 L250	
251	OLD		A30RYF	U30RYFT		C30RYF	F30RYF L30RYFT	UG30R
	NEW		A251	U251		C251	F251 L251	
252	OLD			U32RSYFT		C32RSYF	F32RSYF L32RSYFT	UG32RS
	NEW			U252		C252	F252 L252	
253	OLD			U34RSYFT		C34RSYF	F34RSYF L34RSYFT	UG34RS
	NEW			U253		C253	F253 L253	
254	OLD					C43RSYF	F34RSYF L34RSYFT	
	NEW				S254	C254	F254 L254	
255	OLD			U44RSYFT		C44RSYF	F44RSYF L44RSYFT	
	NEW			U255		C255	F255 L255	
256 Same as 167, 207, 211	OLD		A27YD	U27YDT		C27YD	F27YD L27YDT	UG27
	NEW		A167	U167		C167	F167 L167	
257	OLD		A312HYD	U312HYDT		C312HYD	L312HYDT	
	NEW		A257	U257		C257	L257	
259	OLD			U3K5YDT		C3K5YD		UG3K5
	NEW			U259		C259		
260	OLD					C7K6YD	F7K6YD L7K6YDT	
	NEW					C260	F260 L260	
261 Same as 318	OLD			U37RYFT		C37RYF	F37RYF L37RYFT	UG37R
	NEW			U261		C261	F261 L261	
263	OLD		A26YD-1	U26YDT-1				
	NEW		A263	U263				
267	OLD			U31YDT		C31YD	F31YD L31YDT	UG31
	NEW			U267		C267	F267 L267	
275 Same as 164	OLD		A1CYD	U1CYDMT		C1CYD	F1CYD	UG1C
	NEW		A164	U164		C164	F164	
276	OLD		A6WKYD	U6WKYDT				
	NEW		A276	U276				

DIE SET CONVERSION CHART (Continued)
FOR OBSOLETE DIES AND TOOLS

DIE INDEX		MECHANICAL TOOLS	HYDRAULIC TOOLS						GAGE NO.
		MD5	Y34A	Y35 & Y35L	Y45L	Y48B	Y486RB	Y60B	
285	OLD		A8WKYD	U8WKYDMT					
	NEW		A285	U285					
287 Same as 165	OLD		A25YD	U25YDT		C25YD	F25YD	L25YDT	UG25
	NEW		A165	U165		C165	F165	L165	
292 Same as 578	OLD					C412RYF-1	F412RYF-1	L412RYFT-1	UG412R1
	NEW				S292	C292	F292	L292	
293	OLD					C412RSYF	F412RSYF	L412RSYFT	
	NEW					C293	F293	L293	
294 Same as 293	OLD					C412RSYF	F412RSYF	L412RSYFT	
	NEW				S293	C293	F293	L293	
304	OLD			U375HYDT		C375HYD		L375HYDT	UG375H
	NEW			U304		C304		L304	
305 Same as 341	OLD			U41RSYFT		C41RSYF	F41RSYF	L41RSYFT	
	NEW			U305		C305	F305	L305	
306 Same as 170	OLD		A30YD	U30YDT		C30YD	F30YD	L30YDT	UG30
	NEW		A170	U170		C170	F170	L170	
308	OLD		A3WYD	U3WYDT					
	NEW		A308	U308					
313	OLD			U47RSYFT		C47RSYF	F47RSYF	L47RSYFT	
	NEW			U313		C313	F313	L313	
314 Same as 376	OLD					C48RSYF	F48RSYF	L48RSYFT	
	NEW					C314	F314	L314	
316	OLD			U33RYFT		C33RYF	F33RYF	L33RYFT	UG33R
	NEW			U316		C316	F316	L316	
317 Same as 426	OLD			U35RYFT		C35RYF	F35RYF	L35RYFT	UG35R
	NEW			U317		C317	F317	L317	
318 Same as 261	OLD			U37RYFT		C37RYF	F37RYF	L37RYFT	UG37R
	NEW			U261		C261	F261	L261	
319	OLD					C43RYF	F43RYF	L43RYFT	
	NEW				S319	C319	F319	L319	
320	OLD					C45RSYF	F45RSYF	L45RSYFT	
	NEW				S320	C320	F320	L320	
321	OLD		A301AYD	U301AYDT		C301AYD			UG301A
	NEW		A321	U321		C321			
322	OLD		A30AYD	U30AYDT					
	NEW		A322	U322					
327	OLD			U361RYFT		C361RYF		L361RYFT	UG361R
	NEW			U327		C327		L327	
328	OLD					C7K7YD			
	NEW					C328			
329	OLD		A2FYD	U2FYDT					
	NEW		A329	U329					
331	OLD			U3K6YDT		C3K6YD			
	NEW			U331		C331			
339 Same as 205	OLD		A2KYD	U2KYDT					UG2K
	NEW		A205	U205					
341 Same as 205	OLD			U41RSYFT		C41RSYF	F41RSYF	L41RSYFT	
	NEW			U305		C305	F305	L305	

DIE SET CONVERSION CHART (Continued)
FOR OBSOLETE DIES AND TOOLS

DIE INDEX		MECHANICAL TOOLS	HYDRAULIC TOOLS						GAGE NO.
		MD5	Y34A	Y35 & Y35L	Y45L	Y48B	Y486RB	Y60B	
342	OLD					C391AYD	F391AYD	L391AYDT	UG361A
	NEW				S342	C342	F342	L342	
344	OLD					C7K5YD			
	NEW					C344			
345	OLD					C44YD	F44YD	L44YDT	
	NEW					C345	F345	L345	
350	OLD			U36RSYFT		C36RSYF	F36RSYF	L36RSYFT	UG36RS
	NEW			U350		C350	F350	L350	
352	OLD					C45RYF	F45RYF	L45RYFT	
	NEW				S352	C352	F352	L352	
373	OLD		A25YD-1	U25YDT-1					
	NEW		A373	U373					
376 Same as 314	OLD					C48RSYF	F48RSYF	L48RSYFT	
	NEW					C314	F314	L314	
403	OLD		A1CYD-1	U1CYDT-1					
	NEW		A403	U403					
406	OLD		A26GYD						
	NEW		A406						
419	OLD					C49RSYF	F49RSYF	L49RSYFT	UG49RS
	NEW					C419	F419	L419	
422	OLD						F49RYF	L49RYFT	
	NEW						F422	L422	
426 Same as 317	OLD			U35RYFT		C35RYF		L35RYFT	UG35R
	NEW			U317		C317		L317	
459	OLD		A1CYD-3	U1CYDT-3					
	NEW		A459	U459					
468	OLD		A311AYD	U311AYDT					
	NEW		A468	U468					
469	OLD					C361AYD	F361AYD	L361AYDT	
	NEW				S469	C469	F469	L469	
490 Same as 547	OLD		A321RYF	U321RYFT		C321RYF	F321RYF	L321RYFT	UG321R
	NEW		A490	U490		C490	F490	L490	
495	OLD					C47RYF	R47RYF	L47RYFT	
	NEW					C495	F495	L495	
505 Same as 163	OLD	MD5-2	A2CYD	U2CYDMT		C2CYD	F2CYD	L2CYDT	UG2C
	NEW	MD5-2	A163	U163		C163	F163	L163	
547 Same as 490	OLD		A321RYF	U321YRFT		C321RYF	F321RYF	L321RYFT	UG321R
	NEW		A490	U490		C490	F490	L490	
552	OLD		A26FYD	U26FYDT					
	NEW		A552	U552					
568	OLD		A25FYD	U25FYDT					
	NEW		A568	U568					
575	OLD					C48RYF	F48RYF	L48RYFT	UG48R
	NEW					C575	F575	L575	
576	OLD					C36YD	F36YD	L36YDT	
	NEW					C576	F576	L576	
578 Same as 292	OLD					C412RYF-1	F412RYF-1	L412RYFT-1	UG412R1
	NEW				S292	C292	F292	L292	

DIE SET CONVERSION CHART (Continued)
FOR OBSOLETE DIES AND TOOLS

DIE INDEX		MECHANICAL TOOLS	HYDRAULIC TOOLS						GAGE NO.
		MD5	Y34A	Y35 & Y35L	Y45L	Y48B	Y486RB	Y60B	
579	OLD					C451RYF	F451RYF	L451RYFT	
	NEW					C579	F579	L579	
607	OLD			U281UYDT					
	NEW			U607					
608	OLD			U39RYFT		C39RYF	F39RYF	L39RYFT	
	NEW			U608		C608	F608	L608	
609	OLD		A250EYD	U250EYDT		C250EYD			
	NEW		A609	U609		C609			
614	OLD					C38RYF			
	NEW					C614			
616	OLD		A29AYD						
	NEW		A616						
627	OLD					C39YD	F39YD	L39YDT	
	NEW					C627	F627	L627	
642	OLD			U32LYDT		C32LYD			
	NEW			U642		C642			
643	OLD			U32RLYDT					
	NEW			U643					
648	OLD						F49RYF-1	L49RYFT-1	UG49R
	NEW						F648	L648	
654	OLD		A28RLYR	U28RLYRT				L28RLYRT	
	NEW		A654	U654				L654	
655	OLD			U321RLYRT					
	NEW			U655					
657	OLD					C39LYR			
	NEW					C657			
658	OLD		A27RLYR	U27RLYRT					UG27RL
	NEW		A658	U658					
659	OLD		A26RLYR	U26RLYRT					UG26RL
	NEW		A659	U659					
660	OLD		A25RLYR	U25RLYRT					
	NEW		A660	U660					
667	OLD					C36RLYR-1			
	NEW					C667			
668	OLD			U7M8YRT					
	NEW			U668					
676	OLD			U7M10YRT					
	NEW			U676					
677	OLD			U7M9YRT					UG7M9
	NEW			U677					
678	OLD			U7M7YRT					
	NEW			U678					
679	OLD			U7M6YRT					
	NEW			U679					
684	OLD						F51RYR	L51RYRT	
	NEW						F684	L684	
687	OLD								
	NEW								


DIE SET CONVERSION CHART (Continued)
FOR OBSOLETE DIES AND TOOLS

DIE INDEX		MECHANICAL TOOLS	HYDRAULIC TOOLS					GAGE NO.
		MD5	Y34A	Y35 & Y35L	Y45L	Y48B	Y486RB	
690	OLD			U1SET				
	NEW			U690				
691	OLD			U2SET				
	NEW			U691				
692	OLD			U4SET				
	NEW			U692				
693	OLD			U6AET				
	NEW			U693				
694	OLD			U10AET				
	NEW			U694				
702	OLD							
	NEW							

12-TON U DIES*

BURNDY® Die Sets

Fits Y35, Y39, Y750HS,
PAT750, PAT750XT-18V,
PAT46-18V, Y46
(with PUADP-1 Adapter)

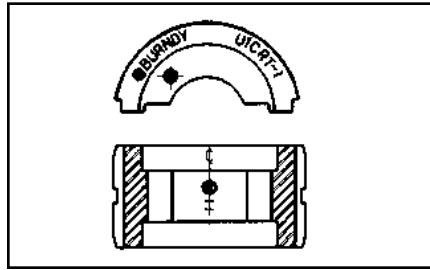

U die case Part# **PT29291**, holds up to 15 dies


	Wire Size	Copper	Aluminum
Small	#8	U8CRT	U8CABT
	#6	U5CRT	U6CABT
	#4	U4CRT	U4CABT
	#3	U3CRT	N/A
	#2	U2CRT	U2CABT
	#1	U1CRT-1	U1CART
	1/0	U25RT	U25ART
	2/0	U26RT	U26ART
	3/0	U27RT	U27ART
	4/0	U28RT	U28ART
Large	250 kcmil	U29RT	U29ART
	300 kcmil	U30RT	U30ART
	350 kcmil	U31RT	U31ART
	400 kcmil	U32RT	U32ART
	500 kcmil	U34RT	U34ART
	535 Flex kcmil	U38XRT	N/A
	600 kcmil	U36RT	U36ART
	750 kcmil	U39RT	U39ART-2
	777 Flex	U44XRT	N/A

* Non-tension U-type 12-ton dies for YA, YS, YA-A, YS-A style connectors.
NOTE: N/A = not applicable.

W DIES

BURNDY® Die Sets

Fits Tools MD6, MD7,
Y500CTHS, PAT600-18V,
PATMD6 Series

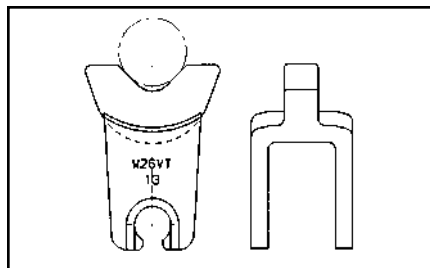

W die case Part# **PT4946**, holds up to 12 dies

	Wire Size	Copper	Aluminum
Small	#8	W8CVT	X8CART
	#6	W5CVT	W161
	#4	W4CVT	W162
	#3	W3CRT	N/A
	#2	W2CVT	W239
	#1	W1CVT	W163
	1/0	W25VT	W241
	2/0	W26VT	W245
	3/0	W27VT	W166
	4/0	W28VT	W660
Large	250	* W29VT	N/A
	300	* W30VT	N/A
	350	* W31VT	* W31ART
	400	* W32VT	N/A
	500	* W34VT	N/A
	600	** W36RT	N/A


* These sizes (250-500) for Y500CT, MD7-34(R), BCT500HS, PAT600-18V only.
** For PAT600-18V only.
NOTE: N/A = not applicable.
Suitable for use on YA, YS, YA-A, YS-A type non-tension connectors.

Throughout the catalog you will notice blue highlighted items. These are the most frequently ordered BURNDY® Products.

PRESENT INSTALLATION TOOL INDEX

This chart provides a cross-reference between die index numbers marked on **BURNDY® COMPRESSION CONNECTORS** and the **CORRESPONDING DIE SETS** used with the various **BURNDY® INSTALLATION TOOLS**. This is the only way to have a BURNDY® compression system.

A die index number has been assigned to each required groove configuration. A prefix letter is used to indicate the specific installation tool for which the die has been designed, as shown below.

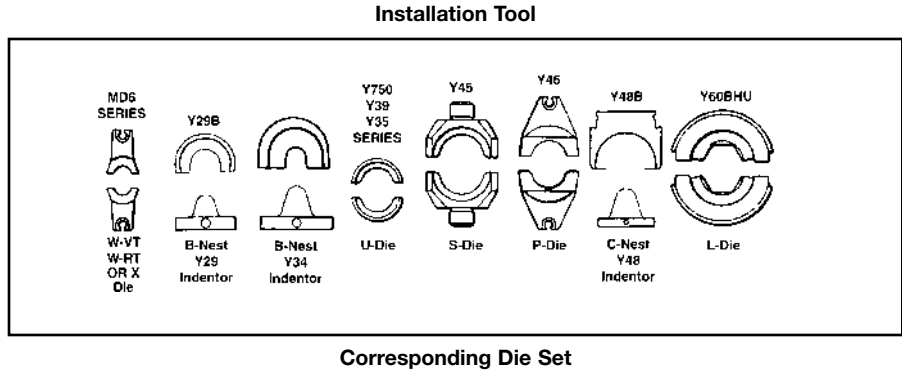

DIE IDENTIFICATION NUMBERING SYSTEM




CHART I			
A - Y34A	E - Y44B	P - Y46	X - OUR840/MD-6
B - Y34BH	F - Y486RB	S - Y45	
C - Y48B	G - Y34C	U - Y35	
	L - Y60B	W - MD-6/OUR840	

CHART II				
12 - #12	4C - #4	26 - 2/0	31 - 350 MCM	OR INDEX
10 - #10	3C - #3	27 - 3/0	32 - 400 MCM	i.e., U312
8C - # 8	2C - #2	28 - 4/0	34 - 500 MCM	312 Die Index
6C - # 6	1C - #1	29 - 250 MCM	36 - 600 MCM	
5C - # 5	25 - 1/0	30 - 300 MCM	39 - 750 MCM	
			44 - 1000 MCM	

CHART III
A - ALUMINUM
B - INDENTOR NEST (USED WITH INDENTOR DIE # Y34P**)
R - ROUND DIE (CIRCUMFERENTIAL)
T - TWIN DIE (BOTH HALVES)

PRESENT INSTALLATION TOOL INDEX

DIE		DIELESS TOOLS		INSTALLATION TOOLING USING DIES												
GROOVE		MECH.	HYDR.	DIE INFORMATION		MECHANICAL			HYDRAULIC							
BURNDY	EEL	MR, MY	Y644	TYPE	COLOR	MD6	OUR840	Y29B ^⑤	Y34B	Y35 ①	Y39	Y750 ①	Y45 ②	Y46 ③	Y48B	Y608HU
A				DIE SET						U-A	U-A	U-A	U-A	U-A		
BG				DIE SET		Perm GR W-BG	X-BG X-NBG			U-BG	U-BG	U-BG	U-BG	U-BG		
C				DIE SET	BROWN	W-C				U-C	U-C	U-C	U-C	U-C		
D				DIE SET						U-D	U-D	U-D	U-D	U-D		
D3				DIE SET	BLUE					U-YFD	U-YFD	U-YFD	U-YFD	U-YFD		
						Perm GR				U-D3	U-D3	U-D3	U-D3	U-D3		
E				DIE SET						U-E	U-E	U-E	U-E	U-E		
F				DIE SET						U-F	U-F	U-F	U-F	U-F		
H				DIE SET						U-H	U-H	U-H	U-H	U-H		
K-1/4				DIE SET		WK14										
K-5/16				DIE SET		WK516				UK516T	UK516T	UK516T	UK516T	UK516T		
K-3/8				DIE SET		WK38				UK38T	UK38T	UK38T	UK38T	UK38T		
K-1/2				DIE SET		WK12										
K-9/16				DIE SET		WK916				UK916T	UK916T	UK916T	UK916T	UK916T		
K-19/32				DIE SET		WK1932										
K-5/8-1				DIE SET						UK581T	UK581T	UK581T	UK581T	UK581T		
K-11/16				DIE SET		WK1116				UK1116T	UK1116T	UK1116T	UK1116T	UK1116T		
K-3/4				DIE SET						UK34T	UK34T	UK34T	UK34T	UK34T		
K-1				DIE SET						UK1T	UK1T	UK1T	UK1T	UK1T		
K-1-5/16				DIE SET						UK1516T	UK1516T	UK1516T	UK1516T	UK1516T		
K-635				DIE SET		WK737				UK737T	UK737T	UK737T	UK737T	UK737T		
K-747				DIE SET		WK747										
K-781				DIE SET		WK781										
K-840				DIE SET		W-K840				U-K840	U-K840	U-K840	U-K840	U-K840		
KB				DIE SET		WKB				UKBT	UKBT	UKBT	UKBT	UKBT		
KBKT				DIE SET						UKBKTT	UKBKTT	UKBKTT	UKBKTT	UKBKTT		
KC				DIE SET						UKCT	UKCT	UKCT	UKCT	UKCT		
KK				DIE SET		WKK										
KR				DIE SET	YELLOW										P-YFR	
														S-KR	P-KR	
KT				DIE SET		WKT										
KU				DIE SET						UKUT	UKUT	UKUT	UKUT	UKUT		
L				DIE SET		W-L				U-L	U-L	U-L	U-L	U-L		
L80				DIE SET	—					U32XRT	U32XRT	U32XRT	U32XRT	U32XRT		
L99				DIE SET	PINK					U38XRT	U38XRT	U38XRT	U38XRT	U38XRT		
L115				DIE SET	YELLOW					U44XRT	U44XRT	U44XRT	U44XRT	U44XRT		
M				DIE SET						U-M	U-M	U-M	U-M	U-M		
N				DIE SET	RED					U-YFN	U-YFN	U-YFN	U-YFN	U-YFN	P-YFN	
										U-N	U-N	U-N	S-N	P-N		
O				DIE SET	GREEN					U-YFO	U-YFO	U-YFO	U-YFO	U-YFO		
						Perm GR W-O				U-O	U-O	U-O	U-O	U-O		
Q				DIE SET		W-Q										

① Cat. No. Y35P3 Adaptor is required to use "Y34PR" type indentors with "U" type nest dies in Y35 and Y750 series tools.
 ② Cat. No. PT6515 Adaptor is required to use "U" type dies in Y45 series tools.

③ Cat. No. PUADP-1 Adaptor is required to use "U" type dies in Y46 series tools.
 ④ The MD6-6R2 ratchet tool is required on these sizes. The standard MD6 or MD6R ratchet tools will not work.
 ⑤ Also pneumatic version Y29NC.

PRESENT INSTALLATION TOOL INDEX (Continued)

DIE		DIELESS TOOLS		INSTALLATION TOOLING USING DIES												
GROOVE		MECH.	HYDR.	DIE INFORMATION		MECHANICAL		HYDRAULIC								
BURNDY	EEI	MR, MY	Y644	TYPE	COLOR	MD6	OUR840	Y29B ⑤	Y34B	Y35 ①	Y39	Y750 ①	Y45 ②	Y46 ③	Y48	Y60BHU
R				DIE SET						U-R	U-R	U-R	U-R	U-R		
T				DIE SET									S-T			
Z				DIE SET									S-Z			
7		MR4C	1 CRIMP	DIE SET	BLUE	W5CRT				U5CRT	U5CRT	U5CRT	U5CRT	U5CRT		
94		MY29-3 MY29-11		NEST INDENTOR				D6CL	B6CD	Y29PR	Y34PR	Y34PR	Y34PR	Y34PR	Y34PR	Y34PR
8		MR4C	1 CRIMP	DIE SET	GRAY	W4CRT	W4CRT			U4CRT	U4CRT	U4CRT	U4CRT	U4CRT		
95		MY29-3 MY29-11		NEST INDENTOR				D4CL	B4CD	Y29PR	Y34PR	Y34PR	Y34PR	Y34PR	Y34PR	Y34PR
9		MY29-3	1 CRIMP	DIE SET	WHITE	W3CRT	W3CRT			U3CRT	U3CRT	U3CRT	U3CRT	U3CRT		
96		MY29-11		NEST INDENTOR				D3CL	B3CD	Y29PR	Y34PR	Y34PR	Y34PR	Y34PR	Y34PR	Y34PR
10		MY29-3	1 CRIMP	DIE SET	BROWN	W2CRT				U2CRT	U2CRT	U2CRT	U2CRT	U2CRT		
97		MY29-11		NEST INDENTOR				D2CL	B2CD	Y29PR	Y34PR	Y34PR	Y34PR	Y34PR	Y34PR	Y34PR
11		MY29-3	1 CRIMP	DIE SET	GREEN	W1CRT				U1CRT	U1CRT	U1CRT	U1CRT	U1CRT		
98		MY29-11		NEST INDENTOR				D1CL	B1CD	Y29PR	Y34PR	Y34PR	Y34PR	Y34PR	Y34PR	Y34PR
12		MY29-3	1 CRIMP	DIE SET	PINK	W25RT	W25RT			U25RT	U25RT	U25RT	U25RT	U25RT		
99		MY29-11		NEST INDENTOR				D25L	B25D	Y29PR	Y34PR	Y34PR	Y34PR	Y34PR	Y34PR	Y34PR
13		MY29-3	1 CRIMP	DIE SET	BLACK	W26RT				U26RT	U26RT	U26RT	U26RT	U26RT		
100		MY29-11		NEST INDENTOR				D26CL	B26D	Y29PR	Y34PR	Y34PR	Y34PR	Y34PR	Y34PR	Y34PR
14		MY29-3	1 CRIMP	DIE SET	ORANGE	W27RT				U27RT	U27RT	U27RT	U27RT	U27RT		
101		MY29-11		NEST INDENTOR				D27L	B27D	Y29PR	Y34PR	Y34PR	Y34PR	Y34PR	Y34PR	Y34PR
15		MY29-3	1 CRIMP	DIE SET	PURPLE	W28RT				U28RT	U28RT	U28RT	U28RT	U28RT	C28R	
		MY29-11		NEST INDENTOR				D28L	B28D	Y29PR	Y34PR	Y34PR	Y34PR	Y34PR	Y34PR	C28D
16		MY29-3	1 CRIMP	DIE SET	YELLOW	W29RT ④				U29RT	U29RT	U29RT	U29RT	U29RT	C29R	
		MY29-11		NEST INDENTOR				D29L	B29D	Y29PR	Y34PR	Y34PR	Y34PR	Y34PR	Y34PR	C29D
17			1 CRIMP	DIE SET	WHITE	W30RT ④				U30RT	U30RT	U30RT	U30RT	U30RT	C30R	L30RT
				NEST INDENTOR					B30D	Y34PR	Y34PR	Y34PR	Y34PR	Y34PR	Y34PR	C30D
18			1 CRIMP	DIE SET	RED	W31RT ④				U31RT	U31RT	U31RT	U31RT	U31RT	C31R	L31RT
				NEST INDENTOR					B31D	Y34PR	Y34PR	Y34PR	Y34PR	Y34PR	Y34PR	C31D
19			1 CRIMP	DIE SET	BLUE	W32RT ④				U32RT	U32RT	U32RT	U32RT	U32RT	C32R	L32RT
				NEST INDENTOR					B32D	Y34PR	Y34PR	Y34PR	Y34PR	Y34PR	Y34PR	C32D
20			1 CRIMP	DIE SET	BROWN	W34RT ④				U34RT	U34RT	U34RT	U34RT	U34RT	C34R	L34RT
				NEST INDENTOR					NO DIE	Y34PR	Y34PR	Y34PR	Y34PR	Y34PR	Y34PR	C34D

① Cat. No. Y35P3 Adapter is required to accommodate "Y34PR" type indentor in Y35, Y39, Y750 HYTOOLS and with the PUADP-1 adapter in the Y46 and with the PT6515 adapter in the Y45.
 ② Cat. No. PT6515 Adapter is required to use "U" type dies in Y45 series tools.
 ③ Cat. No. PUADP-1 Adapter is required to use "U" type dies in Y46 series tools.

④ The MD6-6R2 ratchet tool is required on these sizes. The standard MD6 or MD6R ratchet tools will not work.
 ⑤ Also pneumatic version Y29NC.
 ⑥ Use U11T-1 for YH8C8C.
 ⑦ Hexagonal crimp.
 ⑧ Die 302 recommended for 1.84 O.D. barrel.

PRESENT INSTALLATION TOOL INDEX (Continued)

DIE		DIELESS TOOLS		INSTALLATION TOOLING USING DIES													
GROOVE		MECH.	HYDR.	DIE INFORMATION		MECHANICAL				HYDRAULIC							
BURNDY	EI	MR, MY	Y644	TYPE	COLOR	MD6	OUR840	Y29B ⑤	Y34B	Y35 ①	Y39	Y750 ①	Y45 ②	Y46 ③	Y48	Y60BHU	
21			1 CRIMP	DIE SET	YELLOW						U35RT	U35RT	U35RT	U35RT			
				NEST INDENTOR												C35D	Y48PR
22			1 CRIMP	DIE SET	GREEN						U36RT	U36RT	U36RT	U36RT	C36R	L36RT	
				NEST INDENTOR											P36D	C36D	
23			1 CRIMP	DIE SET	ORANGE											C37R	
				NEST INDENTOR													C37D
24			1 CRIMP	DIE SET	BLACK						U39RT	U39RT	S39RT	P39RT	C39R	L39RT	
				NEST INDENTOR											P39D	C39D	
25			1 CRIMP	DIE SET	ORANGE								S40RT	P40RT	C40R	L40RT	
				NEST INDENTOR											P40D	C40D	
26			1 CRIMP	DIE SET	GOLD												
				NEST INDENTOR													C41D
27			1 CRIMP	DIE SET	WHITE								S44RT	P44RT	C44R	L44RT	
				NEST INDENTOR											P44D	C44D	
28				DIE SET													
				NEST INDENTOR													C443D
29				DIE SET	YELLOW									P45RT	C45R	L45RT	
				NEST INDENTOR													C45D
30				DIE SET	ORANGE												
				NEST INDENTOR													C453D
31				DIE SET	GREEN								S46RT	P46RT	C46R	L46RT	
				NEST INDENTOR												No Nest	C46D
33				DIE SET	GRAY											C47R	L47RT
				NEST INDENTOR													C47D
34				DIE SET	BROWN												L48RT
				NEST INDENTOR													C48D
38		MR4C MR8G98 MR89Q MY28 Y8MRB-1		NEST INDENTOR				DV8L	BV8L	UV8L	UV8L	UV8L	UV8L	UV8L			
39		MR4C MY28		NEST INDENTOR				DV6L	BV6L	UV6L	UV6L	UV6L	UV6L	UV6L			
								Y29PL	Y34PL	Y34PL	Y34PL	Y34PL	Y34PL	Y34PL			
								Y29PL	Y34PLA	Y34PLA	Y34PLA	Y34PLA	Y34PLA	Y34PLA			

① Cat. No. Y35P3 Adapter is required to accommodate "Y34PR" type indenter in Y35, Y39, Y750 HYTOOLS and with the PUADP-1 adapter in the Y46 and with the PT6515 adapter in the Y45.
 ② Cat. No. PT6515 Adapter is required to use "U" type dies in Y45 series tools.

③ Cat. No. PUADP-1 Adapter is required to use "U" type dies in Y46 series tools.
 ⑤ Also pneumatic version Y29NC.

PRESENT INSTALLATION TOOL INDEX (Continued)

DIE		DIELESS TOOLS		INSTALLATION TOOLING USING DIES												
GROOVE		MECH.	HYDR.	DIE INFORMATION		MECHANICAL		HYDRAULIC								
BURNDY	EEI	MR, MY	Y644	TYPE	COLOR	MD6	OUR840	Y29B ⑤	Y34B	Y35 ①	Y39	Y750 ①	Y45 ②	Y46 ③	Y48	Y60BHU
40		MR4C MY28		NEST INDENTOR				DV4L	BV4L	UV4L	UV4L	UV4L	UV4L	UV4L		
								Y29PL	Y34PLA	Y34PLA	Y34PLA	Y34PLA	Y34PLA	Y34PLA		
41		MY28		NEST INDENTOR				DV2L	BV2L	UV2L	UV2L	UV2L	UV2L	UV2L		
								Y29PL	Y34PLA	Y34PLA	Y34PLA	Y34PLA	Y34PLA	Y34PLA		
42		MY28		NEST INDENTOR				DV1L	BV1L	UV1L	UV1L	UV1L	UV1L	UV1L		
								Y29PL	Y34PLA	Y34PLA	Y34PLA	Y34PLA	Y34PLA	Y34PLA		
43		MY28		NEST INDENTOR				DV25L	BV25L	UV25L	UV25L	UV25L	UV25L	UV25L		
								Y29PL	Y34PA	Y34PA	Y34PA	Y34PA	Y34PA	Y34PA		
44		MY28		NEST INDENTOR				DV26L	BV26L	UV26L	UV26L	UV26L	UV26L	UV26L		
								Y29PL	Y34PA	Y34PA	Y34PA	Y34PA	Y34PA	Y34PA		
45		MY28		NEST INDENTOR					BV27L	UV27L	UV27L	UV27L	UV27L	UV27L		
									Y34PA	Y34PA	Y34PA	Y34PA	Y34PA	Y34PA		
46		MY28		NEST INDENTOR					BV28L	UV28L	UV28L	UV28L	UV28L	UV28L		
									Y34PA	Y34PA	Y34PA	Y34PA	Y34PA	Y34PA		
49				DIE SET	RED	W8CRT			*	U8CRT	U8CRT	U8CRT	U8CRT	U8CRT		
161				DIE SET		W161	X-161			U161	U161	U161	U161	U161		
162				DIE SET		W162	W162			U162	U162	U162	U162	U162	C162	
163 505				DIE SET		W163	W163			U163	U163	U163	U163	U163	C163	
164 275				DIE SET		W164				U164	U164	U164	U164	U164	C164	
165 205,287 339				DIE SET		W165	X-165			U165/ U205	U165/ U205	U165/ U205	U165/ U205	U165/ U205	C165	L165
166 206,459				DIE SET		W166				U166/ U459	U166/ U459	U166/ U459	U166/ U459	U166/ U459	C166	L166
167 207,211 256,568				DIE SET		W167				U167/ U568	U167/ U568	U167/ U568	U167/ U568	U167/ U568	C167	L167
168 208				DIE SET						U168	U168	U168	U168	U168	C168	L168
169				DIE SET						U169	U169	U169	U169	U169	C169	L169
170 306				DIE SET						U170	U170	U170	U170	U170	C170	L170
171				DIE SET		W171				U171	U171	U171	U171	U171		
193				DIE SET						U193	U193	U193	U193	U193	C193	L193
202				DIE SET						U202	U202	U202	U202	U202		
203				DIE SET						U203	U203	U203	U203	U203		
204				DIE SET						U204	U204	U204	U204	U204		
205 165,287 339				DIE SET			X-165			U165/ U205	U165/ U205	U165/ U205	U165/ U205	U165/ U205		
206 166 459				DIE SET	W166					U166/ U459	U166/ U459	U166/ U459	U166/ U459	U166/ U459		L166
207 167,211 256,568				DIE SET	W167					U167/ U568	U167/ U568	U167/ U568	U167/ U568	U167/ U568	C167	L167
208 168				DIE SET						U168	U168	U168	U168	U168	C168	L168
209				DIE SET						U209	U209	U209	U209	U209	C209	L209
210				DIE SET						U210	U210	U210	U210	U210	C210	L210

① Cat. No. Y35P3 Adapter is required to accommodate "Y34PR" type indenter in Y35, Y39, Y750 HYTOOLS and with the PUADP-1 adapter in the Y46 and with the PT6515 adapter in the Y45.
 ② Cat. No. PT6515 Adapter is required to use "U" type dies in Y45 series tools.

③ Cat. No. PUADP-1 Adapter is required to use "U" type dies in Y46 series tools.
 ⑤ Also pneumatic version Y29NC.
 * Add Nest (BV8L) & Indentor (Y34PL) for Y34B.

PRESENT INSTALLATION TOOL INDEX (Continued)

DIE		DIELESS TOOLS		INSTALLATION TOOLING USING DIES												
GROOVE		MECH.	HYDR.	DIE INFORMATION		MECHANICAL		HYDRAULIC								
BURNDY	EEL	MR, MY	Y644	TYPE	COLOR	MD6	OUR840	Y29B ⑤	Y34B	Y35 ①	Y39	Y750 ①	Y45 ②	Y46 ③	Y48	Y60BHU
211 167, 211 256, 568				DIE SET		W167				U167/ U568	U167/ U568	U167/ U568	U167/ U568	U167/ U568	C167	L167
236				DIE SET		W236				U236	U236	U236	U236	U236		
237				DIE SET		W237	X-237			U237	U237	U237	U237	U237		
238				DIE SET		W238				U238	U238	U238	U238	U238		
239				DIE SET		W239	X-239			U239	U239	U239	U239	U239		
240				DIE SET	RED	W240				U240	U240	U240	U240	U240		
241				DIE SET		W241	X-241			U241	U241	U241	U241	U241		
242 244	3S/ 4S			DIE SET		W242				U242	U242	U242	U242	U242	C242	L242
243	8A			DIE SET		W243				U243	U243	U243	U243	U243	C243	L243
244 242	3S			DIE SET		W242				U242	U242	U242	U242	U242	C242	L242
245	9A			DIE SET		W245	X-245			U245	U245	U245	U245	U245	C245	L245
246 248	5S			DIE SET		W248				U248	U248	U248	U248	U248	C248	L248
247				DIE SET		W247	X-247			U247	U247	U247	U247	U247	C247	L247
248 246	5S			DIE SET		W248				U248	U248	U248	U248	U248	C248	L248
249	11A			DIE SET		W249	X-249			U249	U249	U249	U249	U249	C249	L249
250				DIE SET						U250	U250	U250	U250	U250	C250	L250
251	12A			DIE SET	RED	W251				U251	U251	U251	U251	U251	C251	L251
252				DIE SET						U252	U252	U252	U252	U252	C252	L252
253				DIE SET						U253	U253	U253	U253	U253	C253	L253
254				DIE SET									S254	P254	C254	L254
255				DIE SET						U255	U255	U255	U255	U255	C255	L255
256 167, 207 211, 568				DIE SET		W167				U167/ U568	U167/ U568	U167/ U568	U167/ U568	U167/ U568	C167	L167
257				DIE SET						U257	U257	U257	U257	U257	C257	L257
259				DIE SET						U259	U259	U259	U259	U259		
260				DIE SET											C260	L260
261 318	15A			DIE SET						U261	U261	U261	U261	U261	C261	L261
263				DIE SET						U263	U263	U263	U263	U263		
267				DIE SET						U267	U267	U267	U267	U267	C267	L267
275 164				DIE SET		W164				U164	U164	U164	U164	U164	C164	
276				DIE SET						U276	U276	U276	U276	U276		
285				DIE SET						U285	U285	U285	U285	U285		
287 165, 205 339				DIE SET		W165				U165/ U205	U165/ U205	U165/ U205	U165/ U205	U165/ U205		L165
292 578				DIE SET									S292	P292	C292	L292
293 294				DIE SET									S293	P293	C293	L293
296		MY29-3	1 CRIMP	DIE SET	TAN					U25ART	U25ART	U25ART	U25ART	U25ART	C25AR	
				NEST INDENTER											P27D	
297		MY29-3	1 CRIMP	DIE SET	OLIVE					U26ART	U26ART	U26ART	U26ART	U26ART	C26AR	
				NEST INDENTER											P29D	

① Cat. No. Y35P3 Adapter is required to accommodate "Y34PR" type indenter in Y35, Y39, Y750 HYTOOLS and with the PUADP-1 adapter in the Y46 and with the PT6515 adapter in the Y45.

② Cat. No. PT6515 Adapter is required to use "U" type dies in Y45 series tools.
 ③ Cat. No. PUADP-1 Adapter is required to use "U" type dies in Y46 series tools.
 ⑤ Also pneumatic version Y29NC.

PRESENT INSTALLATION TOOL INDEX (Continued)

Die		Dieless Tools		Installation Tooling Using Dies												
Groove		Mech.	Hydr.	Die Information		Mechanical				Hydraulic						
BURNDY	EEI	MR, MY	Y644	Type	Color	MD6	OUR840	Y29B ⑤	Y34B	Y35 ①	Y39	Y750 ①	Y45 ②	Y46 ③	Y48	Y60BHU
298		MY29-3	1 Crimp	Die Set	White					U28ART	U28ART	U28ART	U28ART	U28ART	C28AR	L28ART
				Nest Indentor											P31D	
299			1 Crimp	Die Set	Brown					U31ART	U31ART	U31ART	U31ART	U31ART	C31AR	L31ART
				Nest Indentor												P35D
300			1 Crimp	Die Set	Pink					U34ART	U34ART	U34ART	U34ART	U34ART	C34AR	L34ART
				Nest Indentor												
301			1 Crimp	Die Set	Red								S39ART	P39ART	C39AR ⑥	L39ART
				Nest Indentor												
302			1 Crimp	Die Set	Brown								S44ART	P44ART	C44AR	L44ART
				Nest Indentor												
304				Die Set						U304	U304	U304	U304	U304	C304	L304
305 341				Die Set						U305	U305	U305	U305	U305	C305	L305
306 170				Die Set						U170	U170	U170	U170	U170	C170	L170
308				Die Set						U308	U308	U308	U308	U308		
313				Die Set						U313	U313	U313	U313	U313	C313	L313
314 376				Die Set											C314	L314
316				Die Set						U316	U316	U316	U316	U316	C316	L316
317 426				Die Set						U317	U317	U317	U317	U317	C317	L317
318 261				Die Set						U261	U261	U261	U261	U261	C261	L261
319				Die Set									S319	P319	C319	L319
320				Die Set									S320	P320	C320	L320
321				Die Set						U321	U321	U321	U321	U321	C321	L321
322				Die Set						U322	U322	U322	U322	U322		
324			1 Crimp	Die Set	Red					U29ART	U29ART	U29ART	U29ART	U29ART	C29AR	L29ART
				Nest Indentor												
326 538				Die Set						U33RT	U33RT	U33RT	U33RT	U33RT		
327	14A			Die Set						U327	U327	U327	U327	U327	C327	L327
328				Die Set											C328	L328
329				Die Set						U329	U329	U329	U329	U329		
331				Die Set						U331	U331	U331	U331	U331		
339 165, 205 287				Die Set			X-339			U165/ U205	U165/ U205	U165/ U205	U165/ U205	U165/ U205		
341 305				Die Set						U305	U305	U305	U305	U305	C305	L305
342				Die Set									S342	P342	C342	L342
344				Die Set											C344	L344
345				Die Set											C345	L345
346 ⑦			1 Crimp	Die Set	Gray					U6CABT	U6CABT	U6CABT	U6CABT	U6CABT		

① Cat. No. Y35P3 Adapter is required to accommodate "Y34PR" type indentor in Y35, Y39, Y750 HYTOOLS and with the PUADP-1 adapter in the Y46 and with the PT6515 Adapter in the Y45.
 ② Cat. No. PT6515 Adapter is required to use "U" type dies in Y45 series tools.
 ③ Cat. No. PUADP-1 Adapter is required to use "U" type dies in Y46 series tools.

④ The MD6-6R2 ratchet tool is required on these sizes. The standard MD6 or MD6R ratchet tools will not work.
 ⑤ Also pneumatic version Y29NC.
 ⑥ Use C39AR round die 301 for 1.60 O.D. barrel. Use C39AR-2 hex die 936 for 1.46 O.D. barrel.
 ⑦ Hexagonal crimp.
 ⑧ Die 302 recommended for 1.84 O.D. barrel.

PRESENT INSTALLATION TOOL INDEX (Continued)

DIE		DIELESS TOOLS		INSTALLATION TOOLING USING DIES												
GROOVE		MECH.	HYDR.	DIE INFORMATION		MECHANICAL			HYDRAULIC							
BURNDY	EEI	MR, MY	Y644	TYPE	COLOR	MD6	OUR840	Y29B	Y34B	Y35 ①	Y39	Y750 ①	Y45 ②	Y46 ③	Y48	Y60BHU
348		1 CRIMP		DIE SET	PINK					U2CABT	U2CABT	U2CABT	U2CABT	U2CABT		
350				DIE SET						U350	U350	U350	U350	U350	C350	L350
352				DIE SET									S352	P352	C352	L352
373				DIE SET						U373	U373	U373	U373	U373		
374		MY29-3		DIE SET	BLUE					U8CABT	U8CABT	U8CABT	U8CABT	U8CABT		
375		MY29-3	1 CRIMP	DIE SET	GREEN					U4CABT	U4CABT	U4CABT	U4CABT	U4CABT		
376	314			DIE SET											C314	L314
403				DIE SET						U403	U403	U403	U403	U403		
419				DIE SET									S419	P419	C419	L419
422				DIE SET												L422
426	317			DIE SET						U317	U317	U317	U317	U317	U317	
459	166			DIE SET						U166/459	U166/459	U166/459	U166/459	U166/459		
467		MY29-3	1 CRIMP	DIE SET	RUBY					U27ART	A27ART	U27ART	U27ART	U27ART	C27AR	
				NEST INDENTOR										P30D		
468				DIE SET						U468	U468	U468	U468	U468		
469				DIE SET									S469	P469	C469	L469
470			1 CRIMP	DIE SET	BLUE					U30ART	U30ART	U30ART	U30ART	U30ART	C30AR	L30ART
				NEST INDENTOR											P34D	C34D
471		MY29-3	1 CRIMP	DIE SET	GOLD					U1CART	U1CART	U1CART	U1CART	U1CART		
				NEST INDENTOR												
472			1 CRIMP	DIE SET	GREEN					U32ART	U32ART	U32ART	U32ART	U32ART	C32AR	L32ART
				NEST INDENTOR											P35D	C35D
473			1 CRIMP	DIE SET	BLACK					U36ART	U36ART	U36ART	U36ART	U36ART	C36AR	L36ART
				NEST INDENTOR											P44D	C44D
474			1 CRIMP	DIE SET	GOLD								S40ART	P40ART	C40AR	L40ART
				NEST INDENTOR												
478			1 CRIMP	DIE SET	BLUE										C46AR	L46ART
				NEST INDENTOR												
479				DIE SET	RED											L48ART
490	547			DIE SET						U490	U490	U490	U490	U490	C490	L490
495				DIE SET											C495	L495
505	163			DIE SET		W163				U163	U163	U163	U163	U163		L163
511	MY29-3		NEST INDENTOR						B6CD							
									Y34PA							
512	MY29-3		NEST INDENTOR						B4CD							
									Y34PA							
513	MY29-3		NEST INDENTOR						B1CD							
									Y34PA							
514	MY29-3		NEST INDENTOR						B26D							
									Y34PA							

① Cat. No. Y35P3 Adapter is required to accommodate "Y34PR" type indenter in Y35, Y39, Y750 HYTOOLS and with the PUADP-1 adapter in the Y46 and with the PT6515 adapter in the Y45.
 ② Cat. No. PT6515 Adapter is required to use "U" type dies in Y45 series tools.

③ Cat. No. PUADP-1 Adapter is required to use "U" type dies in Y46 series tools.
 ④ The MD6-6R2 ratchet tool is required on these sizes. The standard MD6 or MD6R ratchet tools will not work.
 ⑤ Also pneumatic version Y29NC.
 ⑥ Hexagonal crimp.

PRESENT INSTALLATION TOOL INDEX (Continued)

DIE		DIELESS TOOLS		INSTALLATION TOOLING USING DIES												
GROOVE		MECH.	HYDR.	DIE INFORMATION		MECHANICAL			HYDRAULIC							
BURNDY	EEL	MR, MY	Y644	TYPE	COLOR	MD6	OUR840	Y29B ⑤	Y34B	Y35 ①	Y39	Y750 ①	Y45 ②	Y46 ③	Y48	Y60BHU
515		MY29-3		NEST INDENTOR					B26D							
									Y34PR5							
516		MY29-3		NEST INDENTOR					B27D							
									Y34PR5							
517		MY29-3		NEST INDENTOR					B29D							
									Y34PR5							
518		MY29-3		NEST INDENTOR					B30D							
									Y34PR5							
519		MY29-3		NEST INDENTOR					B31D							
									Y34PR5							
520		MY29-3		NEST INDENTOR					B32D							
									Y34PR5							
521				NEST INDENTOR					No Nest						C34D	
									Y34PR11						Y48PR-1	
522				NEST INDENTOR											C35D	
															Y48PR-1	
523				NEST INDENTOR											C35D	
															Y48PR-1	
524				NEST INDENTOR											C39D	
															Y48PR-1	
525				NEST INDENTOR											C44D	
															Y48PR-1	
526				NEST INDENTOR											C45D	
															Y48PR-1	
527				NEST INDENTOR											C45D	
															Y48PR-1	
528				NEST INDENTOR											C46D	
															Y48PR-1	
529				NEST INDENTOR											C46AD	
															Y48PR-11	
538 326				DIE SET						U33RT	U33RT	U33RT	U33RT	U33RT		
547 490				DIE SET						U490	U490	U490	U490	U490	C490	L490
552				DIE SET						U552	U552	U552	U552	U552		
568 167, 207 211, 256				DIE SET		W167				U167/ U568	U167/ U568	U167/ U568	U167/ U568	U167/ U568		
575				DIE SET											C575	L575
576				DIE SET											C576	L576
578 292				DIE SET								S292	P292		C292	L292
579				DIE SET								S579	P579		C579	L579
587				DIE SET												L47ART
607				DIE SET						U607	U607	U607	U607	U607		
608				DIE SET						U608	U608	U608	U608	U608	C608	L608
609				DIE SET						U609	U609	U609	U609	U609	C609	
627				DIE SET											C627	L627
642				DIE SET						U642	U642	U642	U642	U642	C642	L642
643				DIE SET						U643	U643	U643	U643	U643		
647 ⑤				DIE SET											C45AR	L45ART

① Cat. No. Y35P3 Adapter is required to accommodate "Y34PR" type indenter in Y35, Y39, Y750 HYTOOLS and with the PUADP-1 adapter in the Y46 and with the PT6515 adapter in the Y45.
 ② Cat. No. PT6515 Adapter is required to use "U" type dies in Y45 series tools.

③ Cat. No. PUADP-1 Adapter is required to use "U" type dies in Y46 series tools.
 ④ Also pneumatic version Y29NC.
 ⑤ Die 302 recommended for 1.84 O.D. barrel.

PRESENT INSTALLATION TOOL INDEX (Continued)

Die		Dieless Tools			Installation Tooling Using Dies											
Groove	EEI	Mech.	Hydr.	Die Information		Mechanical				Hydraulic						
		MR, MY	Y644	Type	Color	MD6	OUR840	Y29B ^⑤	Y34B	Y35 ^①	Y39	Y750 ^①	Y45 ^②	Y46 ^③	Y48	Y60BHU
648				Die Set												L648
654				Die Set	Purple					U654	U654	U654	U654	P654		L654
655	13A			Die Set						U655	U655	U655	U655	U655		
658				Die Set						U658	U658	U658	U658	U658		
659				Die Set		W659				U659	U659	U659	U659	U659		
660				Die Set		W660	X-660			U660	U660	U660	U660	U660		
667				Die Set											C667	L667
668				Die Set						U668	U668	U668	U668	U668	C668	
676				Die Set						U676	U676	U676	U676	U676		
677				Die Set						U677	U677	U677	U677	U677		L677
678				Die Set						U678	U678	U678	U678	U678		
679				Die Set						U679	U679	U679	U679	U679		
684				Die Set												L684
687				Die Set		W687	X-687									
690	1S			Die Set		W690				U690	U690	U690	U690	U690		
691	2S			Die Set		W691				U691	U691	U691	U691	U691		
692	4S			Die Set		W692				U692	U692	U692	U692	U692		
693	6A			Die Set		W693				U693	U693	U693	U693	U693		
694	10A			Die Set		W694				U694	U694	U694	U694	U694		
702				Die Set		W702										
705				Die Set						U705	U705	U705	U705	U705		
717 ^⑦				Die Set									S717	P717		L717/L717W
718 ^⑦				Die Set												L718
719 ^⑦				Die Set									S719	P719		L719/L719W
720 ^⑦				Die Set									S720	P720		L720/L720W
721 ^⑦				Die Set												L721
722 ^⑦				Die Set									S722	P722	C722	L722/L722W
723 ^⑦				Die Set											C723	L723
724 ^⑦				Die Set									S724	P724	C724	L724/L724W
725 ^⑦				Die Set									S725	P725	C725	L725/L725W
726 ^⑦				Die Set												L726
727 ^⑦				Die Set												L727/L727W
728 ^⑦				Die Set												L728/L728W
729 ^⑦				Die Set												L729/L729W
735 ^⑦				Die Set												L735/L735W
740 ^⑦				Die Set												L740
786				Die Set						U786	U786	U786	U786	U786		
788				Die Set						U788	U788	U788	U788	U788		
789				Die Set												L789
936 ^⑦			1 Crimp	Die Set	Yellow					U39ART-2	U39ART-2	U39ART-2	U39ART-2	U39ART-2	C39ART-2	L39ART-2
997				Die Set	Orange					U997	U997	U997	U997	U997		
998				Die Set								PU998	S998	P998		
999				Die Set									S999	P999		
1011				Die Set								U1011	S1011	P1011		
1012				Die Set									S1012			
1013		MY29-11		Nest Indentor						UV8L	UV8L	UV8L	UV8L	UV8L		
										Y34PL	Y34PL	Y34PL	Y34PL	Y34PL		

① Cat. No. Y35P3 Adapter is required to accommodate "Y34PR" type indenter in Y35, Y39, Y750 HYTOOLS and with the PUADP-1 adapter in the Y46 and with the PT6515 adapter in the Y45.
 ② Cat. No. PT6515 Adapter is required to use "U" type dies in Y45 series tools.
 ③ Cat. No. PUADP-1 Adapter is required to use "U" type dies in Y46 series tools.

④ The MD6-6R2 ratchet tool is required on these sizes. The standard MD6 or MD6R ratchet tools will not work.
 ⑤ Also pneumatic version Y29NC.
 ⑥ Use C39AR round die 301 for 1.60 O.D. barrel. Use C39AR-2 hex die 936 for 1.46 O.D. barrel.
 ⑦ Hexagonal crimp.

PRESENT INSTALLATION TOOL INDEX (Continued)

Die Groove		Dieless Tools		Installation Tooling Using Dies												
BURNDY	EEI	Mech. MR, MY	Hydr. Y644	Die Information		Mechanical		Hydraulic								
				Type	Color	MD6	OUR840	Y29B ④	Y34B	Y35 ①	Y39	Y750 ①	Y45 ②	Y46 ③	Y48B	Y608HU
1014		MY29-11		Nest Indentor						U6CD1	U6CD1	U6CD1	U6CD1	U6CD1		
										Y34PR	Y34PR	Y34PR	Y34PR	Y34PR		
1015		MY29-11		Nest Indentor						U4CD1	U4CD1	U4CD1	U4CD1	U4CD1		
										Y34PR	Y34PR	Y34PR	Y34PR	Y34PR		
1016		MY29-11		Nest Indentor						U3CD1	U3CD1	U3CD1	U3CD1	U3CD1		
										Y34PR	Y34PR	Y34PR	Y34PR	Y34PR		
1017		MY29-11		Nest Indentor						U2CD1	U2CD1	U2CD1	U2CD1	U2CD1		
										Y34PR	Y34PR	Y34PR	Y34PR	Y34PR		
1018		MY29-11		Nest Indentor						U1CD1	U1CD1	U1CD1	U1CD1	U1CD1		
										Y34PR	Y34PR	Y34PR	Y34PR	Y34PR		
1019		MY29-11		Nest Indentor						U25D1	U25D1	U25D1	U25D1	U25D1		
										Y34PR2	Y34PR2	Y34PR2	Y34PR2	Y34PR2		
1020		MY29-11		Nest Indentor						U26D1	U26D1	U26D1	U26D1	U26D1		
										Y34PR2	Y34PR2	Y34PR2	Y34PR2	Y34PR2		
1021		MY29-11		Nest Indentor						U27D1	U27D1	U27D1	U27D1	U27D1		
										Y34PR2	Y34PR2	Y34PR2	Y34PR2	Y34PR2		
1022		MY29-11		Nest Indentor						U28D1	U28D1	U28D1	U28D1	U28D1		
										Y34PR2	Y34PR2	Y34PR2	Y34PR2	Y34PR2		
1023		MY29-11		Nest Indentor						U29D1	U29D1	U29D1	U29D1	U29D1		
										Y34PR2	Y34PR2	Y34PR2	Y34PR2	Y34PR2		
1024				Nest Indentor						U30D1	U30D1	U30D1	U30D1	U30D1		
										Y34PR2	Y34PR2	Y34PR2	Y34PR2	Y34PR2		
1025				Nest Indentor						U31D1	U31D1	U31D1	U31D1	U31D1		
										Y34PR2	Y34PR2	Y34PR2	Y34PR2	Y34PR2		
1026				Nest Indentor						U32D1	U32D1	U32D1	U32D1	U32D1		
										Y34PR2	Y34PR2	Y34PR2	Y34PR2	Y34PR2		
1027				Nest Indentor						U34D1	U34D1	U34D1	U34D1	U34D1		
										Y34PR2	Y34PR2	Y34PR2	Y34PR2	Y34PR2		
1028				Nest Indentor										P36D	C36D	
														P48PR1	Y48PR1	
1029				Nest Indentor										P38D	C38D	
														P48PR1	Y48PR1	
1030				Nest Indentor										P39D	C39D	
														P48PR1	Y48PR1	
1031				Nest Indentor										P40D	C40D	
														P48PR1	Y48PR1	
1032				Nest Indentor										P44D	C44D	
														P48PR1	Y48PR1	
1102				Die Set	White									P1102		
1103				Die Set	Blue									P1103		
1104				Die Set	Brown							U1104		P1104		
1105												U1105		P1105		
400				Die Set	Purple					U38RT	U38RT	U38RT	U38RT	U38RT		
				Nest Indentor											C38D	
															Y48PR	
2000				Nest Indentor						U27B	U27B	U27B				
										Y34PR15	Y34PR15	Y34PR15				

① Cat. No. Y35P3 Adapter is required to accommodate "Y34PR" type indentor in Y35, Y39, Y750 HYTOOLS and with the PUADP-1 adapter in the Y46 and with the PT6515 adapter in the Y45.

② Cat. No. PT6515 Adapter is required to use "U" type dies in Y45 series tools.

③ Cat. No. PUADP-1 Adapter is required to use "U" type dies in Y46 series tools.

④ Also pneumatic version Y29NC. Available in PIPEAM KIT

**CATALOG NUMBERS
REQUIRING MSDS**

POWERCELL	PENA13-4	PENE 5GAL
P8A	PENA13-8	PENE 55GAL
PENA1/2	PENA13QT	PENHT-4
PENA-4	PENA13GAL	PENHT-8
PENACARTRIDGE	PENA13 5GAL	PENHT-1LB
PENA QT	PENA13 55GAL	PENHT-GAL
PENA GAL	PENE-4	ALFLUID QT
PENA 5GAL	PENE-8	ALFLUID GAL
PENA 55GAL	PENE QT	HYFLUID QT
PENA13CARTRIDGE	PENE GAL	HYFLUID GAL

* All Wejtap catalog numbers ending in PB require MSDS for Power Cell.

**COLOR CODING FOR
OVERHEAD CONNECTORS**

Color Code	Aluminum & Copper			
	Str.	Compact	Sol.	ASCR
Brown	10		8	
Green	8		6	
Blue	5, 6		4	6
Orange	3, 4	#2	2	4
Red	1-19, 2	1/0	1	2
Yellow	1/0	2/0		1/0, 1
Gray	2/0	3/0		2/0
Black	3/0	4/0		3/0
Pink	4/0	266, 300		4/0
Red	250			
White	266			
Blue	300	350	266.8	(26/7, 18/1)
Brown	336			
Green	350, 397, 400			336.4 (26/7, 18/1)
Gray	450			
Pink	500			477 (18/1)
Green	556			
Purple	600			
Yellow				556.5 (24/7, 26/7)
Blue	650			
Red	700			
Yellow	750			
Orange	800			
White	900			
Brown	1000			

COLOR CODING FOR AL/CU CONNECTORS

COLOR CODE	STR	COLOR CODE	STR
BLUE	8	BLUE	300
GRAY	6	BROWN	350
GREEN	4	GREEN	400
PINK	2	PINK	500
GOLD	1	BLACK	600
TAN	1/0	YELLOW	700/750
OLIVE	2/0	RED	700/750
RUBY	3/0	BROWN	1000
WHITE	4/0	BLUE	1500
RED	250	RED	2000

NOTE: This chart is only intended as a guide. For specific applications refer to your catalog.

COLOR CODING FOR COPPER LUGS AND SPLICES

COLOR CODE	CODE SIZE		FLEX CABLE
	STR	SOL	
RED	8	6	8
BLUE	6		6
BLUE	5		
GRAY	4		4
WHITE	3	2	
BROWN	2		2
GREEN	1		1
PINK	1/0		1/0
BLACK	2/0		2/0
ORANGE	3/0		3/0
PURPLE	4/0		4/0
YELLOW	250		4/0 & 250
WHITE	300		250
RED	350		313.1
BLUE	400		373.7
BROWN	500		444.4
GREEN	600		
PINK	700		535.3
PURPLE			600
BLACK	750		646
YELLOW			777.7
ORANGE	800		
WHITE	1000		
YELLOW			1111
GREEN	1500		
BROWN	2000		

NOTE: This chart is only intended as a guide. For specific applications refer to your catalog.

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
1050	157	1165	I60	2051	153	2171	156	3095	I62
1050 ACSS	157	1166	I60	2052	153	2173	156	3097	I62
1051	157	1167	I60	2053	153	2174	156	31 FW BOX	D3
1052	157	1169	I60	2054	153	2179	156	31 NW BOX	D3
1053	157	1170	I60	2055	153	2182	156	31 SW BOX	D3
1054	157	1171	I60	2056	153	2183	156	3103	I63
1055	157	1173	I60	2057	153	2190	156	3112	I63
1056	157	1174	I60	2058	153	2192	156	3113	I63
1057	157	1179	I60	2059	153	2300	156	3114	I63
1058	157	1182	I60	2060	153	2301	156	3117	I63
1059	157	1183	I60	2061	153	25	E62	3118	I63
1060	157	1190	I60	2062	153	25 FW BOX	D3	3120	I63
1061	157	1192	I60	2063	153	25 FWSS	D7	3121	I63
1062	157	122EMT	N96	2064	153	25 HSSN	D7	3123	I63
1063	157	122IMC	N96	2065	153	25 NW BOX	D3	3124	I63
1064	157	122PVC	N96	2066	154	25 SW BOX	D3	3131	I63
1065	157	122RIG	N96	2067	154	25 SWSS LT	D7	3133	I63
1066	158	1300	I60	2070	154	250	E62	3138	I63
1067	158	1301	I60	2071	154	250R	E62	3139	I63
1070	158	145PTAG	F12	2072	154	25C HEN BOX	D3	3140	I63
1071	158, 166	15	E62	2073	154	25CI	E62	3141	I63
1072	158	150	E62	2074	154	25CP	E62	3142	I63
1073	158	150R	E62	2075	154	25R	E62	3143	I63
1074	158	15CI	E62	2076	154	25x100 HEB BOX	D2	3144	I63
1075	158	15CP	E62	2077	154	25x125 HEB BOX	D2	3145	I63
1076	158	15R	E62	2079	154	25x150 HEB BOX	D2	3146	I63
1077	158	1PBS1/0	A54	2080	154	25x200 HEB BOX	D2	3147	I63
1079	158	1PBS2	A54	2083	154	25x250 HEB BOX	D2	3149	I64
1080	158	1PBS250	A54	2084	154	25x300 HEB BOX	D2	3150	I64
1083	158	1PBS350	A54	2085	154	25x50 HEB BOX	D2	3157	I64
1084	158	1PBS500	A54	2086	154	25x62 HEB BOX	D2	3158	I64
1085	158	1PL2/02	A54	2089	154	25x75 HEB BOX	D2	3165	I64
1086	158	1PL2/03	A54	2090	154	3050	I61	3166	I64
1089	158	1PL2502	A54	2093	154	3050 ACSS	I61	3167	I64
1090	158	1PL2503	A54	2094	154	3051	I61	3169	I64
1093	158	1PL3502	A54	2095	154	3052	I61	3170	I64
1094	158	1PL42	A54	2097	154	3053	I61	3171	I64
1095	158	1PL43	A54	2100	154	3054	I61	3173	I64
1097	158	1PL44	A54	2103	154	3055	I61	3174	I64
1100	158	1PL6002	A54	2112	154	3056	I61	3179	I64
1103	158	1PLD2/02	A54	2113	155	3057	I61	3182	I64
1112	158	1PLD2/03	A54	2114	155	3058	I61	3183	I64
1113	158	1PLD2/04	A54	2117	155	3059	I61	3190	I64
1114	158	1PLD2/06	A54	2118	155	3060	I61	3192	I64
1117	159	1PLD2502	A54	2120	155	3061	I61	31C HEN BOX	D3
1118	159	1PLD2503	A54	2121	155	3062	I61	31CHGSN	D5
1120	159	1PLD2504	A54	2123	155	3063	I61	31x100 HEB BOX	D2
1121	159	1PLD2506	A54	2124	155	3064	I61	31x125 HEB BOX	D2
1123	159	1PLD3502	A54	2131	155	3065	I61	31x150 HEB BOX	D2
1124	159	1PLD3503	A54	2133	155	3066	I62	31x175 HEB BOX	D2
1131	159	1PLD3504	A54	2138	155	3067	I62	31x200 HEB BOX	D2
1133	159	1PLD3506	A54	2139	155	3070	I62	31x250 HEB BOX	D2
1138	159	1PLD3508	A54	2140	155	3071	I62	31x300 HEB BOX	D2
1139	159	1PLD43	A54	2141	155	3072	I62	31x50 HEB BOX	D2
1140	159	1PLD44	A54	2142	155	3073	I62	31x62 HEB BOX	D2
1141	159	1PLD6002	A54	2143	155	3074	I62	31x75 HEB BOX	D2
1142	159	1PLD6003	A54	2144	155	3075	I62	32	E62
1143	159	1PLD6004	A54	2145	155	3076	I62	32CI	E62
1144	159	1PLD6005	A54	2146	155	3077	I62	32CP	E62
1145	159	1PLD6006	A54	2147	155	3079	I62	32R	E62
1146	159	1PLD6008	A54	2149	155	3080	I62	3300	I64
1147	159	1PLO2/02	A54	2150	155	3083	I62	3301	I64
1149	159	1PLO2502	A54	2157	156	3084	I62	34NRB	K33
115	E62	1PLO42	A54	2158	156	3085	I62	38 FW BOX	D3
1150	159	1PLO6002	A54	2165	156	3086	I62	38 FWSS	D7
1157	159	200	E62	2166	156	3089	I62	38 HGSN	D5
1158	159	200R	E62	2167	156	3090	I62	38 HGSN-009	D5
115CI	E62	2050	I53	2169	156	3093	I62	38 HSSN	D7
115R	E62	2050 ACSS	I53	2170	156	3094	I62	38 NW BOX	D3

Alpha-Numeric Index

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
38 NWGS	D5	50x125 HEB BOX	D2	5600-1064	I48	62x225 HEB BOX	D6	90R	E62
38 SW BOX	D3	50x150 HAB BOX	D6	5600-1064D	I48	62x225 HEB BOX	D2	9100	I66
38 SWSSMD	D7	50x150 HEB BOX	D2	5600-1066	I48	62x250 HAB BOX	D6	9103	I66
38 X (*) HEB	A22, L20	50x150 HGSB	D5	5600-1066D	I48	62x250 HEB BOX	D2	9112	I66
38C HEN BOX	D3	50x175 HAB BOX	D6	5600-1070	I48	62x275 HEB BOX	D2	9113	I66
38CHEN	A22, L20	50x175 HEB BOX	D2	5600-1070D	I48	62x300 HAB BOX	D6	9114	I66
38SW	A22, L20	50x200 HAB BOX	D6	5600-1072	I48	62x300 HEB BOX	D2	9117	I67
38x100 HEB BOX	D2	50x200 HEB BOX	D2	5600-1074	I48	62x300 HSSB	D7	9118	I67
38x125 HEB BOX	D2	50x200 HGSB	D5	5600-1074D	I48	62x325 HEB BOX	D2	9120	I67
38x125 HGSB	D5	50x200 HSSB	D7	5600-1076	I48	62x350 HAB BOX	D6	9121	I67
38X125 HSSB	D7	50x225 HAB BOX	D6	5600-1076D	I48	62x350 HEB BOX	D2	9123	I67
38x150 HEB BOX	D2	50x225 HEB BOX	D2	5600-1078	I48	62x400 HAB BOX	D6	9124	I67
38x175 HEB BOX	D2	50x250 HAB BOX	D6	5600-1078D	I48	62x400 HEB BOX	D2	9131	I67
38x200 HEB BOX	D2	50x250 HEB BOX	D2	5600-1079	I48	62x450 HAB BOX	D6	9133	I67
38x225 HEB BOX	D2	50x250 HSSB	D7	5600-1079D	I48	62x450 HEB BOX	D2	9138	I67
38x225 HGSB	D5	50x275 HAB BOX	D6	5600-1080	I48	62x500 HAB BOX	D6	9139	I67
38x225 HSSB	D7	50x275 HEB BOX	D2	5600-1080D	I48	62x500 HEB BOX	D2	9140	I67
38x250 HEB BOX	D2	50x300 HAB BOX	D6	5600-1082	I48	62x550 HAB BOX	D6	9141	I67
38x250 HSSB	D7	50x300 HEB BOX	D2	5600-1082D	I48	62x600 HAB BOX	D6	9142	I67
38x275 HEB BOX	D2	50x300 HSSB	D7	5600-2020	I49	62x600 HEB BOX	D2	9143	I67
38x275 HGSB	D5	50x325 HAB BOX	D6	5600-2022	I49	65	E62	9144	I67
38x275 HSSB	D7	50x325 HEB BOX	D2	5600-2026	I49	65CI	E62	9145	I67
38x300 HEB BOX	D2	50x350 HAB BOX	D6	5600-2028	I49	65CP	E62	9146	I67
38x325 HEB BOX	D2	50x350 HEB BOX	D2	5600-2030	I49	65R	E62	9147	I67
38x350 HEB BOX	D2	50x375 HAB BOX	D6	5600-2032	I49	75 NWGS	D5	9149	I67
38x400 HEB BOX	D2	50x375 HEB BOX	D2	5600-2040	I49	75 X (*) HEB	A22, L20	9150	I67
38x450 HEB BOX	D2	50x400 HAB BOX	D6	5600-2042	I49	75CHEN	A22, L20	9157	I67
38x50 HEB BOX	D2	50x400 HEB BOX	D2	5600-2044	I49	75SW	A22, L20	9158	I68
38x500 HEB BOX	D2	50x425 HAB BOX	D6	5600-2050	I49	75x125 HGSB	D5	9165	I68
38x62 HEB BOX	D2	50x450 HAB BOX	D6	5600-2052	I49	90	E62	9166	I68
38x75 BWSS	D7	50x450 HEB BOX	D2	5600-2054	I49	9050	I65	9167	I68
38x75 HEB BOX	D2	50x500 HAB BOX	D6	5600-2056	I49	9050 ACSS	I65	9169	I68
38x81 FWGS	D5	50x500 HEB BOX	D2	5600-2058	I49	9051	I65	9170	I68
38x88 HEB BOX	D2	50x550 HAB BOX	D6	5600-2060	I49	9052	I65	9171	I68
3S	A39	50x550 HEB BOX	D2	5600-2062	I49	9053	I65	9173	I68
3U	A39	50x600 HEB BOX	D2	5600-2064	I49	9054	I65	9174	I68
44 FW BOX	D3	50x75 HEB BOX	D2	5600-2066	I49	9055	I65	9179	I68
44 NW BOX	D3	5600-1020	I47	5600-2070	I49	9056	I65	9182	I68
44 SW BOX	D3	5600-1020D	I47	5600-2072	I49	9057	I65	9183	I68
44C HEN BOX	D3	5600-1022	I47	5600-2074	I49	9058	I65	9190	I68
44x150 HEB BOX	D2	5600-1022D	I47	5600-2076	I49	9059	I65	9192	I68
44x200 HEB BOX	D2	5600-1026	I47	5600-2078	I49	9060	I65	9300	I68
45	E62	5600-1026D	I47	5600-2079	I49	9061	I65	9301	I68
45CI	E62	5600-1028	I47	5600-2080	I49	9062	I65	AGSKIT2	A31
45CP	E62	5600-1028D	I47	5600-2082	I49	9063	I65	AGSKIT250	A31
45R	E62	5600-1030	I47	62 FW BOX	D3	9064	I65	ALFLUID GAL	O41
4S	A39	5600-1030D	I47	62 FWA BOX	D6	9065	I65	ALFLUID QT	O41
4U	A39	5600-1032	I47	62 FWSS	D7	9066	I65	ALFLUID™ GAL.	N74
50 FW BOX	D3	5600-1032D	I47	62 HAN BOX	D6	9067	I66	ALFLUID™ QT.	N74
50 FWA BOX	D6	5600-1040	I47	62 HGSN	D5	9070	I66	AMS-0	A30
50 FWSS	D7	5600-1040D	I47	62 HSSN	D7	9072	I66	AMS-1000	A30
50 HAN BOX	D6	5600-1042	I47	62 NW BOX	D3	9073	I66	AMS-2	A30
50 HGSN	D5	5600-1042D	I47	62 NWGS	D5	9074	I66	AMS-250	A30
50 HSSN	D7	5600-1044	I47	62 SW BOX	D3	9075	I66	AMS-350	A30
50 NW BOX	D3	5600-1044D	I47	62 SWAL BOX	D6	9076	I66	AMS-4/0	A30
50 NWGS	D5	5600-1050	I47	62 SWSSMD	D7	9077	I66	AMS-500	A30
50 SW BOX	D3	5600-1050D	I47	62 X (*) HEB	A22, L20	9079	I66	AMS-750	A30
50 SWAL BOX	D6	5600-1052	I47	62C HEN BOX	D3	9080	I66	ASA1000U	C113
50 SWSSMD	D7	5600-1052D	I47	62CHEN	A22, L20	9083	I66	ASA250U	C113
50 X (*) HEB	A22, L20	5600-1054	I47	62SW	A22, L20	9084	I66	ASA800U	C113
500	E62	5600-1054D	I47	62x100 HEB BOX	D2	9085	I66	AYP1	C119
500R	E62	5600-1056	I47	62x100 HGSB	D5	9086	I66	AYP1/0	C119
50C HEN BOX	D3	5600-1056D	I47	62x125 HEB BOX	D2	9089	I66	AYP2	C119
50CHEN	A22, L20	5600-1058	I48	62x150 HEB BOX	D2	9090	I66	AYP250	C119
50SW	A22, L20	5600-1058D	I48	62x175 HAB BOX	D6	9093	I66	AYP350	C119
50x100 HEB BOX	D2	5600-1060	I47	62x175 HEB BOX	D2	9094	I66	AYP4	C119
50x100 HGSB	D5	5600-1060D	I47	62x175 HGSB	D5	9095	I66	AYP500	C119
50x106 BWSS	D7	5600-1062	I47	62x200 HAB BOX	D6	9097	I66	AYP6	C119
50x106 FWGS	D5	5600-1062D	I47	62x200 HEB BOX	D2	90CI	E62	AYP750	C119

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
AYPO2/0	C119	B-1314	E68	B-1643	E80	B-2483	E77	B-2709	E66
AYPO250	C119	B-1315	E68	B-1644	E80	B-2484	E77	B-2710	E66
AYPO3/0	C119	B-1316	E68	B-1645	E80	B-2486	E77	B-2711	E66
AYPO300	C119	B-1317	E68	B-1646	E80	B-2487	E77	B-2712	E66
AYPO350	C119	B-1318	E68	B-1648	E80	B-2488	E77	B-2713	E66
AYPO4/0	C119	B-1319	E68	B-1649	E80	B-249	E64	B-2714	E66
AYPO400	C119	B-1320	E68	B-1650	E80	B-2490	E77	B-2715	E66
AYPO500	C119	B-1321	E68	B-205	E63	B-2491	E77	B-2716	E66
AYPO600	C119	B-1322	E68	B-206	E63	B-2493	E77	B-2717	E66
AYPO750	C119	B-1323	E68	B-207	E63	B-2494	E77	B-2718	E66
B-106	E90	B-1324	E68	B-208	E63	B-2495	E77	B-2719	E66
B-107	E90	B-1325	E68	B-2084	E73	B-2497	E77	B-2747	E66
B-1208	E68	B-1326	E68	B-209	E63	B-2498	E77	B-2751	E66
B-1212	E73	B-1327	E68	B-210	E63	B-250	E64	B-2752	E66
B-1215	E79	B-1328	E68	B-211	E63	B-2506	E75	B-2753	E66
B-1216	E79	B-1329	E68	B-213	E63	B-2507	E75	B-2754	E66
B-1218	E79	B-1330	E68	B-214	E63	B-2509	E75	B-2755	E66
B-1219	E79	B-1331	E68	B-215	E63	B-251	E64	B-2756	E66
B-1220	E79	B-1332	E68	B-2154	E71	B-2510	E73	B-2757	E66
B-1221	E79	B-1333	E68	B-2155	E71	B-2511	E75	B-2761	E80
B-1222	E79	B-1334	E68	B-2156	E71	B-252	E64	B-2781	E78
B-1223	E79	B-1335	E68	B-2157	E71	B-253	E64	B-280	E64
B-1224	E79	B-1336	E68	B-2158	E71	B-254	E64	B-282	E64
B-1225-H	E79	B-1581	E71	B-2159	E71	B-2540	E78	B-283	E64
B-1226-H	E79	B-1582	E71	B-2160	E71	B-2542	E75	B-284	E64
B-1228-H	E79	B-1583	E71	B-2161	E71	B-255	E64	B-285	E64
B-1270	E67	B-1584	E71	B-2162	E71	B-2558	E73	B-286	E64
B-1271	E67	B-1586	E71	B-2163	E71	B-256	E64	B-287	E64
B-1272	E67	B-1587	E71	B-2164	E71	B-2566	E72	B-288	E64
B-1273	E67	B-1588	E71	B-2165	E71	B-2567	E80	B-289	E64
B-1274	E67	B-1589	E71	B-2189	E78	B-2568	E80	B-290	E64
B-1275	E67	B-1593	E71	B-2199	E75	B-2569	E80	B-291	E64
B-1276	E67	B-1594	E71	B-2200	E75	B-257	E64	B-293	E64
B-1277	E67	B-1595	E71	B-221	E64	B-258	E64	B-294	E64
B-1278	E67	B-1596	E71	B-223	E64	B-2583	E77	B-295	E64
B-1279	E67	B-1597	E71	B-2235	E73	B-2583-S	E77	B-296	E64
B-1280	E67	B-1601	E71	B-224	E64	B-259	E64	B-297	E64
B-1281	E67	B-1602	E71	B-225	E64	B-260	E64	B-298	E64
B-1282	E67	B-1603	E71	B-226	E64	B-261	E64	B-423	E65
B-1283	E67	B-1604	E71	B-227	E64	B-262	E64	B-424	E65
B-1284	E67	B-1605	E71	B-228	E64	B-263	E64	B-425	E65
B-1285	E67	B-1606	E71	B-229	E64	B-264	E64	B-426	E65
B-1286	E67	B-1610	E71	B-230	E64	B-265	E64	B-427	E65
B-1287	E67	B-1611	E71	B-231	E64	B-266	E64	B-428	E65
B-1288	E67	B-1613	E81	B-232	E64	B-267	E64	B-429	E65
B-1289	E67	B-1614	E81	B-2320	E73	B-268	E64	B-430	E65
B-1290	E67	B-1615	E81	B-233	E64	B-2687	E66	B-431	E65
B-1291	E67	B-1616	E81	B-234	E64	B-2689	E66	B-432	E65
B-1292	E67	B-1617	E81	B-235	E64	B-269	E64	B-433	E65
B-1293	E67	B-1618	E81	B-236	E64	B-2690	E66	B-434	E65
B-1294	E67	B-1619	E81	B-237	E64	B-2691	E66	B-435	E65
B-1295	E67	B-1620	E81	B-238	E64	B-2692	E66	B-436	E65
B-1296	E67	B-1626	E79	B-239	E64	B-2693	E66	B-437	E65
B-1297	E67	B-1627	E79	B-240	E64	B-2694	E66	B-438	E65
B-1298	E67	B-1628	E79	B-241	E64	B-2695	E66	B-439	E65
B-1299	E67	B-1629	E79	B-242	E64	B-2696	E66	B-440	E65
B-1300	E67	B-1630	E79	B-243	E64	B-2697	E66	B-441	E65
B-1301	E67	B-1631	E79	B-244	E64	B-2698	E66	B-442	E65
B-1302	E67	B-1632	E79	B-245	E64	B-2699	E66	B-443	E65
B-1303	E67	B-1633	E79	B-2450	E73	B-270	E64	B-444	E65
B-1304	E67	B-1634	E79	B-246	E64	B-2700	E66	B-445	E65
B-1305	E67	B-1635	E80	B-247	E64	B-2701	E66	B-447	E65
B-1306	E67	B-1636	E80	B-2476	E77	B-2702	E66	B-448	E65
B-1307	E67	B-1637	E80	B-2477	E77	B-2703	E66	B-449	E65
B-1308	E67	B-1638	E80	B-2478	E77	B-2704	E66	B-450	E65
B-1309	E67	B-1639	E80	B-248	E64	B-2705	E66	B-451	E65
B-1310	E67	B-1640	E80	B-2480	E77	B-2706	E66	B-452	E65
B-1311	E68	B-1641	E80	B-2480-S	E77	B-2707	E66	B-453	E65
B-1313	E68	B-1642	E80	B-2482	E77	B-2708	E66	B-454	E65

Alpha-Numeric Index

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
B-455	E65	B-5330	E73	B-5629	E68	B-5904	E72	B-7502	E82
B-456	E65	B-5331	E76	B-563	E70	B-591	E77	B-7503	E82
B-457	E65	B-5332	E73	B-5630	E68	B-5910	E80	B-7504	E82
B-458	E65	B-5333	E73	B-5631	E68	B-592	E77	B-7505	E82
B-459	E65	B-5334	E73	B-5632	E68	B-593	E77	B-7506	E82
B-460	E65	B-5335	E73	B-5634	E68	B-5935	E72	B-7507	E82
B-461	E65	B-5336	E73	B-5635	E68	B-594	E77	B-7508	E82
B-462	E65	B-5337	E73	B-5636	E68	B-5940	E72	B-7509	E82
B-463	E65	B-5338	E73	B-5637	E68	B-5943	E68	B-7510	E82
B-464	E65	B-534	E69	B-5638	E68	B-595	E77	B-7511	E82
B-465	E65	B-5340	E68	B-5639	E68	B-596	E77	B-7512	E82
B-466	E65	B-5341	E73	B-564	E70	B-5961	E72	B-7513	E82
B-467	E65	B-5342	E68	B-5640	E73	B-5963	E72	B-7514	E82
B-468	E65	B-535	E69	B-5642	E68	B-5972	E72	B-7515	E82
B-469	E65	B-5351	E73	B-5644	E68	B-598	E77	B-7520	E82
B-470	E65	B-5352	E73	B-5645	E68	B-599	E77	B-7521	E82
B-471	E65	B-5353	E73	B-5652	E68	B-5992	E72	B-7522	E82
B-472	E65	B-5359	E78	B-5659	E68	B-600	E77	B-7523	E82
B-483	E65	B-5361	E78	B-566	E70	B-6002	E73	B-7528	E82
B-485	E65	B-5362	E78	B-5660	E71	B-6003	E72	B-7529	E82
B-486	E65	B-5363	E78	B-5667	E73	B-602	E76	B-7530	E82
B-487	E65	B-537	E70	B-5668	E68	B-6025	E72	B-7531	E82
B-488	E65	B-538	E70	B-567	E70	B-603	E76	B-7588	E83
B-489	E65	B-5380	E72	B-5676	E68	B-604	E76	B-7589	E83
B-490	E65	B-5389	E78	B-5677	E73	B-6046	E68	B-7590	E83
B-491	E65	B-539	E70	B-5679	E68	B-6048	E72	B-7591	E83
B-492	E65	B-5390	E72	B-5680	E68	B-605	E76	B-7592	E83
B-493	E65	B-540	E70	B-5682	E68	B-6051	E73	B-7593	E83
B-495	E69	B-541	E70	B-5684	E68	B-6060	E80	B-7594	E83
B-496	E69	B-5416	E72	B-5686	E68	B-6061	E80	B-7595	E83
B-497	E69	B-5419	E80	B-5688	E68	B-6067	E80	B-7596	E83
B-498	E69	B-542	E70	B-569	E70	B-6072	E80	B-7597	E83
B-499	E69	B-5428	E73	B-5698	E72	B-6114	E75	B-7598	E83
B-500	E69	B-543	E70	B-5699	E72	B-616	E76	B-7599	E83
B-501	E69	B-5432	E66	B-570	E70	B-6165	E72	B-7600	E83
B-502	E69	B-544	E70	B-5702	E73	B-617	E76	B-7601	E83
B-5021	E64	B-545	E70	B-5709	E67	B-618	E76	B-7602	E83
B-503	E69	B-546	E70	B-571	E70	B-619	E76	B-7603	E83
B-504	E69	B-547	E70	B-572	E70	B-620	E76	B-7604	E83
B-505	E69	B-5475	E64	B-5722	E72	B-6208	E73	B-7605	E83
B-506	E69	B-548	E70	B-573	E70	B-621	E76	B-7606	E83
B-5065	E76	B-549	E70	B-5732	E72	B-622	E76	B-7607	E83
B-507	E69	B-550	E70	B-5734	E72	B-624	E76	B-7608	E83
B-508	E69	B-551	E70	B-5738	E72	B-625-H	E76	B-7609	E83
B-509	E69	B-5513	E72	B-574	E70	B-626-H	E76	B-7610	E83
B-510	E69	B-5515	E72	B-5746	E72	B-628	E75	B-7611	E83
B-511	E69	B-5517	E73	B-575	E70	B-629	E75	B-7612	E83
B-513	E69	B-553	E70	B-5767	E73	B-6294	E73	B-7613	E83
B-514	E69	B-555	E70	B-577	E70	B-630	E75	B-7614	E83
B-515	E69	B-5555	E72	B-5777	E72	B-631	E75	B-7615	E83
B-516	E69	B-5556	E72	B-578	E70	B-644	E75	B-7616	E83
B-517	E69	B-556	E70	B-5781	E69	B-645	E75	B-7617	E83
B-518	E69	B-5560	E73	B-579	E70	B-646	E75	B-7618	E83
B-519	E69	B-5561	E72	B-5803	E72	B-647	E75	B-7619	E83
B-520	E69	B-557	E70	B-5804	E72	B-648	E75	B-7620	E84
B-521	E69	B-5573	E73	B-5820	E72	B-649	E75	B-7621	E84
B-523	E69	B-5574	E64	B-5821	E72	B-650	E75	B-7622	E84
B-524	E69	B-558	E70	B-5830	E72	B-652	E75	B-7623	E84
B-525	E69	B-559	E70	B-5833	E72	B-653	E75	B-7624	E84
B-526	E69	B-560	E70	B-585	E77	B-654	E75	B-7625	E84
B-527	E69	B-5604	E73	B-5850	E72	B-6552	E68	B-7626	E84
B-528	E69	B-561	E70	B-5857	E72	B-6630	E71	B-7627	E84
B-529	E69	B-5618	E67	B-586	E77	B-6766	E73	B-7628	E84
B-5294	E72	B-562	E70	B-587	E77	B-6906	E71	B-7629	E84
B-530	E69	B-5623	E63	B-5877	E72	B-7075	E75	B-7630	E84
B-531	E69	B-5624	E63	B-588	E77	B-7146	E75	B-7631	E84
B-532	E70	B-5625	E63	B-588-S	E77	B-7192	E76	B-7632	E84
B-5321	E71	B-5626	E63	B-589	E77	B-7500	E82	B-7633	E84
B-533	E69	B-5627	E68	B-590	E77	B-7501	E82	B-7634	E84

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
B-7635	E84	B-7897	E86	B2D12	E47	BA-204	E94	BA16E10	B15
B-7636	E84	B-7898	E86	B2D12N	E47	BA-205	E94	BA16E10M	B15, N55
B-7637	E84	B-7899	E86	B2E12	E47	BA-207	E94	BA16E14	B15
B-7638	E84	B-7900	E86	B2E12N	E47	BA-208	E94	BA16E14M	B15, N55
B-7639	E84	B-7901	E86	B2F12	E47	BA-209	E94	BA16E38	B15
B-7640	E84	B-7902	E86	B2F12N	E47	BA-211	E94	BA16E38M	B15, N55
B-7641	E84	B-7903	E86	B2G12N	E47	BA-212	E94	BA16E4	B15
B-7642	E84	B-7904	E86	B34E12R	N95	BA-213	E94	BA16E4M	B15, N55
B-7643	E84	B-7905	E86	B370320-01	E62	BA-214	E94	BA16E6	B15
B-7644	E84	B-7906	E86	B370320-02	E62	BA-215	E94	BA16E6M	B15, N55
B-7645	E84	B-7907	E86	B370320-03	E62	BA-240	E94	BA16E8	B15
B-7646	E84	B-7908	E86	B38-0101-00	E93	BA10E10	B15	BA16E8M	B15, N55
B-7647	E84	B-7909	E86	B38-0101-01	E93	BA10E10M	B15, N55	BA16EF10	B39
B-7648	E84	B-7910	E86	B38-0135-00	E92	BA10E14	B15	BA16EF10M	B39, N55
B-7649	E84	B-7911	E86	B38-0135-01	E92	BA10E14M	B15, N55	BA16EF2	B39
B-7650	E84	B-7912	E86	B38-0302-00	E93	BA10E38	B15	BA16EF2M	B39, N55
B-7651	E84	B-7913	E86	B38-0302-02	E93	BA10E38M	B15, N55	BA16EF6	B39
B-7652	E84	B-7914	E86	B38-0303-00	E93	BA10E6	B15	BA16EF6M	B39, N55
B-7653	E84	B-7915	E86	B38-0304-00	E93	BA10E6M	B15, N55	BA16EF8	B39
B-7654	E84	B-7916	E86	B38-0305-00	E93, F4	BA10E8	B15	BA16EF8M	B39, N55
B-7656	E84	B-7917	E86	B38-0306-00	E92-E93	BA10E8M	B15, N55	BA16EL10	B42
B-7657	E84	B-7918	E86	B38-0307-00	E93	BA10EF10	B39	BA16EL10M	B42, N55
B-7658	E84	B-7919	E86	B38-0308-00	E93	BA10EF10M	B39, N55	BA16EL6	B42
B-7659	E84	B-7920	E86	B38-0309-00	E93	BA10EF6	B39	BA16EL6M	B42, N55
B-7708	E85	B-7921	E86	B38-0309-01	E93	BA10EF6M	B39, N55	BA16EL8	B42
B-7709	E85	B-7922	E86	B38-0330-00	E92	BA10EF8	B39	BA16EL8M	B42, N55
B-7710	E85	B-7923	E86	B38-0904-00	E93	BA10EF8M	B39, N55	BA16EZ10	B41
B-7711	E85	B-8011	E73	B38-3662-01	E94	BA10EL10	B42	BA16EZ10M	N55
B-7712	E85	B-8027	E73	B38-3662-02	E94	BA10EL10M	B42, N55	BA16EZ2	B41
B-7713	E85	B-8165	E78	B38-3662-03	E94	BA10EL6	B42	BA16EZ2M	N55
B-7714	E85	B-8214	E73	B38-3662-04	E94	BA10EL6M	B42, N55	BA16EZ6	B41
B-7715	E85	B-8359	E80	B38-3662-05	E94	BA10EL8	B42	BA16EZ6M	N55
B-7716	E85	B-8379	E76	B38-3662-06	E94	BA10EL8M	B42, N55	BA16EZ8	B41
B-7717	E85	B-8402	E69	B38-3922-00	E92-E93	BA10EZ10	B41	BAT14V	N40
B-7718	E85	B-8403	E69	B38-4129-00	E92	BA10EZ6	B41	BAT18V	N34-N38, N41, N59-N61
B-7719	E85	B-8410	E76	B38-4129-05	E92	BA10EZ8	B41	BBB14210A	E57
B-7720	E85	B-8413	E76	B38032900	E82-E86	BA10EZ8M	N55	BBB14224B	E57
B-7721	E85	B-8414	E69	B38406100	E82-E86	BA14E10	B15	BBB14410C	E57
B-7722	E85	B-8415	E69	B38406200	E82-E86	BA14E10M	B15, N55	BBB14410D	E57
B-7723	E85	B-8422	E69	B38406300	E82-E86	BA14E14	B15	BBB14412E	E57
B-7724	E85	B-8423	E76	B3D12	E47	BA14E14M	B15, N55	BBB14412F	E57
B-7725	E85	B-8426	E69	B3D12N	E47	BA14E38	B15	BBB14416G	E57
B-7726	E85	B-8428	E73	B3E12	E47	BA14E4	B15	BBB14416H	E57
B-7727	E85	B-8434	E70	B3E12N	E47	BA14E4M	B15, N55	BBB14420J	E57
B-7728	E85	B-8435	E70	B3F12	E47	BA14E516	B15	BBB412UD	E57
B-7729	E85	B-8441	E70	B3F12N	E47	BA14E516M	B15, N55	BBB424UD	E57
B-7730	E85	B-8442	E70	B3G12	E47	BA14E6	B15	BBBHR19	E57
B-7731	E85	B-8451	E73	B3G12N	E47	BA14E6M	B15, N55	BBBVR36	E57
B-7732	E85	B-8452	E70	B40-0106-27	E91	BA14E8	B15	BC25	H66
B-7733	E85	B-8454	E70	B40-0106-75	E90	BA14E8M	B15, N55	BC28	H66
B-7734	E85	B-8461	E73	B40-0106-76	E91	BA14EF10	B39	BC2C	H66
B-7735	E85	B-8512	E78	B40-0106-77	E91	BA14EF10M	B39, N55	BCC1000CUAL	N62
B-7736	E85	B-8718	E78	B40-0106-78	E91	BA14EF2	B39	BCCBAT12V	N62
B-7737	E85	B-8726	E73	B40-0319-01	E92	BA14EF6	B39	BCCCASE	N62
B-7738	E85	B-8802	E73	B40-0319-03	E92	BA14EF8	B39	BCCCHGR	N62
B-7739	E85	B-8833	E77	B40-3657-00	E90	BA14EF8M	B39, N55	BCH1211	N91-N94
B-7884	E86	B-8882	E68	B40-4431-01	E91	BA14EL10	B42	BCM5	N91-N94
B-7885	E86	B-9021	E77	B404431-00	E91	BA14EL10M	B42, N55	BCT/PATDCCHGR	N34-N38, N40-N41, N59-N61
B-7886	E86	B-9029	E78	B4D12	E47	BA14EL6	B42	BD12	E46
B-7887	E86	B-9233	E77	B4D12N	E47	BA14EL6M	B42, N55	BD12N	E46
B-7888	E86	B-9233-S	E77	B4E12	E47	BA14EL8	B42	BD18	E46
B-7889	E86	B-9253	E80	B4E12N	E47	BA14EL8M	B42, N55	BD18N	E46
B-7890	E86	B106-32	E91	B4F12	E47	BA14EZ10	B41	BD24	E46
B-7891	E86	B106-37	E91	B4F12N	E47	BA14EZ10M	N55	BD24N	E46
B-7892	E86	B106-41	E91	B4G12N	E47	BA14EZ2	B41	BDA-11-2/0-1	A47, A49
B-7893	E86	B107-32	E91	BA-200	E94	BA14EZ6	B41	BDA-11-500	A45, A48
B-7894	E86	B107-37	E91	BA-201	E94	BA14EZ6M	N55	BDA-112-350	A45, A48
B-7895	E86	B12E	N95	BA-202	E94	BA14EZ8	B41		
B-7896	E86	B1E34R	N95	BA-203	E94	BA14EZ8M	N55		

Alpha-Numeric Index

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
BDA-14-2/0-1	A47, A49	BE18	E46	BIBD350-5	A52	BIBS350-8	A51	BK88007	N87
BDA-16-350	A45, A48	BE18N	E46	BIBD350-6	A52	BIBS35010MT	A53	BK88008	N86
BDA-16-500	A45, A48	BE24	E46	BIBD350-8	A52	BIBS35012MT	A53	BK88020	N88, N90
BDA-212-500	A45, A48	BE24N	E46	BIBD35010MT	A53	BIBS3504MT	A53	BKC3540	N91-N94
BDA-22-350	A45, A48	BEB122	N96	BIBD35012MT	A53	BIBS3506MT	A53	BKD1000B	N84, N87-N94
BDA-22-500	A45, A48	BEB122EMT	N96	BIBD3504MT	A53	BIBS3508MT	A53	BKD1250B	N84, N87-N94
BDA-24-500	A45, A48	BEB122PVC	N96	BIBD3506MT	A53	BIBS4-3	A51	BKD1500B	N85, N87-N94
BDA-26-350	A45, A48	BEB122RIG	N96	BIBD3508MT	A53	BIBS4-4	A51	BKD2000B	N85, N87-N94
BDA-26-500	A45, A48	BEBSHOECASE	N96	BIBD4-2	A52	BIBS4-5	A51	BKD2500	N86, N90, N92, N94
BDB-11-2/0-1	A47, A49	BF12	E46	BIBD4-3	A52	BIBS4-6	A51	BKD3000	N86, N90, N92, N94
BDB-11-2/0-2	A47, A49	BF12N	E46	BIBD4-4	A52	BIBS4-8	A51	BKD3500	N86, N92, N94
BDB-11-2/0-3	A47, A49	BF18	E46	BIBD4-5	A52	BIBS600-10	A51	BKD4000	N86, N92, N94
BDB-11-350-1	A47, A49	BF18N	E46	BIBD4-6	A52	BIBS600-12	A51	BKD500B	N84, N87-N94
BDB-11-350-2	A47, A49	BF24	E46	BIBD4-8	A52	BIBS600-14	A51	BKD750B	N84, N87-N94
BDB-11-350-3	A47, A49	BF24N	E46	BIBD600-10	A52	BIBS600-3	A51	BKLP2	N90
BDB-11-500-1	A47-A48	BG12	E46	BIBD600-12	A52	BIBS600-4	A51	BKLP2K1	N90
BDB-11-500-2	A47-A48	BG12N	E46	BIBD600-14	A52	BIBS600-5	A51	BKLP6	N89
BDB-11-500-3	A47-A48	BG18	E46	BIBD600-2	A52	BIBS600-6	A51	BKLP6K1	N89
BDB-112-350-1	A46, A48	BG18N	E46	BIBD600-3	A52	BIBS600-8	A51	BKOF520	N93
BDB-112-350-2	A46, A48	BG24	E46	BIBD600-4	A52	BIBS60010MT	A53	BKOF540	N94
BDB-112-350-3	A46, A48	BG24N	E46	BIBD600-5	A52	BIBS60012MT	A53	BKOH2540	N86
BDB-14-500-1	A46, A49	BGBL-1/0	A15	BIBD600-6	A52	BIBS6004MT	A53	BKOH520A	N91
BDB-14-500-2	A46, A49	BGBL-250	A15	BIBD600-8	A52	BIBS6006MT	A53	BKOH540A	N92
BDB-14-500-3	A46, A49	BGBL-4	A15	BIBD60010MT	A53	BIBS6008MT	A53	BKOM152	N85
BDB-16-2/0-1	A46, A49	BGM3050	E89	BIBD60012MT	A53	BIBS750-10	A51	BKOM50125	N84
BDB-16-2/0-2	A46, A49	BGM3100	E89	BIBD6004MT	A53	BIBS750-12	A51	BKOR14	N88
BDB-16-2/0-3	A46, A49	BGM640044	E89	BIBD6006MT	A53	BIBS750-14	A51	BKOR152	N88
BDB-16-350-1	A46, A48	BGM64006	E89	BIBD6008MT	A53	BIBS750-3	A51	BKOR50	N88
BDB-16-350-2	A46, A48	BGM640066	E89	BIBD750-10	A52	BIBS750-4	A51	BKOR520	N88
BDB-16-350-3	A46, A48	BGM640068	E89	BIBD750-12	A52	BIBS750-6	A51	BKOR75125	N88
BDB-16-500-1	A46, A48	BH864	N91-N94	BIBD750-14	A52	BIBS750-8	A51	BKOS520	N90
BDB-16-500-2	A46, A48	BHA12E	N95	BIBD750-2	A52	BIC-4-350	K79	BKOS5290	N89
BDB-16-500-3	A46, A48	BHA1E34R	N95	BIBD750-3	A52	BIC-4-500	K79	BKOW520	N87
BDB-162-500-1	A46, A49	BHA34E12R	N95	BIBD750-4	A52	BIC-6-350	K79	BKP1000B	N84, N87-N94
BDB-162-500-2	A46, A49	BHSG1100	F12	BIBD750-6	A52	BIC-6-500	K79	BKP1250B	N84, N87-N94
BDB-162-500-3	A46, A49	BIBD2/0-10	A52	BIBD750-8	A52	BIC-8-350	K79	BKP1500B	N85, N87-N94
BDB-212-500-1	A46, A48	BIBD2/0-12	A52	BIBS2/0-10	A51	BIC-8-500	K79	BKP2000B	N85, N87-N94
BDB-212-500-2	A46, A48	BIBD2/0-14	A52	BIBS2/0-12	A51	BIC2-4-750	K79	BKP2500	N86, N90, N92, N94
BDB-212-500-3	A46, A48	BIBD2/0-2	A52	BIBS2/0-14	A51	BIC2-6-750	K79	BKP3000	N86, N90, N92, N94
BDB-22-2/0-1	A47, A49	BIBD2/0-3	A52	BIBS2/0-3	A51	BIC2-8-750	K79	BKP3500	N86, N92, N94
BDB-22-2/0-2	A47, A49	BIBD2/0-4	A52	BIBS2/0-4	A51	BIPC1/0-2	A37	BKP4000	N86, N92, N94
BDB-22-2/0-3	A47, A49	BIBD2/0-5	A52	BIBS2/0-5	A51	BIPC350-350	A37	BKP500B	N84, N87-N94
BDB-22-350-1	A47-A48	BIBD2/0-6	A52	BIBS2/0-6	A51	BIPC350-4/0	A37	BKP750B	N84, N87-N94
BDB-22-350-2	A47-A48	BIBD2/0-8	A52	BIBS2/0-8	A51	BIPC4/0-1/0	A37	BKPR7520	N89-N90
BDB-22-350-3	A47-A48	BIBD2/010MT	A53	BIBS2/010MT	A53	BIPC4/0-6	A37	BKPR7540	N91-N94
BDB-22-500-1	A47-A48	BIBD2/012MT	A53	BIBS2/012MT	A53	BIPC500-4/0	A37	BKPS50	N89-N94
BDB-22-500-2	A47-A48	BIBD2/04MT	A53	BIBS2/04MT	A53	BISR1-DB	A33	BKS752B	N84-N85, N87
BDB-22-500-3	A47-A48	BIBD2/06MT	A53	BIBS2/06MT	A53	BISR1/0	A50	BKSA50	N89-N90
BDB-24-500-1	A46, A48	BIBD2/08MT	A53	BIBS2/08MT	A53	BISR2	A50	BKSB50B	N84, N87
BDB-24-500-2	A46, A48	BIBD250-10	A52	BIBS250-10	A51	BISR250	A50	BKW52	N87
BDB-24-500-3	A46, A48	BIBD250-12	A52	BIBS250-12	A51	BISR250-DB	A33	BMV-BCH-MT	N16
BDB-26-2/0-1	A46, A49	BIBD250-14	A52	BIBS250-14	A51	BISR3/0-DB	A33	BP10PADKIT	N65-N66
BDB-26-2/0-2	A46, A49	BIBD250-2	A52	BIBS250-3	A51	BISR350	A50	BPD-4-350	K79
BDB-26-2/0-3	A46, A49	BIBD250-3	A52	BIBS250-4	A51	BISR4-DB	A33	BPD-4-500	K79
BDB-26-350-1	A46, A48	BIBD250-4	A52	BIBS250-5	A51	BISR500	A50	BPD-6-350	K79
BDB-26-350-2	A46, A48	BIBD250-5	A52	BIBS250-6	A51	BIT2/0	A50	BPD-6-500	K79
BDB-26-350-3	A46, A48	BIBD250-6	A52	BIBS250-8	A51	BIT250	A50	BPD-8-350	K79
BDB-26-500-1	A46, A48	BIBD250-8	A52	BIBS25010MT	A53	BIT350	A50	BPD-8-500	K79
BDB-26-500-2	A46, A48	BIBD25010MT	A53	BIBS25012MT	A53	BIT4	A50	BPD2-4-750	K79
BDB-26-500-3	A46, A48	BIBD25012MT	A53	BIBS2504MT	A53	BIT600	A50	BPD2-6-750	K79
BDB-430-500-1	A48	BIBD2504MT	A53	BIBS2506MT	A53	BIT750	A50	BPD2-8-750	K79
BDBCOVER1	A46	BIBD2506MT	A53	BIBS2508MT	A53	BITO2/0	A50	BPF20	N93-N94
BDBCOVER2	A46	BIBD2508MT	A53	BIBS350-10	A51	BITO250	A50	BPH20	N91-N92
BDBCOVER3	A47	BIBD350-10	A52	BIBS350-12	A51	BITO350	A50	BS-2006	E74
BDC-11-2/0-1	A47, A49	BIBD350-12	A52	BIBS350-14	A51	BITO4	A50	BS-2007	E74
BDC-14-2/0-1	A47, A49	BIBD350-14	A52	BIBS350-3	A51	BITO600	A50	BS-2008	E74
BDT1	E34	BIBD350-2	A52	BIBS350-4	A51	BITO750	A50	BS-2009	E74
BE12	E46	BIBD350-3	A52	BIBS350-5	A51	BK88001	N85	BS-2010	E74
BE12N	E46	BIBD350-4	A52	BIBS350-6	A51	BK88004	N84	BS-2011	E74

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
BS-2012	E74	BWC420MSC	N103	BYNA52R15HT	I37	C-22LH-1	E39	CH5M	G14
BS-2013	E74	BWC43TRC	N106	BYNA52RHT	I37	C-22LH-2	E39	CH6C	G14
BS-2014	E74	BWC43UC	N106	BYNA52RT15ACCC	I50	C-22LH-3	E39	CH6M	G14
BS-2015	E74	BWC46CWD	N101	BYNA52RT15HACCC	I48	C-4	E35	CH7C	G14
BS-2016	E74	BWC46RC	N103	BYNA52RT15HHT	I33-I34	C-4JA	E37	CH7M	G14
BS-2017	E74	BYNA245MRT15ACCC	I50	BYNA52RT15HT	I38	C-4JPT	E35	CH8C	G14
BS-2018	E74	BYNA245MRT15HACCC	I47	BYNA52RTACCC	I50	C-4LH-1	E39	CH8M	G14
BS-2019	E74	BYNA245MRTACCC	I50	BYNA52RTHHT	I38	C-4LH-2	E39	CH9C	G14
BS-2020	E74	BYNA32R15HHT	I31-I32	BYNA56R15HHT	I31-I32	C-4LH-3	E39	CH9M	G14
BS-2021	E74	BYNA32R15HT	I37	BYNA56R15HT	I37	C-5 (Junior)	E35	CKS4	A4
BS-2024	E74	BYNA32RHT	I37	BYNA56RHT	I37	C-6	E38	CL50-1	A15, E27
BS-2025	E74	BYNA32RT15ACCC	I50	BYNA56RT15HHT	I33-I34	C-61	E39	CL50-1TN	A15, E27
BS-2026	E74	BYNA32RT15HACCC	I47	BYNA56RT15HT	I38	C-66	E39	CM2829P	K35
BS-2027	E74	BYNA32RT15HHT	I33-I34	BYNA56RTHHT	I38	C-6D	E38	CM2929P	K35
BS-2028	E74	BYNA32RT15HT	I38	BYNA58R15HHT	I31-I32	C-7	E38	CM29L	K35
BS-2029	E74	BYNA32RTACCC	I50	BYNA58R15HT	I37	C-8	E35	CM3029P	K35
BS-2030	E74	BYNA32RTHHT	I38	BYNA58RHT	I37	C11CSLH12	E40	CM3229P	K35
BS-2031	E74	BYNA34R15HHT	I31-I32	BYNA58RT15HHT	I33-I34	C11HD4/ODB	E37	CM3429P	K35
BS-2032	E74	BYNA34R15HT	I37	BYNA58RT15HT	I38	C11K16D	E36	CM3629P	K35
BS-2033	E74	BYNA34RHT	I37	BYNA58RTHHT	I38	C11K17D	E36	CMB-29P	K35
BS-2034	E74	BYNA34RT15HHT	I33-I34	BYNA590MRT15ACCC	I50	C22HD4/ODB	E37	CMB-29R	K35
BS-2068	E74	BYNA34RT15HT	I38	BYNA590MRT15HACCC	I48	CASEWDIES	C9, N22	CP2525	H12
BS-2069	E74	BYNA34RTHHT	I38	BYNA590MRTACCC	I50	CCD	H24	CP2626	H12
BS-2070	E74	BYNA36R15HHT	I31-I32	BYNA59R15HHT	I31-I32	CCFBG-FR	C106	CP26A26A	H10
BS-2105	E74	BYNA36R15HT	I37	BYNA59R15HT	I37	CCFD-FR	C102, C106	CP27A27A	H10
BS-2106	E74	BYNA36RHT	I37	BYNA59RHT	I37	CCFDX-FR	C106	CP2828	H12
BS-2107	E74	BYNA36RT15ACCC	I50	BYNA59RT15HHT	I33-I34	CCFDXFR	C102	CP28A28A	H10
BS-2108	E74	BYNA36RT15HACCC	I47	BYNA59RT15HT	I38	CCFN-FR	C102, C106	CP2929	H12
BS-2109	E74	BYNA36RT15HHT	I33-I34	BYNA59RTHHT	I38	CCFO-FR	C102, C106	CP29A29A	H10
BS-2110	E74	BYNA36RT15HT	I38	BYNA760MRT15ACCC	I50	CCFR-FR	C102, C106	CP2C2C	H12
BS10	B54	BYNA36RTACCC	I50	BYNA760MRT15HACCC	I48	CCN	H24	CP30A30A	H10
BS14	B54	BYNA36RTHHT	I38	BYNA760MRTACCC	I50	CCNL	H24	CP31A31A	H10
BS16	B54	BYNA39R15HHT	I31-I32	BYNS32RHT	I39	CCO	H24	CP32A32A	H10
BSC2H	N97	BYNA39R15HT	I37	BYNS32RTHHT	I40	CFAD	C125	CP3434	H12
BSC2H1C2DEBP	N97	BYNA39RHT	I37	BYNS34RHT	I39	CFAD-FR	C125	CP34A34A	H10
BSC2H2A1B1FEBP	N97	BYNA39RT15ACCC	I50	BYNS34RTHHT	I40	CFAN	C125	CP37A37A	H10
BSC2H2C1DEBP	N97	BYNA39RT15HACCC	I47	BYNS36RHT	I39	CFAN-FR	C125	CPB10	A43
BSC2H3A2B	N97	BYNA39RT15HHT	I33-I34	BYNS36RTHHT	I40	CFANL	C125	CPB12	A43
BSC2H5A	N97	BYNA39RT15HT	I38	BYNS39RHT	I39	CFANL-FR	C125	CPB14	A43
BSC2H5B	N97	BYNA39RTACCC	I50	BYNS39RTHHT	I40	CFAO	C125	CPB16-5/8	A43
BSC2L	N98	BYNA39RTHHT	I38	BYNS43RHT	I39	CFAO-FR	C125	CPB21-1/4	A43
BSC2L1C2DEBP	N98	BYNA43R15HHT	I31-I32	BYNS43RTHHT	I40	CFAR	C125	CPB6	A43
BSC2L2C1DEBP	N98	BYNA43R15HT	I32, I37	BYNS451RHT	I39	CFAR-FR	C125	CPB8	A43
BSC2L3A2B	N98	BYNA43RHT	I37	BYNS451RTHHT	I40	CFBG-FR	C106	CPT10	A43
BSC2L5A	N98	BYNA43RT15ACCC	I50	BYNS49RHT	I39	CFD-FR	C102, C106	CPT12	A43
BSC2L5B	N98	BYNA43RT15HACCC	I47	BYNS49RTHHT	I40	CFN-FR	C102, C106	CPT16	A43
BSCWS40	N97-N99	BYNA43RT15HHT	I33-I34	BYNS52RHT	I39	CFO-FR	C102, C106	CPT6	A43
BSCWS80	N97-N99	BYNA43RT15HT	I34, I38	BYNS52RTHHT	I40	CFR-FR	C102, C106	CPT8	A43
BURNDY® GROUNDMAX™		BYNA43RTACCC	I50	BYNS56RHT	I39	CH10C	G14	CT120200D	G7
	E87-E88	BYNA43RTHHT	I38	BYNS56RTHHT	I40	CH10M	G14	CT120200D0	G7
BWC00ADP	N104	BYNA451R15HHT	I31-I32	BYNS58RHT	I39	CH11C	G14	CT120200L	G7
BWC00JS	N105	BYNA451R15HT	I37	BYNS58RTHHT	I40	CH11M	G14	CT120200L0	G7
BWC01CDC	N100	BYNA451RHT	I37	BYNS59RHT	I39	CH12C	G14	CT120300D	G7
BWC01CMC	N100	BYNA451RT15ACCC	I50	BYNS59RTHHT	I40	CH12M	G14	CT120300D0	G7
BWC01FAR	N102	BYNA451RT15HACCC	I47	C-11B	E35	CH14C	G14	CT120300L	G7
BWC01FCMR	N101	BYNA451RT15HHT	I33-I34	C-11CSH-1	E40	CH14M	G14	CT120300L0	G7
BWC01FFMC	N102	BYNA451RT15HT	I38	C-11CSH-2	E40	CH16C	G14	CT120400D	G5, G7
BWC01FSMC	N102	BYNA451RTACCC	I50	C-11CSH-3	E40	CH16M	G14	CT120400D0	G7
BWC04EHC	N100	BYNA451RTHHT	I38	C-11D	E35	CH18C	G14	CT120400D00	G5
BWC06FHC	N100	BYNA49R15HHT	I31-I32	C-11JA	E37	CH18M	G14	CT120400L	G5, G7
BWC20PRSF	N105	BYNA49R15HT	I37	C-11JPT	E35	CH24C	G14	CT120400L0	G7
BWC24HTC	N104	BYNA49RHT	I37	C-11LH-1	E39	CH24L	G14	CT120400L00	G5
BWC24MTHTC	N104	BYNA49RT15ACCC	I50	C-11LH-2	E39	CH2C	G14	CT120400LOUG	G8
BWC25LHTC	N104	BYNA49RT15HACCC	I48	C-11LH-3	E39	CH2M	G14	CT120400LUG	G8
BWC27LHTCADP	N104	BYNA49RT15HHT	I33-I34	C-11N	E35	CH3C	G14	CT120400MH14D0	G10
BWC28FAC	N101	BYNA49RT15HT	I38	C-22	E35	CH3M	G14	CT120400MH14L	G10
BWC32DCC	N105	BYNA49RTACCC	I50	C-22D	E35	CH4C	G14	CT120400MH14L0	G10
BWC40PC	N106	BYNA49RTHHT	I38	C-22JA	E37	CH4M	G14	CT120900D	G5
BWC41ORC	N103	BYNA52R15HHT	I31-I32	C-22JPT	E35	CH5C	G14	CT120900D00	G5

Alpha-Numeric Index

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
CT120900L	G5, G7	CT40200M	G6	CTB125RA4D	G13	ES25A2W	H43	FQN14F25X03B	B47
CT120900LO	G7	CT40200M0	G6	CTB125RA4L	G13	ES25A4W	H43	FQN14F25X03D	B47
CT120900L00	G5	CT40200RC	G9	CTB125S2C	G13	ES25R25R	H43	FQN14M25X03B	B47
CT1751100Q	G7	CT40200RC0	G9	CTB125S4C	G13	ES25R2R	H43	FQN14M25X03D	B47
CT1751100Q0	G7	CT40300C	G6	CTB150AA4C	G13	ES25R2W	H43	FQN18F25X03B	B47
CT1751400Q	G7	CT40300C0	G6	CTB150RA4B	G13	ES25R4W	H43	FQN18F25X03D	B47
CT1751400Q0	G7	CT40300M	G6	CTB150RA4C	G13	ES25R6W	H43	FQN18M25X03B	B47
CT175400Q	G5, G7	CT40300M0	G6	CTB150S4B	G13	ES2R2R	H43	FQN18M25X03D	B47
CT175400Q0	G7	CT40400C	G6	CTH120400L	G11	ES2R2W	H43	FT3B4/0	A39
CT175600Q	G5, G7	CT40400C0	G6	CTH18075C	G11	ES2R4W	H43	FT3B500	A39
CT175600Q0	G7	CT40400M	G6	CTH18075M	G11	ES2R6W	H43	FT4B4/0	A39
CT175600Q00	G5	CT40400M0	G6	CTH30200C	G11	ES2R8W	H43	FT4B500	A39
CT175900Q	G5, G7	CT50137EPRC	G9	CTH50175C	G11	ES2W2W	H43	GA25H26	E54
CT175900Q0	G7	CT50137EPRC0	G9	CTH50175M	G11	ES2W4W	H43	GAR1126	E28
CT175900Q00	G5	CT50137RC	G9	CTSS1001000C	G15	ES2W6W	H43	GAR1129	E28
CT18075C	G5-G6	CT50137RC0	G9	CTSS100200C	G15	ES2W8W	H43	GAR114C	E28
CT18075C0	G6	CT50175C	G5-G6	CTSS100400C	G15	ES4W4W	H43	GAR1426	E28
CT18075C00	G5	CT50175C0	G6	CTSS100600C	G15	ES4W6W	H43	GAR1429	E28
CT18075C0UG	G8	CT50175C00	G5	CTSS100800C	G15	ES4W8W	H43	GAR1434	E28
CT18075CUG	G8	CT50175C0UG	G8	CTSS250200L	G15	ES6W6W	H43	GAR144C	E28
CT18075FLC	G10	CT50175CUG	G8	CTSS250400L	G15	ES6W8W	H43	GAR1526	E28
CT18075IDC	G5, G10	CT50175ID2L	G5, G10	CTSS250600L	G15	ES8W8W	H43	GAR1529	E28
CT18075M	G5-G6	CT50175ID3L	G5, G10	CTSS250800L	G15	F22A28	K78	GAR1534	E28
CT18075M0	G6	CT50175IDC	G5, G10	CTZ120400D	G11	FCB63-2NP300	A35, L17	GAR154C	E28
CT18075M00	G5	CT50175M	G5-G6	CTZ120400L	G11	FCB63-4N	A35, L17	GAR1626	E28
CT18075MH4C	G10	CT50175M0	G6	CTZ18075C	G11	FCB63-6N	A35, L17	GAR1629	E28
CT18075MH4C0	G10	CT50175M00	G5	CTZ30200C	G11	FCB64-44NP50	A35, L17	GAR1634	E28
CT18075MH4M	G10	CT50175M0UG	G8	CTZ50175C	G11	FCB64-4N	A35, L17	GAR164C	E28
CT18125C	G6	CT50175MH10C	G10	CUSA442NTC	C113	FCB64-6N	A35, L17	GAR1726	E28
CT18125C0	G6	CT50175MH10C0	G10	CUSA442TC38	C113	FCB65-4N	A35, L17	GAR1729	E28
CT18125M	G6	CT50175MH10CUG	G8	CUW26RE-1	H68	FD64C5T16	L16	GAR1734	E28
CT18125M0	G6	CT50175MH10M	G10	CUW30A-E	H68	FD655C6	L16	GAR174C	E28
CT18200C	G6	CT50175MH10M0	G10	CUW32R-E	H68	FD655D6	L16	GAR1826	E28
CT18200C0	G6	CT50175MUG	G8	CUW34-E	H67	FD65C6T14	L16	GAR1829	E28
CT18200M	G6	CT50250EPRC	G9	CUW361R-E	H68	FD66C6	L16	GAR1834	E28
CT18200M0	G6	CT50250EPRC0	G9	CUW391A-E	H68	FD66D6	L16	GAR184C	E28
CT18200MUG	G8	CT50300C	G5-G6	CUW44-E	H67	FD675C8	L16	GAR1926	E28
CT2501000Q	G7	CT50300C0	G6	CZ-11	E36	FD675D8	L16	GAR1929	E28
CT2501000Q0	G7	CT50300C00	G5	DUW28	H67	FD67C6	L16	GAR1934	E28
CT2501000RQ	G9	CT50300C0UG	G8	DUW28A	H68	FD67D8	L16	GAR194C	E28
CT2501000RQ0	G9	CT50300CUG	G8	DUW31	H67	FD685C8	L16	GAR2026	E29
CT2501200Q	G7	CT50300M	G5-G6	DUW34	H67	FD685D12	L16	GAR2029	E29
CT2501200Q0	G7	CT50300M0	G6	DUW44	H67	FD685D8	L16	GAR2034	E29
CT2501200RQ0	G9	CT50300M00	G5	DUW44A	H68	FD68C8	L16	GAR204C	E29
CT250200RQ	G9	CT50300M0UG	G8	DUW44A-E	H68	FD68D12	L16	GAR2126	E29
CT250200RQ0	G9	CT50300MUG	G8	E2C34G1	A20, H38, L18	FD68D8	L16	GAR2129	E29
CT250500RQ	G9	CT50400C	G5-G6	E3C34G1	A20, H38, L18	FD69C8	L16	GAR2134	E29
CT250500RQ0	G9	CT50400C0	G6	E4C34G1	A20, H38, L18	FD69D12	L16	GAR214C	E29
CT250600Q	G7	CT50400C00	G5	EA25	A14	FD69D8	L16	GAR2226	E29
CT250600Q0	G7	CT50400C0UG	G8	EA28	A14	FD70D12	L16	GAR2229	E29
CT250600RQ	G9	CT50400CUG	G8	EA28-2N	A14	FD70D16	L16	GAR2234	E29
CT250600RQ0	G9	CT50400IDC	G5, G10	EA2C	A14	FL1025X03D	B48	GAR224C	E29
CT250800Q	G7	CT50400M	G5-G6	EA34	A14	FL1425X03B	B48	GAR2426	E29
CT250800Q0	G7	CT50400M0	G6	EA34-2N	A14	FL1425X03D	B48	GAR2429	E29
CT250800RQ	G9	CT50400M00	G5	EBP	N97-N98	FL1825X03B	B48	GAR2434	E29
CT250800RQ0	G9	CT50400MH10C	G10	EP10	N70	FL1825X03D	B48	GAR244C	E29
CT30125C	G5-G6	CT50400MH10C0	G10	EP10-1HP	N71	FN62T16	L21	GAR3902	E30
CT30125C0	G6	CT50400MH10M0	G10	EP10-1HP-2	N71	FN63T13	L21	GAR3902-BU	E30
CT30125C00	G5	CT50400RC	G9	EP10-2	N70	FN64T16	L21	GAR3902TC	E31
CT30125C0UG	G8	CT50400RC0	G9	EP6	N70	FN65T12	L21	GAR3903	E30
CT30125CUG	G8	CTASST	G16	EP8	N70	FN66T14	L21	GAR3903-BU	E30
CT30125M	G5-G6	CTB075AA4C	G13	EPAC-6	N69	FN67T12	L21	GAR3903TC	E31
CT30125M0	G6	CTB075RA4C	G13	EPAC-8	N69	FP-10	N66	GAR3904	E30
CT30125M00	G5	CTB075RA4M	G13	EPAC10	N69	FP-6	N66	GAR3904-BU	E30
CT30125MH8C	G10	CTB075S4C	G13	EPP10	N68	FP-8	N66	GAR3904TC	E31
CT30125MH8C0	G10	CTB125AA4C	G13	EPP6	N68	FQN10F25X03B	B47	GAR3905	E30
CT40200C	G6	CTB125RA2C	G13	EPPCASE-1	N68	FQN10F25X03D	B47	GAR3905-BU	E30
CT40200C0	G6	CTB125RA4C	G13	EQC632C	E26, H39	FQN10M25X03B	B47	GAR3905TC	E31
CT40200CUG	G8	CTB125RA4CUG	G8	ES25A25A	H43	FQN10M25X03D	B47	GAR3906	E30

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
GAR3906-BU	E30	GD2234	E32	GP1726RT	E56	HFBW42T10CG1	L19	HS_34FR250	F11
GAR3906TC	E31	GD224C	E32	GP1826	E33	HFBW43T10CG1	L19	HS_34T300PF	F7
GAR3907	E30	GG15-1	E42	GP184C	E33	HFBW44T17CG1	L19	HS_34T48PF	F6
GAR3907-BU	E30	GG16-1	E42	GP2026	E33	HFBW64T17CG1	L19	HS_38FR	F11
GAR3907TC	E31	GG17-1	E42	GP2226	E33	HFBW66T16CG1	L19	HS_38FR250	F11
GAR3908	E30	GG17-15	E42	GP6426	E33	HFBW86T20CG1	L19	HS_38T300PF	F7
GAR3908-BU	E30	GG18-1	E42	GP6429	E33	HH5-RL48	N28	HS_38T48PF	F6
GAR3908TC	E31	GG18-15	E42	GP6434	E33	HHS-O/C-B11	N81	HSB100T6PF7	F5
GAR3909	E30	GG18-2	E42	GP644C	E33	HHS-O/C-B13	N81	HSB110H48PF5	F8
GAR3909-BU	E30	GG19-2	E42	GP64526G1	E56	HHS-O/C-B16	N81	HSB110H6PF5	F8
GAR3909TC	E31	GG19-25	E42	GP654CG1	E56	HHS-O/C-B20	N81	HSB110H9PF5	F8
GAR6426	E28	GG20-2	E42	GQ26-1	E43	HIW-716R1	N76	HSB11612T6PF14	F5
GAR6429	E28	GG20-25	E42	GQ2626	E43	HIW12SOCSET	N83	HSB116T6PF26	F5
GAR6434	E28	GG20-3	E42	GQ29-1	E43	HIW71612TGKIT	N76, N83	HSB12T6PF10	F5
GAR644C	E28	GG21-2	E42	GQ2929	E43	HIW716ENF	N75	HSB14T6PF14	F5
GAR644C-RB	E30	GG21-25	E42	GRC12	E45	HIW716ENFTG	N75	HSB150H12PF3	F8
GAR8629	E29	GG21-3	E42	GRC34	E45	HIW716ENFTGKIT	N75	HSB150H48PF5	F8
GB26	E48	GG21-35	E42	GRC58	E45	HIW716VTR1	N76	HSB150H9PF3	F8
GB29	E48	GG22-2	E42	GRF4C-3	E55	HOSE2	N79	HSB18T6PF20	F5
GB34	E48	GG22-25	E42	GRF4C-4	E55	HOSE325	N79	HSB200H12PF2	F8
GB4C	E48	GG22-3	E42	GRL3	E45	HOSE350	N79	HSB200H48PF2	F8
GBL30	E48	GG22-4	E42	GRL4	E45	HP10	N65	HSB200H9PF2	F8
GBM26	E48	GG24-2	E42	GRL5	E45	HP2HV	N79	HSB316T6PF18	F5
GBM29	E48	GIE2CG3	E52	GRL6	E45	HP3	N79	HSB332T6PF24	F5
GBM34	E48	GIE4CG3	E52	GSTUD14HY	E22	HP6	N65	HSB34H48PF5	F8
GBM4C	E48	GIE4CG3P5	E52	GSTUD34HY	E22	HP8	N65	HSB34H6PF10	F8
GC15A	E41	GIE4CG3P7	E52	GSTUD38HY	E22	HPP18	N82	HSB34H9PF10	F8
GC18A	E41	GIE4CG4	E52	GSTUD916HY	E22	HPP18-2	N82	HSB34T6PF8	F5
GC22A	E41	GIE4CG4P5	E52	GTC1AC34RA	E51	HPP5	N82	HSB35H3PF25	F8
GC2525CT	E50	GIE4CG4P7	E52	GX2626	E44	HPS-O/C-4-B11	N81	HSB35H48PF5	F8
GC2626	E48	GK1126	E33	GX264C	E44	HPS-O/C-4-B13	N81	HSB35H6PF25	F8
GC2626CT	E50	GK1129	E33	GX2926	E44	HPS-O/C-5-B11	N81	HSB38100T6PF8	F5
GC2929	E48	GK114C	E33	GX2929	E44	HPS-O/C-5-B13	N81	HSB38T6PF12	F5
GC2929CT	E50	GK1426	E33	GX294C	E44	HPT-59-R1	N80	HSC100FR	F10
GC3434	E48	GK1429	E33	GX3426	E44	HPT-60-R1	N80	HSC100FR100	F10
GC4C4C	E48	GK1434	E33	GX3429	E44	HPT-71-R1	N80	HSC112FR	F10
GC130	E48	GK1526	E33	GX3434	E44	HPT-72-R1	N80	HSC112FR100	F10
GCM26	E48	GK1529	E33	GX344C	E44	HPT-83-R1	N80	HSC12FR	F10
GCM29	E48	GK1626	E33	GX4C4C	E44	HPT-84-R1	N80	HSC12FR250	F10
GCM30	E48	GK1629	E33	GZ26-12	E49	HPT-96-R1	N80	HSC14FR	F10
GCM34	E48	GK1726	E33	GZ26-38	E49	HS_100FR	F11	HSC14FR250	F10
GCM4C	E48	GK1729	E33	GZ26-58	E49	HS_100FR100	F11	HSC18FR	F10
GCRT1/0	E45	GK1826	E33	GZ29-12	E49	HS_100T300PF	F7	HSC18FR250	F10
GD1526	E32	GK1829	E33	GZ29-38	E49	HS_100T48PF	F6	HSC200FR	F10
GD1529	E32	GK1926	E33	GZ29-58	E49	HS_112FR	F11	HSC200FR100	F10
GD1626	E32	GK1929	E33	GZ4C-12	E49	HS_112FR100	F11	HSC34FR	F10
GD1629	E32	GK6426	E33	GZ4C-38	E49	HS_116T300PF	F7	HSC34FR250	F10
GD1726	E32	GK6429	E33	GZ4C-58	E49	HS_116T48PF	F6	HSC38FR	F10
GD1729	E32	GK6434	E33	H12E	N95	HS_12FR	F11	HSC38FR250	F10
GD1734	E32	GK644C	E33	H1E34R	N95	HS_12FR250	F11	HSIC10-500FR	F9
GD174C	E32	GKA4C	E27	H34E12R	N95	HS_12T300PF	F7	HSIC200FR	F9
GD1826	E32	GKA8C	E27	HBR40	N78	HS_12T48PF	F6	HSIC269FR	F9
GD1829	E32	GL2626	E49	HBR66	N78	HS_14FR	F11	HSIC30-1000FR	F9
GD1834	E32	GL2929	E49	HCCACSR	N59	HS_14FR250	F11	HSIC350FR	F9
GD184C	E32	GL3434	E49	HCCCUAL	N59	HS_14T300PF	F7	HSIC4-40FR	F9
GD1926	E32	GL4C4C	E49	HCCGUY	N59	HS_14T48PF	F6	HSIC8-1FR	F9
GD1929	E32	GP10	N72	HCCGUYRPLBLDS	N59	HS_150T48PF	F6	HSKIT	B13
GD1934	E32	GP1126	E33	HCCSOL	N59	HS_18FR	F11	HSM100T6PF7	F5
GD194C	E32	GP1129	E33	HCCSOLRPLBLDS	N59	HS_18FR250	F11	HSM116T6PF26	F5
GD2026	E32	GP114C	E33	HFB22P1	A22	HS_18T300PF	F7	HSM12T6PF10	F5
GD2029	E32	GP1426	E33	HFB33-4N	A23, L21	HS_18T48PF	F6	HSM14T6PF14	F5
GD2034	E32	GP1429	E33	HFB33P1	A22-A23, L20-L21	HS_200FR	F11	HSM18T6PF20	F5
GD204C	E32	GP1434	E33	HFB42P1	A22	HS_200FR100	F11	HSM316T6PF18	F5
GD2126	E32	GP144C	E33	HFB44-4N	A23, L21	HS_200T48PF	F6	HSM332T6PF24	F5
GD2129	E32	GP1526G1	E56	HFB44P1	A22-A23, L20-L21	HS_316T300PF	F7	HSM34T6PF8	F5
GD2134	E32	GP1629	E33	HFB63P1	A22, L20	HS_316T48PF	F6	HSM38T6PF12	F5
GD214C	E32	GP164C	E33	HFB66-6N	A23, L21	HS_332T300PF	F7	HSSHRACK	B12
GD2226	E32	GP1726	E33	HFB66P1	A22-A23, L20-L21	HS_332T48PF	F6	HTP3	N79
GD2229	E32	GP1726G1	E56	HFB88P1	A22, L20	HS_34FR	F11	HYA_28	K65

Alpha-Numeric Index

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
HYA_29	K65	K3A25U-2	A26	KC34J12T13	E26, H39	KSU23	A5, H5	LF1010	K56, K58
HYA_31	K65	K3A25U-4	A27	KK3A36U-2N	A26	KSU25	A5, H5	LF2019	K56-K58
HYA_34	K65	K3A26U-2N	A26	KK3A36U-4N	A27	KSU26	A5, H5	LF2027	K56-K58
HYA_39	K65	K3A27U-2N	A26	KK3A40U-2N	A26	KSU27	A5, H5	LF2038	K56-K58
HYAO_28	K65	K3A27U-4N	A27	KK3A40U-4N	A27	KSU29	A5, H5	LF2065	K56-K58
HYAO_29	K65	K3A29U-2N	A26	KK3A44U-2N	A26	KSU31	A5, H5	LF2108	K58
HYAO_31	K65	K3A29U-4N	A27	KK3A44U-4N	A27	KSU34	A5, H5	LH28-3	L14
HYAO_34	K65	K3A2U-2	A26	KK4A36U-4N	A28	KUADP	N35	LH34-3	L14
HYAO_39	K65	K3A2U-4	A27	KK4A40U-4N	A28	KVS26	A7, H5, H7	LHR29-3	L14
HYFLUID GAL	041, N74	K3A31U-2N	A26	KK4A31U-2N	A24	KVS26A	A8, H8	LPC12S	N83
HYFLUID QT	041, N74	K3A31U-4N	A27	KLU125	A13	KVS28	A7, H5, H7	LPC38S	N83
HYM_28	K65	K3A36U-2N	A26	KLU125TP	A13	KVS28A	A8, H8	LPHT3CHISEL11418	N83
HYM_29	K65	K3A36U-4N	A27	KLU175	A13	KVS31	A7, H5, H7	LPHTADPMM71612	N83
HYM_31	K65	K3A40U-4N	A27	KLU175TP	A13	KVS31A	A8, H8	LPHTADPMMOP66	N75, N83
HYM_34	K65	K4A29U-4N	A28	KLU225	A13	KVS34	A7, H5, H7	LPHTADPSMFOP66	N77
HYM_39	K65	K4A31U-4N	A28	KLU225TP	A13	KVS34A	A8, H8	LPHTASPHALTCUT118	N83
HYS_28	K65	K6A34U-6N	K78	KLU25	A13	KVS40	A7, H5, H7	LPHTBIT111618D	N83
HYS_29	K65	K6B28-4N	K77	KLU25TP	A13	KVS40A	A8, H8	LPHTBIT111624D	N83
HYS_31	K65	K6B2826-2N	K77	KLU300	A13	KVS44	A7, H5, H7	LPHTBIT131618D	N83
HYS_34	K65	K6P28	K76	KLU300TP	A13	KVS44A	A8, H8	LPHTBIT131624D	N83
J1207	K70	K6P28C	K76	KLU35	A13	KVSU26	A7, H7	LPHTBIT151618D	N83
J1252	H36	K6P34U	K78	KLU35TP	A13	KVSU28	A7, H7	LPHTBIT151624D	N83
J1592	K70	K6P34UC	K78	KLU400	A13	KVSU31	A7, H7	LPHTCLAYSPADE118	N83
J278	E53	K6PC34U	K78	KLU400TP	A13	KVSU34	A7, H7	LPHTDRIPBODY66	N83
J279	E53	KA25	A14	KLU70	A13	KVSU40	A7, H7	LPHTDRIPBODY88	N83
J280	E53	KA25-2TC 38	A14	KLU70TP	A13	KVSU44	A7, H7	LPHTDRIPNOSE66	N83
J295	E53	KA25U	A24	KPA25	A11	KVSW26	A8, H6	LPHTDRIPNOSE88	N83
J990	H36	KA26U	A24	KPA28	A11	KVSW28	A8, H6	LPHTGRDVR11458	N83
K-PC28	K76	KA28	A14	KPA34	A11	KVSW31	A8, H6	LPHTGRDVR11858	N83
K11A30U	A28	KA29U	A29	KPA4C	A11	KVSW34	A8, H6	LPHTHOSNCR666610N77	N83
K11A34U-2	A28	KA2U	A24, A29	KPA4CUP	A12	KVSW40	A8, H6	LPHTHOSNCR666610OP	N77, N83
K11A36U-2	A28	KA30U	A24	KPA8C	A11	KVSW44	A8, H6	LPHTHOSNCR66668	N75, N77, N83
K11A39U-2	A28	KA31U	A24	KPA8CUP	A12	L717W	N52	LPHTHOSNCR666680P	N77
K21A36U-2	A28	KA34	A14	KPB4CG1	E27	L719W	N52	LPHTHOSNCR66668QP	N83
K22A36U-2	A28	KA34U	A24	KPU29A26AC	A36	L720W	N52	LPHTHTMABODY66	N75, N77
K22A39U-2	A28	KA36U	A24	KPU29A29AC	A36	L722W	N52	LPHTHTMADUSTCAPF	N83
K29P	K31	KA36U-2N	A24	KPU34A26AC	A36	L724W	N52	LPHTHTMADUSTCAPM	N83
K2A25U	A25	KA40U	A24	KPU34A34AC	A36	L725W	N52	LPHTHTMANOSE66	N75, N77
K2A26U	A25	KA40U-2N	A24	KPU39A26AC	A36	L727W	N52	LPHTMOILPT118	N83
K2A29U	A25	KA44U	A24	KPU39A39AC	A36	L728W	N52	LPHTMOILPT11814	N83
K2A31U	A25, A29	KA44U-2N	A24	KS	H4	L729W	N52	LPHTNARCHISEL11814	N83
K2A31U-2N	A25	KA4C	A14	KS15	A4, E26, H4	L735W	N52	LPHTSOC121	N83
K2A36U	A25	KA6U	A24	KS17	A4, E26	LB13A	L30	LPHTSOC1211/118	N83
K2A36U-2N	A25	KA8C	A14	KS17-3	A4, H4	LB14A	L30	LPHTSOC121116	N83
K2A40U	A25, A29	KAU-KIT1	A29	KS20	A4, E26, H4	LB15A	L30	LPHTSOC121112	N83
K2A40U-2N	A25	KAU-KIT2	A29	KS20-3	A4, H4	LB16A	L30	LPHTSOC121114	N83
K2A44U	A25	KAU-KIT3	A29	KS22	A4, E26, H4	LB17A	L30	LPHTSOC121118	N83
K2A44U-2N	A25	KAU-KIT4	A29	KS22-3	A4, H4	LB18A	L30	LPHTSOC121118PT	N83
K2C15	E25	KC15	E25	KS23	A4, E26, H4	LB19A	L30	LPHTSOC1212	N83
K2C15B1	E25	KC15B1	E25	KS25	A4, E26, H4	LB20A	L30	LPHTSOC12128PT	N83
K2C17	E25	KC17	E25	KS26	A4, E26, H4	LB21A	L30	LPHTSOC121316/1516	N83
K2C17B1	E25	KC17B1	E25	KS27	A4, E26, H4	LB22A	L30	LPHTSOC121316PT	N83
K2C20	E25	KC20	E25	KS29	A4, E26, H4	LB24A	L30	LPHTSOC12138PT	N83
K2C20B1	E25	KC20B1	E25	KS31	A4, E26, H4	LB53A	L30	LPHTSOC12138	N83
K2C22	E25	KC22	E25	KS34	A4, E26, H4	LB54A	L30	LPHTSOC1215168PT	N83
K2C22B1	E25	KC22B1	E25	KS39	A4, H4	LB55A	L30	LPHTSOC121716	N83
K2C23	E25	KC22J12T13	E26, H39	KS44	A4, H4	LB56A	L30	LPHTSOC121716PT	N83
K2C23B1	E25	KC23	E25	KS90	A4, H4	LB57A	L30	LPHTSOC121768PT	N83
K2C25	E25	KC23B1	E25	KSA 1/0	A6	LB58A	L30	LPHTSOC1218PT	N83
K2C25B1	E25	KC25	E25	KSA 2/0	A6	LB59A	L30	LPHTSOC1234	N83
K2C26	E25	KC25B1	E25	KSA 350	A6	LB86A	L30	LPHTSOC12348PT	N83
K2C26B1	E25	KC26	E25, E26, H39	KSA 4/0	A6	LB90A	L30	LPHTSOC12588PT	N83
K2C28	E25	KC26B1	E25	KSA 500	A6	LB91A	L30	LPHTSOC1278	N83
K2C28B1	E25	KC28	E25	KSA2	A6	LB92A	L30	LPHTSOC12788PT	N83
K2C31	E25	KC28B1	E25	KSA4	A6	LB94A	L30	LPHTSOC12916	N83
K2C31B1	E25	KC31	E25	KSA6	A6	LB96A	L30	LPHTWHP-BCS66606-18	N80
K2C34	E25	KC31B1	E25	KSU17	A5, H5	LF1006	K58	LPHY750CXT	N77
K2C34B1	E25	KC34	E25	KSU20	A5, H5	LF1025	K56-K58		
K33B34-4N	K77	KC34B1	E25	KSU22	A5, H5	LF1014	K56-K58		

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
LPHV750XT	N77	MD6-6HS72	N24	NA21-4N	L4	NDR65534T12	L15	NNTR36A29A	L24
LSC1/0	H17	MD6-6R	N23	NA22-4N	L4	NDR65544T12	L15	NNTR36A36A	L24
LSC1/0-1	H17	MD6-6R-2	N23	NA22A-4N	L25	NDR6644T12	L15	NNTR42A32A	L24
LSC556	H17	MD6-8AH48	N24	NAH29-2N	L5	NDR6728T12	L15	NNTR42A36A	L24
LSC556-1	H17	MD6-8HS60	N24	NAH34-2N	L5	NDR6734T12	L15	NNTR42A42A	L24
LYM1CC	K57	MD6-8HS72	N24	NAH34-34N	L5	NDR6744T12	L15	NNTR45A45A	L24
LYM25C	K57	MD6-8R	N23	NAH40-2N	L5	NDR6748T12	L15	NNTR46A42A	L24
LYM26C	K57	MD6-AH48	N24	NAH40-34N	L5	NDR6844T12	L15	NNTR46A46A	L24
LYM27C	K57	MD6-CP1	N22	NAH40-44N	L5	NDR6848T12	L15	NNTR48A48A	L24
LYM28C	K57	MD6-K	N19	NAH44-2N	L5	NHNT1329	L9	NS1313	L11
LYM29C	K57	MD6HS60	N24	NAH44-34N	L5	NHNT1429	L9	NS1414HC	L11
LYM2CC	K57	MD6HS72	N24	NAH44-44N	L5	NHNT1434	L9	NS14A14A	L24
LYM30C	K57	MD6R	N23	NAH46-2N	L5	NHNT1529	L9	NS1515	L11
LYM31C	K57	MD7	N20	NAH46-34N	L5	NHNT1534	L9	NS15A15A	L24
LYM32C	K57	MD7-34	N21	NAH46-44N	L5	NHNT1540	L9	NS1616HC	L11
LYM34C	K57	MD7-34-KIT1	N21	NAH48-2N	L5	NHNT1629	L9	NS1717	L11
LYM34P3	K61	MD7-34R	N21	NAH48-34N	L5	NHNT1634	L9	NS17A17A	L24
LYS1CC	K56	MD7-34R-KIT1	N21	NAH48-44N	L5	NHNT1640	L9	NS1818	L11
LYS1CP5	K60	MD7-6	N20	NAR25A-2N	L28	NHNT1644	L9	NS18A18A	L24
LYS25C	K56	MD7-8	N20	NAR29A-2N	L28	NHNT1729	L9	NS1919	L11
LYS25P5	K60	MK7	G16	NAR29A-4N	L28	NHNT1734	L9	NS19A19A	L24
LYS26C	K56	MK9	G16	NAR32A-2N	L28	NHNT1740	L9	NS2020	L11
LYS26P5	K60	MR15	N11	NAR32A-4N	L28	NHNT1744	L9	NS20A20A	L24
LYS27C	K56	MR18	N11	NAR36A-2N	L28	NHNT1829	L9	NS2121	L11
LYS27P5	K60	MR20	N11	NAR36A-4N	L28	NHNT1834	L9	NS21A21A	L24
LYS28C	K56	MR4C	N12	NAR42A-2N	L28	NHNT1840	L9	NS2222	L11
LYS28P5	K60	MR8-1A	N10	NAR42A-4N	L28	NHNT1844	L9	NS22A22A	L24
LYS29C	K56	MR8-33S-1	N10	NAR45A-2N	L28	NHNT1846	L9	NS24A24A	L24
LYS29P5	K60	MR8-33T-1	N10	NAR45A-4N	L28	NHNT1929	L9	NSNT1329	L9
LYS2CC	K56	MR8-9Q	N10	NAR46A-2N	L28	NHNT1934	L9	NSNT1429	L9
LYS2CP5	K60	MR8-G96	N10	NAR46A-4N	L28	NHNT1940	L9	NSNT1434	L9
LYS30C	K56	MR8-G98	N10	NAR48A-2N	L28	NHNT1944	L9	NSNT1529	L9
LYS30P5	K60	MRC840	N15	NAR48A-4N	L28	NHNT1946	L9	NSNT1629	L9
LYS31C	K56	MRC840AL	N15	NAS29-2N	L5	NHNT2044	L9	NSNT2929	L10
LYS31P5	K60	MTB	N97-N98	NAS29-34N	L5	NHNT2929	L10	NSNT3429	L10
LYS32C	K56	MTX	N97-N98	NAS29-N	L5	NHNT3429	L10	NSNT3434	L10
LYS32P5	K60	MY28	N16	NAS34-2N	L5	NHNT3434	L10	NT1313	L8
LYS32P6	K61	MY28-4	N16	NAS34-34N	L5	NHNT4429	L10	NT1413	L8
LYS34C	K56	MY28-6	N16	NAS34-N	L5	NHNT4434	L10	NT1414	L8
LYS34P1G5	K59	MY29 UNIVERSAL KIT	N16	NAS40-2N	L5	NHNT4440	L10	NT1514	L8
LYS34P2	K59	MY29-11	N16	NAS40-34N	L5	NHNT4444	L10	NT1515	L8
LYS34P5	K60	MY29-11C	N16	NBC15A-2N	L27	NHNT4834	L10	NT1614	L8
LYS48P6	K61	MY29-3	N16	NBC15A-34N	L27	NHNT4840	L10	NT1615	L8
LYS4CC	K56	MY29-3C	N16	NBC16A-2N	L27	NHNT4844	L10	NT1616	L8
LYS4CP5	K60	MY29-3CF	N16	NBC16A-34N	L27	NHNT4846	L10	NT1714	L8
LYS64P6	K61	N2AH34-34N	L6	NBC16A-44N	L27	NHNT4848	L10	NT1715	L8
LYS6CP5	K60	N2AH40-34N	L6	NBC17A-2N	L27	NNT15A15A	L23	NT1717	L8
LYS80P6	K61	N2AH44-34N	L6	NBC17A-34N	L27	NNT16A16A	L23	NT1816	L8
M20	H66	N2AH44-44N	L6	NBC17A-44N	L27	NNT17A17A	L23	NT1817	L8
M30	H66	N2AH46-44N	L6	NBC18A-2N	L27	NNT18A18A	L23	NT1818	L8
M40	H66	NA13-2N	L4	NBC18A-34N	L27	NNT19A19A	L23	NT1919	L8
M50	H66	NA14-2N	L4	NBC18A-44N	L27	NNT20A20A	L23	NT2020	L8
M60	H66	NA15-2N	L4	NBC19A-34N	L27	NNT21A20A	L23	NT2121	L8
M70	H66	NA15-4N	L4	NBC19A-44N	L27	NNT22A22A	L23	NT2222	L8
M80	H66	NA15A-2N	L25	NBC20A-34N	L27	NNTR14A29A	L23	NYFT	K55
M8ND	N14	NA15A-4N	L25	NBC20A-44N	L27	NNTR14A36A	L23	NYT2526	K63
M90	H66	NA16-2N	L4	NBC21A-44N	L27	NNTR15A36A	L23	NYT2825	K63
MCC1000	N56	NA16-4N	L4	NBC22A-34N	L27	NNTR15A42A	L23	NYT2828	C109, K63
MCC1000BLADESET	N56	NA16A-4N	L25	NBC22A-44N	L27	NNTR16A29A	L23	NYT282C	K63
MCC500	N56	NA17-2N	L4	NBC24A-34N	L27	NNTR16A32A	L23	NYT2925	C109, K63
MCC500BLADESET	N56	NA17-4N	L4	NBC86A-44N	L27	NNTR16A42A	L23	NYT2926	K63
MD6	N19	NA17A-2N	L25	NDR6328T13	L15	NNTR17A29A	L23	NYT2928	K63
MD6-12	N19	NA17A-4N	L25	NDR6428T16	L15	NNTR18A29A	L23	NYT2929	C109, K63
MD6-14	N19	NA18-4N	L4	NDR6434T16	L15	NNTR19A42A	L23	NYT292C	K63
MD6-37	N19	NA18A-2N	L25	NDR6444T16	L15	NNTR20A32A	L23	NYT3125	K63
MD6-38	N19	NA18A-4N	L25	NDR6528T14	L15	NNTR22A46A	L23	NYT3126	K63
MD6-4	N19	NA19-4N	L4	NDR6534T14	L15	NNTR29A29A	L24	NYT3128	K63
MD6-6	N19	NA19A-4N	L25	NDR6544T14	L15	NNTR32A25A	L24	NYT3129	K63
MD6-6HS60	N24	NA20A-4N	L25	NDR65528T12	L15	NNTR32A32A	L24	NYT3131	K63

Alpha-Numeric Index

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
NYT3426	C109, K63	PEN A13-8	F4	PT 29402-1	N74	Q2A34-2N	A17	QGFL39B1	A34, E54, L17
NYT3428	C109, K63	PEN A13-GAL	F4	PT 29900-10	N73	Q2A34-4N	A17	QGFL39B1T6	A34, E54, L17
NYT3429	C109, K63	PEN A13-QT	F4	PT 29900-15	N73	Q2A40-2N	A17	QGFL44B1	A34, E54, L17
NYT3431	K63	PEN E-4	F4	PT 29900-25	N73	Q2A40-4N	A17	QGFL44B1T6	A34, E54, L17
NYT3434	C109, K63	PEN E-55GAL	F4	PT 29901-10	N73	Q2A44-4N	A17	QGFL46B1	A34, E54, L17
NYT3926	K63	PEN E-5GAL	F4	PT 29901-15	N73	Q2A46-4N	A17	QGFL46B1T6	A34, E54, L17
NYT3928	K63	PEN E-8	F4	PT 29901-25	N73	Q2B28-2N	A18	QGFL48B1	A34, E54, L17
NYT3929	C109, K63	PEN E-GAL	F4	PT 29902-10	N73	Q2B31-2N	A18	QN10F25X03B	B44
NYT3931	K63	PEN E-QT	F4	PT 29902-15	N73	Q2B40-4N	A18	QN10F25X03D	B44
NYT3934	C109, K63	PENA 1/2	F4	PT 29902-25	N73	Q3A28-2N	A17	QN14F18X02B	B44
NYT3939	K63	PENA 55GAL	O41	PT 6545	N74	Q3A28-4N	A17	QN14F18X02D	B44
NYT4426	K63	PENA 5GAL	O41	PT 76	N73	Q3A31-2N	A17	QN14F25X03B	B44
NYT4428	K63	PENA GAL	O41	PT 91	N73	Q3A31-4N	A17	QN14F25X03D	B44
NYT4429	C109, K63	PENA QT	O41	PT 93	N74	Q3A34-2N	A17	QN14M18X02B	B45
NYT4431	C109, K63	PENA-4	O41	PT 94	N74	Q3A34-4N	A17	QN14M18X02D	B45
NYT4434	C109, K63	PENA1/2	O41	PT10024162	N58	Q3A40-4N	A17	QN14M25X03B	B45
NYT4439	K63	PENA13 55GAL	O41	PT10037384	N58, N60, N63	Q3A44-4N	A17	QN14M25X03D	B45
NYT4444	C109, K63	PENA13 5GAL	O41	PT10037388	N58, N60, N63	Q3A46-4N	A17	QN18F18X02B	B44
NYT4639	K63	PENA13-QT	O41	PT10038657	N61, N64	QA1C-2B	A16	QN18F18X02D	B44
NYT4629	K63	PENA13-8	O41	PT10040663	N61, N64	QA1C-B	A16	QN18F25X03B	B44
NYT4631	K63	PENA13CARTRIDGE	F4, O41	PT10043890	N63	QA26-2B	A16	QN18F25X03D	B44
NYT4634	K63	PENA13GAL	O41	PT10044980	N61	QA26-B	A16	QN18M18X02B	B45
NYT4639	K63	PENA13QT	O41	PT10054094	N64	QA28-2B	A16	QN18M18X02D	B45
NYT4644	K63	PENACARTRIDGE	F3-F4, O41	PT10128	N51	QA28-2N	A16	QN18M25X03D	B45
NYT4646	C109, K63	PENE 55GAL	O41	PT17188	N23	QA28-B	A16	QP10F25X03B	B43
OH25	N17	PENE 5GAL	O41	PT208620	N34-N36, N38, N41, N60-N61	QA31-2B	A16	QP10F25X03D	B43
OUR840	N18	PENE GAL	O41	PT29279-2	N30, N46	QA31-2N	A16	QP14F110X02D	B43
OUR840-WC	N18	PENE QT	O41	PT29291	C9, N4-N5, N28, N30, N46	QA31-B	A16	QP14F18X02B	B43
P15K	N37, N51	PENE-4	O41			QA34-2B	A16	QP14F18X02D	B43
P8A	F4, O41	PENE-8	O41			QA34-2N	A16	QP14F25X03B	B43
PAT46-18V	N37	PENETROX A	F3	PT29360	N28	QA34-4B	A16	QP14F25X03D	B43
PAT46C-18V	N37	PENETROX A-13	F3	PT29402-1	N46	QA34-B	A16	QP14M18X02B	B45
PAT4PC834-18V	N39	PENETROX E	F3	PT2972	N28	QA40-2N	A16	QP14M18X02D	B45
PAT600-18V	N41	PENETROX™ HT	F3	PT4583	N17-N18	QA40-B	A16	QP14M25X03B	B45
PAT644XT-18V	N36	PENHT-1LB	F4, O41	PT4925	N22-N23	QA44-2N	A16	QP14M25X03D	B45
PAT750K-18V	N35	PENHT-4	F4, O41	PT4931-1	N22	QA44-4N	A16	QP18F110X02D	B43
PAT750XT-18V	N34	PENHT-8	F4, O41	PT4946	N4	QA44-B	A16	QP18F18X02B	B43
PAT81KFT-18V	N38	PENHT-GAL	F4, O41	PT4952-1	N22	QA46-2N	A16	QP18F18X02D	B43
PATCHGR18V	N34-N38, N40-N41, N59-N61	PG121-1	N12	PT6515	N50	QA46-B	A16	QP18F25X03B	B43
PATCHGR250V	N34-N37, N40-N41, N59-N61	PG125-1	N12	PT6545	N50	QA4C-2B	A16	QP18F25X03D	B43
		PG133-1	N12	PT6733	N22, N28	QA4C-B	A16	QP18M18X02B	B45
		PGN1425X03B	B46	PT6744	N22	QA8C-2B	A16	QP18M18X02D	B45
		PGN1425X03D	B46	PT8504	N17	QA8C-B	A16	QP18M25X03B	B45
		PGN1825X03B	B46	PU998	N5	QB1C	A18	QP18M25X03D	B45
		PGN1825X03D	B46	PUADP-1	N37, N51	QB26	A18	QPX2828	A9, H13
		PGP1425X03B	B46	Q14F11X02B	B43	QB28	A18	QPX2828-Y	A10
		PGP1425X03D	B46	Q14F11X02D	B43	QB31-2N	A18	QPX282C	A9, H13
		PGP1825X03B	B46	Q14F18X02B	B43	QB4C	A18	QPX282C-Y	A10
		PGP1825X03D	B46	Q14F18X02D	B43	QB8C	A18	QPX2C2C	A9, H13
		POWERCELL	O41	Q14F25X03B	B43	QDA1C	A19	QPX2C2C-Y	A10
		PQ10R258M	N55	Q14F25X03D	B43	QDA26	A19	QPX3428	A9, H13
		PQ14R187M	N55	Q14M18X02B	B44	QDA28	A19	QPX3428-Y	A10
		PQ14R188M	N55	Q14M18X02D	B44	QDA31	A19	QPX342C	A9, H13
		PQ14R256M	N55	Q14M25X03B	B44	QDA34	A19	QPX342C-Y	A10
		PQ14R257M	N55	Q14M25X03D	B44	QDA40	A19	QPX3434	A9, H13
		PQ14R258M	N55	Q18F18X02B	B43	QDA4C	A19	QPX3434-Y	A10
		PQ18R187M	N55	Q18F18X02D	B43	QDA8C	A19	QPX4428	A9, H13
		PQ18R188M	N55	Q18F25X03B	B43	QGFL1CB1	A34, E54, L17	QPX442C	A9, H13
		PQ18R256M	N55	Q18F25X03D	B43	QGFL1CB1T6	A34, E54, L17	QPX4434	A9, H13
		PQ18R257M	N55	Q18M18X02B	B44	QGFL26B1	A34, E54, L17	QPX4444	A9, H13
		PQ18R258M	N55	Q18M18X02D	B44	QGFL26B1T6	A34, E54, L17	QPX4444-Y	A10
		PT 10128	N74	Q18M25X03B	B44	QGFL26B2	A34, E54, L17	QQA1C	A16
		PT 11018	N74	Q18M25X03D	B44	QGFL26B2T6	A34, E54, L17	QQA1C-2	A16
		PT 29074-1	N73-N74	Q2A1C-2	A17	QGFL29B1	A34, E54, L17	QQA26	A16
		PT 29075	N74	Q2A26-2N	A17	QGFL29B1T6	A34, E54, L17	QQA26-2	A16
		PT 29091	N74	Q2A28-2N	A17	QGFL31B1	A34, E54, L17	QQA28	A16
		PT 29214-1	N74	Q2A28-4N	A17	QGFL31B1T6	A34, E54, L17	QQA28-2N	A16
		PT 29279-2	N28	Q2A31-2N	A17	QGFL34B1	A34, E54, L17	QQA31	A16
		PT 29291	N74	Q2A31-4N	A17	QGFL34B1T6	A34, E54, L17	QQA31-2N	A16

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
QQA34	A16	RYA2UCR	K68	S2GBP441AB2	M32	SH2GBP41A512	M30	SWA18A-34N	M9
QQA34-2N	A16	RYA2WAC	K68	S2GBP441AB4	M34	SH2GBP41A512B2	M32	SWA18A-44N	M9
QQA40-2N	A16	RYA2WACR	K68	S2GBP4445A	M30	SH2GBP41A512B4	M34	SWA19A-2N	M9
QQA40-4N	A16	RYA31AC	K68	S2GBP4445A12	M30	SH2GBP41A5B2	M32	SWA19A-34N	M9
QQA44-2N	A16	RYA31ACR	K68	S2GBP4445A12B2	M32	SH2GBP41A5B4	M34	SWA19A-44N	M9
QQA4C	A16	RYA31C-2	K68	S2GBP4445A12B4	M34	SH2GBP445A5	M30	SWA20A-2N	M9
QQA4C-2	A16	RYA31CR-2	K68	S2GBP4445AB2	M32	SH2GBP445A512	M30	SWA20A-34N	M9
QR1C	A19	RYA34C-2	K68	S2GBP4445AB4	M34	SH2GBP445A512B2	M32	SWA20A-44N	M9
QR26	A19	RYA34CR-2	K68	S2GBP444A	M30	SH2GBP445A512B4	M34	SWA21A-34N	M9
QR28	A19	RYA4UC	K68	S2GBP444A12	M30	SH2GBP445A5B2	M32	SWA21A-44N	M9
QR31	A19	RYA4UCR	K68	S2GBP444A12B2	M32	SH2GBP445A5B4	M34	SWA22A-44N	M9
QR34	A19	RYA75AC	K68	S2GBP444A12B4	M34	SH2GBP44A5	M30	SWA23A-44N	M9
QR40	A19	RYA75ACR	K68	S2GBP444AB2	M32	SH2GBP44A512	M30	SWA24A-34N	M9
QR4C	A19	RYAC25	K68, K70	S2GBP444AB4	M34	SH2GBP44A512B2	M32	SWA24A-44N	M9
R17A	N97-N99	RYAC31	K68, K70	S2GBP445A	M30	SH2GBP44A512B4	M34	SWA444A-44N	M10
R17C	N97-N99	RYAC31-1	K70	S2GBP445A12	M30	SH2GBP44A5B2	M32	SWA44R-44N	M10
R22B	N97-N99	S2D451R-SG1	I70	S2GBP445A12B2	M32	SH2GBP44A5B4	M34	SWA45A-4N	M10
R24F	N97-N99	S2GBP41A	M30	S2GBP445A12B4	M34	SH2GBP45A5	M30	SWA486A-44N	M10
R25D	N97-N99	S2GBP41A12	M30	S2GBP445AB2	M32	SH2GBP45A512	M30	SWA486A-4N	M10
RA6UC-SL	K69	S2GBP41A12B2	M32	S2GBP445AB4	M34	SH2GBP45A512B2	M32	SWA486A-66N	M10
RA6UCR-SL	K69	S2GBP41A12B4	M34	S2GBP446A	M31	SH2GBP45A512B4	M34	SWA48A-44N	M10
RCC1000	N57	S2GBP41AB2	M32	S2GBP446A12	M31	SH2GBP45A5B2	M32	SWA493R-4N	M10
RCC336	N57	S2GBP41AB4	M34	S2GBP446A12B2	M33	SH2GBP45A5B4	M34	SWA54R-44N	M10
RCC556	N57	S2GBP445A	M30	S2GBP446A12B4	M35	SH2GBP46A5	M31	SWA58A-2N	M9
RCC600	N57	S2GBP445A12	M30	S2GBP446AB2	M33	SH2GBP46A512	M31	SWA58A-34N	M9
RCC750HD	N57	S2GBP445A12B2	M32	S2GBP446AB4	M35	SH2GBP46A512B2	M33	SWA58A-44N	M9
RCC954ACSR1K	N57	S2GBP445A12B4	M34	S2GBP4483A	M31	SH2GBP46A512B4	M35	SWA58R-44N	M10
RDM4-28	K67	S2GBP445AB2	M32	S2GBP4483A12	M31	SH2GBP46A5B2	M33	SWA59A-2N	M9
RDM5-28T	K68	S2GBP445AB4	M34	S2GBP4483A12B2	M33	SH2GBP46A5B4	M35	SWA59A-34N	M9
RDM6-28	K67	S2GBP44A	M30	S2GBP4483A12B4	M35	SH2GBP483A5	M31	SWA59A-44N	M9
RDM7-28T	K68	S2GBP44A12	M30	S2GBP4483AB2	M33	SH2GBP483A512	M31	SWA86A-44N	M9
RDM8-28	K67	S2GBP44A12B2	M32	S2GBP4483AB4	M35	SH2GBP483A512B2	M33	SWA90A-2N	M9
RDMD-28CR	K67	S2GBP44A12B4	M34	S2GBP4486A	M31	SH2GBP483A512B4	M35	SWA90A-34N	M9
RDMD4-2858D	K67	S2GBP44AB2	M32	S2GBP4486A12	M31	SH2GBP483A5B2	M33	SWA90A-44N	M9
RDMD4-28G3	K67	S2GBP44AB4	M34	S2GBP4486A12B2	M33	SH2GBP483A5B4	M35	SWA91A-34N	M9
RDMD6-2858D	K67	S2GBP45A	M30	S2GBP4486A12B4	M35	SH2GBP486A5	M31	SWA91A-44N	M9
RDMD6-28G3	K67	S2GBP45A12	M30	S2GBP4486AB2	M33	SH2GBP486A512	M31	SWA92A-44N	M9
RGC39G1	E53	S2GBP45A12B2	M32	S2GBP4486AB4	M35	SH2GBP486A512B2	M33	SWA93A-44N	M9
RGC44G1	E53	S2GBP45A12B4	M34	S2GBP448A	M31	SH2GBP486A512B4	M35	SWA94-44N	M9
RHCC129ACSR	N63	S2GBP45AB2	M32	S2GBP448A12	M31	SH2GBP486A5B2	M33	SWA94A-34N	M9
RHCC245CUAL	N64	S2GBP45AB4	M34	S2GBP448A12B2	M33	SH2GBP486A5B4	M35	SWA96A-44N	M9
RHCCCHA	N63	S2GBP46A	M31	S2GBP448A12B4	M35	SH2GBP48A5	M31	SWAB19A-2N	M17
RK141-2	B58	S2GBP46A12	M31	S2GBP448AB2	M33	SH2GBP48A512	M31	SWAB19A-34N	M17
RK141ABOX100	B58	S2GBP46A12B2	M33	S2GBP448AB4	M35	SH2GBP48A512B2	M33	SWAB22A-2N	M17
RK142-2	B58	S2GBP46A12B4	M35	S3D451R-SG1	I70	SH2GBP48A512B4	M35	SWAB22A-34N	M17
RK142ABOX100	B58	S2GBP46AB2	M33	S3D55R-SG1	I70	SH2GBP48A5B2	M33	SWAB22A-44N	M17
RK147-2	N25	S2GBP46AB4	M35	S3GBP41A	M36	SH2GBP48A5B4	M35	SWAB86A-2N	M17
RK149-2	A38	S2GBP483A	M31	S3GBP445A	M36	SN10	B55	SWAB86A-34N	M17
RK150-2	A38	S2GBP483A12	M31	S3GBP44A	M36	SN14	B55	SWAB86A-44N	M17
RK151-2	A38	S2GBP483A12B2	M33	S3GBP45A	M36	SN18	B55	SWAC18A-2N	M11
RK152-2	A38	S2GBP483A12B4	M35	S3GBP46A	M36	SNM14	B56	SWAC18A-34N	M11
RK153-2	A38	S2GBP483AB2	M33	S3GBP483A	M36	SNM18	B56	SWAC18A-44N	M11
RK194-2	N25	S2GBP483AB4	M35	S3GBP486A	M36	SP10	B54	SWAC19A-2N	M11
RK225-2	A38	S2GBP486A	M31	S3GBP48A	M36	SP14	B54	SWAC19A-34N	M11
RK226-2	A38	S2GBP486A12	M31	S4D48R-SG1	I70	SP16	B54	SWAC19A-44N	M11
RK227-2	A38	S2GBP486A12B2	M33	S6D441R-SG1	I70	STS33A-4N	M29	SWAC20A-2N	M11
RP50RP02	N62	S2GBP486A12B4	M35	SC2	A4, H4	STS43A-4N	M29	SWAC20A-34N	M11
RP50RP03	N62	S2GBP486AB2	M33	SC2/0	A4, H4	STS44A-4N	M29	SWAC20A-44N	M11
RYA25UC	K68	S2GBP486AB4	M35	SC4	A4, H4	STS44A-4NCG2	M29	SWAC21A-34N	M11
RYA25UCR	K68	S2GBP48A	M31	SCB19A	M27	STS46A-6NCG1	M29	SWAC21A-44N	M11
RYA26UC	K68	S2GBP48A12	M31	SCB20A	M27	SW3A20A44N8	M38	SWAC22A-34N	M11
RYA26UCR	K68	S2GBP48A12B2	M33	SCB21A	M27	SW3A22A44N8	M38	SWAC22A-44N	M11
RYA27UC	K68	S2GBP48A12B4	M35	SCB22A	M27	SW3A24A44N8	M38	SWAC23A-34N	M11
RYA27UCR	K68	S2GBP48AB2	M33	SCB24A	M27	SW3A86A44N8	M38	SWAC24A-34N	M11
RYA28UC	K68	S2GBP48AB4	M35	SCB86A	M27	SW3AB20A44N8	M39	SWAC24A-44N	M11
RYA28UCR	K68	S2GBP4A1A	M30	SF2A44NL12EX	M37	SW3AB22A44N8	M39	SWAC58A-2N	M11
RYA29UC	K68	S2GBP4A1A12	M30	SF2A44NL18EX	M37	SW3AB24A44N8	M39	SWAC58A-34N	M11
RYA29UCR	K68	S2GBP4A1A12B2	M32	SF3A44N8	M40	SW3AB86A44N8	M39	SWAC58A-44N	M11
RYA2UC	K68	S2GBP4A1A12B4	M34	SH2GBP41A5	M30	SWA18A-2N	M9	SWAC59A-2N	M11

Alpha-Numeric Index

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
SWAC59A-34N	M11	SWOH18A-5	M22	SWXA22A-44N	M13	TDM177RG2	I69	TN1412G1	B16
SWAC59A-44N	M11	SWOH19A-3	M22	SWXA22A-4NK8	M12	TDM210RG1	I69	TN146G1	B16
SWAC86A-44N	M11	SWOH19A-5	M22	SWXA24A-44N	M13	TDM210RG2	I69	TN18-10	B16
SWAC90A-2N	M11	SWOH20A-3	M22	SWXA24A-4NK8	M12	TDM246RG1	I69	TN18-10F	B37
SWAC90A-34N	M11	SWOH20A-5	M22	SWXA86A-44N	M13	TDM330RG1	I69	TN18-14	B16
SWAC90A-44N	M11	SWOH21A-3	M22	SWXA86A-4NK8	M12	TDM393RG1	I69	TN18-14F	B37
SWAC91A-34N	M11	SWOH21A-5	M22	SWXA92A-44N	M13	TDM430RG1	I69	TN18-38	B16
SWAC91A-44N	M11	SWOH22A-3	M22	SWXA92A-4NK8	M12	TDM99RG1	I69	TN18-4	B16
SWAC92A-34N	M11	SWOH22A-5	M22	SWXA94A-44N	M13	TFM1D5R	N54	TN18-516	B16
SWAC92A-44N	M11	SWOH24A-5	M22	SWXA94A-4NK8	M12	TFV3B12V2	G12	TN18-6	B16
SWAC93A-34N	M11	SWOH86A-5	M22	SWXA96A-4NK8	M12	TFV3B18V2	G12	TN18-6F	B37
SWAC94A-34N	M11	SWT17A17A	M18	SWXHP19A-5	M25	TFV3B6V2	G12	TN18-8	B16
SWAC94A-44N	M11	SWT18A16A-75	M20	SWXHP20A-5	M25	TFV3BLU12	G12	TN18-8F	B37
SWAC96A-44N	M11	SWT18A17A-75	M20	SWXHP21A-5	M25	TFV3BLU18	G12	TN186G1	B16
SWAT18A16A-30	M21	SWT19A16A-75	M20	SWXHP22A-5	M25	TMH261	D4	TN20-2F	B37
SWAT18A17A-30	M21	SWT19A17A-75	M20	SWXHP24A-5	M25	TMH261SS	D4	TN20-6F	B37
SWAT18A18A-30	M21	SWT19A18A-75	M20	SWXHP59A-5	M25	TMH262	D4	TP10-10	B15
SWAT19A16A-30	M21	SWT19A19A	M18	SWXHP86A-5	M25	TMH262SS	D4	TP10-10F	B39
SWAT19A17A-30	M21	SWT20A17A-75	M20	SWXHP90A-5	M25	TMH263	D4	TP10-10LF	B42
SWAT19A18A-30	M21	SWT20A18A-75	M20	SWXHP91A-5	M25	TMH263SS	D4	TP10-10Z	B41
SWAT2019A-30	M21	SWT20A19A-75	M20	SWXHP92A-5	M25	TMH264	D4	TP10-14	B15
SWAT20A17A-30	M21	SWT21A14A	M18	SWXHP94A-5	M25	TMH264SS	D4	TP10-38	B15
SWAT20A18A-30	M21	SWT21A15A	M18	SWXHP96A-5	M25	TMH265	D4	TP10-6	B15
SWAT21A16A-30	M21	SWT21A16A	M18	SWXP20A20A	M16	TMH265SS	D4	TP10-6F	B39
SWAT21A17A-30	M21	SWT21A16A-75	M20	SWXP22A22A	M16	TMH266	D4	TP10-6LF	B42
SWAT21A18A-30	M21	SWT21A17A	M19	SWXP24A24A	M16	TMH267	D4	TP10-6Z	B41
SWAT21A19A-30	M21	SWT21A17A-75	M20	SWXP86A86A	M16	TMH267SS	D4	TP10-8	B15
SWAT21A20A-30	M21	SWT21A18A	M19	SWXP90A90A	M16	TMH268	D4	TP10-8F	B39
SWAT22A20A-30	M21	SWT21A18A-75	M20	SWXP92A92A	M16	TMH268SS	D4	TP10-8LF	B42
SWAT24A18A-30	M21	SWT21A19A	M19	SWXP94A94A	M16	TMH269	D4	TP10-8Z	B41
SWAT24A19A-30	M21	SWT21A19A-75	M20	SWXP96A96A	M16	TMH269SS	D4	TP14-10	B15
SWAT24A20A-30	M21	SWT21A20A	M19	T10-10	B14	TMH270	D4	TP14-10F	B39
SWAT86A20A-30	M21	SWT22A18A	M19	T10-10F	B34	TMH270SS	D4	TP14-10LF	B42
SWAT86A21A-30	M21	SWT22A18A-30	M21	T10-14	B14	TMH271	D4	TP14-10Z	B41
SWAT86A22A-30	M21	SWT22A18A-75	M20	T10-14F	B34	TMH271SS	D4	TP14-14	B15
SWCB19A	M28	SWT22A19A	M19	T10-38	B14	TMH272	D4	TP14-2F	B39
SWCB20A	M28	SWT22A19A-30	M21	T10-516	B14	TMH272SS	D4	TP14-2Z	B41
SWCB22A	M28	SWT22A19A-75	M20	T10-6	B14	TMH289	D4	TP14-38	B15
SWCB24A	M28	SWT22A20A	M19	T10-6F	B34	TMH294	D4	TP14-4	B15
SWCB86A	M28	SWT22A20A-75	M20	T10-8	B14	TMH294SS	D4	TP14-516	B15
SWHRH18A-3CH	M23	SWT22A21A	M19	T10-8F	B34	TMH295	D4	TP14-6	B15
SWHRH18A-5CH	M23	SWT22A22A	M19	T14-10	B14	TMH295SS	D4	TP14-6F	B39
SWHRH19A-3CH	M23	SWT24A18A-75	M20	T14-10F	B34	TMH322SS	D4	TP14-6LF	B42
SWHRH19A-5CH	M23	SWT24A19A-75	M20	T14-14	B14	TMH332	C113, D4	TP14-6Z	B41
SWHRH20A-3CH	M23	SWT24A20A	M19	T14-14F	B34	TMH69	D4	TP14-8	B15
SWHRH20A-5CH	M23	SWT24A20A-75	M20	T14-38	B14	TMH69SS	D4	TP14-8F	B39
SWHRH21A-3CH	M23	SWT24A21A	M19	T14-4	B14	TMHG-42	E20	TP14-8LF	B42
SWHRH21A-5CH	M23	SWT24A22A	M19	T14-516	B14	TMHG-92	E20	TP14-8Z	B41
SWHRH22A-3CH	M23	SWT24A24A	M19	T14-6	B14	TN10-10	B16	TP16-10	B15
SWHRH22A-5CH	M23	SWT86A20A	M19	T14-6F	B34	TN10-10F	B37	TP16-10F	B39
SWHRH24A-3CH	M23	SWT86A20A-75	M20	T14-8	B14	TN10-14	B16	TP16-10LF	B42
SWHRH24A-5CH	M23	SWT86A21A	M19	T14-8F	B34	TN10-14F	B37	TP16-10Z	B41
SWHRH86A-3CH	M23	SWT86A21A-75	M20	T18-10	B14	TN10-38	B16	TP16-14	B15
SWHRH86A-5CH	M23	SWT86A22A	M19	T18-10F	B34	TN10-516	B16	TP16-2F	B39
SWL18A	M26	SWT86A22A-75	M20	T18-14	B14	TN10-6	B16	TP16-2Z	B41
SWL19A	M26	SWT86A24A	M19	T18-14F	B34	TN10-6F	B37	TP16-38	B15
SWL20A	M26	SWT86A86A	M19	T18-38	B14	TN10-8	B16	TP16-4	B15
SWL21A	M26	SWWH19A-5	M24	T18-4	B14	TN10-8F	B37	TP16-6	B15
SWL22A	M26	SWWH19A-7	M24	T18-516	B14	TN14-10	B16	TP16-6F	B39
SWL24A	M26	SWWH20A-5	M24	T18-6	B14	TN14-10F	B37	TP16-6LF	B42
SWL58A	M26	SWWH20A-7	M24	T18-6F	B34	TN14-14	B16	TP16-6Z	B41
SWL59A	M26	SWWH22A-5	M24	T18-8	B14	TN14-14F	B37	TP16-8	B15
SWL86A	M26	SWWH22A-7	M24	T18-8F	B34	TN14-38	B16	TP16-8F	B39
SWL90A	M26	SWWH24A-5	M24	TAD10-14M	N55	TN14-4	B16	TP16-8LF	B42
SWL91A	M26	SWWH24A-7	M24	TBPT-10	A40	TN14-516	B16	TP16-8Z	B41
SWL92A	M26	SWWH86A-5	M24	TBPT-12	A40	TN14-6	B16	TS-KD	N80
SWL93A	M26	SWWH86A-7	M24	TBPT-6	A40	TN14-6F	B37	TS-RD	N80
SWL96A	M26	SWXA20A-44N	M13	TBPT-8	A40	TN14-8	B16	TS-SQ	N80
SWOH18A-3	M22	SWXA20A-4NK8	M12	TDM177RG1	I69	TN14-8F	B37	TWT1	G16

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
TWT2	G16	UB258	D8	UCG25RS	H15	VA30-2N	A21, L7	W28K	N40
U1011	N5	UB260	D8	UCG28R	H15	VA34	A21, L7	W28VT	C9, N4, 029
U1104	N5	UB261	D8	UCG28RS	H15	VA34-2N	A21, L7	W29CRT	C9, N4
U1105	N5	UB262	D8	UCG32R	H15	VA34-4N	A21	W29VT	C9, N4, 029
U1CART	C9, N4-N5, 029	UB263	D8	UCG32RS	H15	VA40	A21, L7	W2CRT	C9, N4
U1CRT-1	C9, N4-N5, 029	UB264	D8	UCK-1UL	H9	VA40-2N	A21, L7	W2CVT	C9, N4, 029
U25ART	C9, N4-N5, 029	UB266	D8	UCK-2UL	H9	VA40-4N	A21, L7	W30CRT	C9, N4
U25RT	C9, N4-N5, 029	UB267	D8	UCK-3UL	H9	VP2828	H11	W30VT	C9, N4, 029
U26ART	C9, N4-N5, 029	UB268	D8	UCU28AC	A36	VP3030	H11	W31ART	C9, N4, 029
U26RT	C9, N4-N5, 029	UB269	D8	UDIEKITAL	N5	VP3430	H11	W31CRT	C9, N4
U27ART	C9, N4-N5, 029	UB271	D8	UDIEKITCU	N5	VP3434	H11	W31VT	C9, N4, 029
U27RT	C9, N4-N5, 029	UB275	D8	UDIEKITHYGRD	N5	VP4030	H11	W32CRT	C9, N4
U28ART	C9, N4-N5, 029	UB282	D8	UGS350ULDB	A32	VP4040	H11	W32VT	C9, N4, 029
U28RT	C9, N4-N5, 029	UB291	D8	UGSKIT2	A31	VP4440	H11	W33CRT	C9, N4
U29ART	C9, N4-N5, 029	UB293	D8	UGSKIT250	A31	VP4646	H11	W33VT	C9, N4
U29RT	C9, N4-N5, 029	UB294	D8	UGSKIT8	A32	VT2525	A20, H14, L11	W34CRT	C9, N4
U2CABT	C9, N4-N5, 029	UB300	D8	UH14-3	L13	VT2825	A20, H14, L11	W34VT	C9, N4, 029
U2CRT	C9, N4-N5, 029	UB302	D8	UH15-3	L13	VT2828	A20, H14, L11	W36CRT	C9, N4
U30ART	C9, N4-N5, 029	UB306	D8	UH15-5	L13	VT2C2C	A20, H14, L11	W36RT	C9, N4, 029
U30RT	C9, N4-N5, 029	UB310	D8	UH16-3	L13	VT3025	A20, H14, L11	W3CRT	C9, N4, 029
U31ART	C9, N4-N5, 029	UB311	D8	UH16-5	L13	VT3030	A20, H14, L11	W4CRT	C9, N4
U31RT	C9, N4-N5, 029	UB314	D8	UH17-3	L13	VT3425	A20, H14, L11	W4CVT	C9, N4, 029
U32ART	C9, N4-N5, 029	UB315	D8	UH17-5	L13	VT3428	A20, H14, L11	W5CRT	C9, N4
U32RT	C9, N4-N5, 029	UB317	D8	UH18-3	L13	VT3430	A20, H14, L11	W5CVT	C9, N4, 029
U34ART	C9, N4-N5, 029	UB318	D8	UH18-5	L13	VT3434	A20, H14, L11	W660	C9, N4, 029
U34RT	C9, N4-N5, 029	UB319	D8	UH19-3	L13	VT4040	A20, H14, L11	W8CRT	C9, N4
U36ART	C9, N4-N5, 029	UB328	D8	UH19-5	L13	VT4425	A20, H14, L11	W8CVT	C9, N4, 029
U36RT	C9, N4-N5, 029	UB336	D8	UH20-3	L13	VT4428	A20, H14, L11	WABAG	J13
U38XRT	C9, N4, 029	UB337	D8	UH20-5	L13	VT4834	A20, H14, L11	WAD336-15	J14
U39ART-2	C9, N4-N5, 029	UB344	D8	UH22-5	L13	VVA2	A21	WAD336-29	J14
U39RT	C9, N4-N5, 029	UB354	D8	UHG14A-3	L29	VVA25	A21	WAD336-35	J14
U3CRT	C9, N4, 029	UB357	D8	UHG15A-3	L29	VVA28	A21, L7	WAD336S	J14
U44XRT	C9, N4, 029	UB358	D8	UHG15A-5	L29	VVA28-2N	A21, L7	WAD477-15	J14
U4CABT	C9, N4-N5, 029	UB383	D8	UHG17A-3	L29	VVA30	A21, L7	WAD477-29	J14
U4CRT	C9, N4-N5, 029	UB384	D8	UHG17A-5	L29	VVA30-2N	A21, L7	WAD477-35	J14
U5CRT	C9, N4-N5, 029	UB390	D8	UHG18A-3	L29	VVA34	A21, L7	WAD477S	J14
U6CABT	C9, N4-N5, 029	UB392	D8	UHG18A-5	L29	VVA34-2N	A21, L7	WAD556-15	J14
U8CABT	C9, N4, 029	UB399	D8	UHG19A-3	L29	VVA34-4N	A21, L7	WAD556-29	J14
U8CRT	C9, N4, 029	UB400	D8	UHG20A-3	L29	VVA40	A21, L7	WAD556-35	J14
U997	N5	UB416	D8	UHG20A-5	L29	VVA40-2N	A21, L7	WAD556S	J14
UB101	D8	UB422	D8	UHG21A-3	L29	VVA40-4N	A21, L7	WAS14A-2N	L31
UB1027	D8	UB425	D8	UHG22A-5	L29	VYFT3428CCP	K55	WAS15A-2N	L31
UB1028	D8	UB436	D8	UHG24A-3	L29	VYFT3428CCR	K55	WAS15A-34N	L31
UB1029	D8	UB437	D8	UHG24A-5	L29	VYFT3434CCP	K55	WAS16A-2N	L31
UB1030	D8	UB464	D8	UHKR11A-3	L29	VYFT3434CCR	K55	WAS16A-34N	L31
UB1031	D8	UB540	D8	UHKR11A-5	L29	VYFT3934CCP	K55	WAS17A-2N	L31
UB1032	D8	UC	N5	UHKR13A-3	L29	VYFT3934CCR	K55	WAS17A-34N	L31
UB1033	D8	UC25R2R	H15	UHKR13A-5	L29	VYFT4434CCP	K55	WAS18A-2N	L31
UB104	D8	UC25R2RS	H15	UHKR14A-3	L29	VYFT4434CCR	K55	WAS18A-34N	L31
UB105	D8	UC2834	H12	UHKR14A-5	L29	W-28K	N22	WAS18A-44N	L31
UB106	D8	UC28R	H15	UHKR16A-3	L29	W-687	N22	WAS19A-2N	L31
UB107	D8	UC28RS	H15	UHKR16A-5	L29	W-702	N22	WAS19A-34N	L31
UB124	D8	UC2W28-L	H9	UHR13-3	L13	W-BG	N22	WAS19A-44N	L31
UB178	D8	UC2W30	H12	UHR13-5	L13	W161	C9, N4, 029	WAS20A-2N	L31
UB187	D8	UC3040	H12	UHR15-3	L13	W162	C9, N4, 029	WAS20A-34N	L31
UB199	D8	UC32R	H15	UHR15-5	L13	W163	C9, N4, 029	WAS20A-44N	L31
UB204	D8	UC32RS	H15	UHR17-3	L13	W166	C9, N4, 029	WAS21A-44N	L31
UB222	D8	UC33R	H15	UHR17-5	L13	W1CRT	C9, N4	WAS22A-44N	L31
UB224	D8	UC3444	H12	UO	N5	W1CVT	C9, N4, 029	WAS24A-44N	L31
UB226	D8	UC4W28	H12	UP34R	H65	W239	C9, N4, 029	WAS86A-44N	L31
UB230	D8	UC4W28CONKIT	H16	UP45R	H65	W241	C9, N4, 029	WASC14A2N	L32
UB232	D8	UC6W25	H12	UP45R36R	H65	W245	C9, N4, 029	WASC15A2N	L32
UB236	D8	UC6W25CONKIT	H16	UW25R	H11	W25CRT	C9, N4	WASC15A34N	L32
UB242	D8	UC8W26-L	H9	UW2R	H11	W25VT	C9, N4, 029	WASC16A2N	L32
UB244	D8	UCCOVER1	H16	VA25	A21, L7	W26CRT	C9, N4	WASC16A34N	L32
UB249	D8	UCCOVER1BOX25	H16	VA28	A21, L7	W26VT	C9, N4, 029	WASC17A34N	L32
UB254	D8	UCG25R	H15	VA28-2N	A21, L7	W27CRT	C9, N4	WASC18A34N	L32
UB256	D8	UCG25R2R	H15	VA2C	A21, L7	W27VT	C9, N4, 029	WASC18A44N	L32
UB257	D8	UCG25R2RS	H15	VA30	A21, L7	W28CRT	C9, N4	WASC19A2N	L32

Alpha-Numeric Index

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
WASC19A34N	L32	WCY 65 PB	J11	WCY74	J7	WS20A	M15	WTCC	J13
WASC19A44N	L32	WCY100	J8	WCY75	J7	WS21A	M15	WTCK	J10, J13
WASC20A2N	L32	WCY101	J8	WCY76	J7	WS22A	M15	WTHRB-1S	J13
WASC20A34N	L32	WCY102	J8	WCY77	J7	WS24A	M15	WTHRB1S	J10
WASC20A44N	L32	WCY103	J8	WCY78	J7	WS58A	M15	WTHY-1S	J13
WASC21A2N	L32	WCY104	J8	WCY79	J7	WS59A	M15	WTHY1S	J10
WASC21A34N	L32	WCY105	J8	WCY80	J7	WS86A	M15	WTOCBR	J10, J13
WASC21A44N	L32	WCY106	J8	WCY81	J7	WS90A	M15	WTOCY	J10, J13
WASC22A2N	L32	WCY107	J8	WCY82	J7	WS91A	M15	WTRB	J13
WASC22A34N	L32	WCY108	J8	WCY83	J7	WS92A	M15	WTRBK	J13
WASC22A44N	L32	WCY109	J8	WCY84	J7	WS94A	M15	WTRBKNHS	J13
WASC24A34N	L32	WCY110	J8	WCY85	J7	WS96A	M15	WTRBKNHSBAG	J13
WASC24A44N	L32	WCY111	J8	WCY86	J7	WSA21A-34N	L31	WTRBWABAG	J13
WASC86A44N	L32	WCY112	J8	WCY87	J7	WSL1	J9	WTRBYK	J13
WCAB30R-2N	J11	WCY113	J8	WCY88	J7	WSL10	J9	WTRBYKNHS	J13
WCAB30R-4N	J11	WCY114	J8	WCY89	J7	WSL11	J9	WTRBYKNHSBAG	J13
WCAY39R-2N	J11	WCY115	J8	WCY90	J7	WSL12	J9	WTRBYWABAG	J13
WCAY39R-4N	J11	WCY116	J8	WCY91	J7	WSL13	J9	WTY	J13
WCAY49R-2N	J11	WCY117	J8	WCY92	J7	WSL14	J9	WTYK	J13
WCAY49R-4N	J11	WCY118	J8	WCY93	J7	WSL2	J9	WTYKNHS	J13
WCB 11 PB	J11	WCY119	J8	WCY94	J7	WSL3	J9	WTYKNHSBAG	J13
WCB10	J6	WCY120	J8	WCY95	J7	WSL4	J9	WTYWABAG	J13
WCB11	J6	WCY121	J8	WCY96	J7	WSL5	J9	X161	N18
WCB12	J6	WCY122	J8	WCY97	J7	WSL6	J9	X241	N18
WCB13	J6	WCY123	J8	WCY98	J7	WSL7	J9	X245	N18
WCB14	J6	WCY124	J8	WCY99	J7	WSL8	J9	X247	N18
WCB15	J6	WCY125	J8	WDA8300	N26	WSL9	J9	X249	N18
WCB16	J6	WCY126	J8	WDC4500	N26	WSLB15A	M14	X660	N18
WCB17	J6	WCY127	J8	WDIETREE	N22, N41	WSLB16A	M14	X840	N18
WCB18	J6	WCY128	J8	WG19A	L33	WSLB17A	M14	X8CART	C9, N4, O29
WCB19	J6	WCY129	J8	WG86A	L33	WSLB18A	M14	XA15A-4N	L25
WCB20	J6	WCY130	J8	WHHWB	J12	WSLB19A	M14	XA16A-4N	L25
WCB21	J6	WCY131	J8	WHSCWH	J12	WSLB20A	M14	XA18-4N	L4
WCB22	J6	WCY132	J8	WHSGB	J12	WSLB21A	M14	XA18A-4N	L25
WCB23	J6	WCY133	J8	WHSPBC	J12	WSLB22A	M14	XA19-4N	L4
WCB24	J6	WCY134	J8	WHSSADP	J12	WSLB24A	M14	XA19A-4N	L25
WCB25	J6	WCY135	J8	WHSTA	J12	WSLB55A	M14	XA20-4N	L4
WCB26	J6	WCY136	J8	WHSWB	J12	WSLB56A	M14	XA20A-4N	L25
WCB27	J6	WCY137	J8	WHSWHADP	J12	WSLB57A	M14	XA21-4N	L4
WCB28	J6	WCY138	J8	WIREMIKE	N25, N30-N31, N46	WSLB58A	M14	XA21A-4N	L25
WCB40	J6	WCY139	J8	WLB15A	M27	WSLB59A	M14	XA22-4N	L4
WCB41	J6	WCY140	J8	WLB16A	M27	WSLB86A	M14	XA22A-4N	L25
WCB42	J6	WCY145	J8	WLB17A	M27	WSLB90A	M14	XA24A-4N	L25
WCB43	J6	WCY48	J6	WLB18A	M27	WSLB91A	M14	XBG	N18
WCB44	J6	WCY49	J6	WLB19A	M27	WSLB92A	M14	XNBG	N18
WCB45	J6	WCY50	J6	WLB20A	M27	WSLB94A	M14	XOH25	N18
WCB46	J6	WCY51	J6	WLB21A	M27	WSLB96A	M14	XP1818	L12
WCB47	J6	WCY52	J7	WLB22A	M27	WSM1	J9	XP2222	L12
WCB30R-4N	J11	WCY53	J7	WLB24A	M27	WSM10	J9	Y-11	K62
WCBY39R-4N	J11	WCY54	J7	WLB55A	M27	WSM11	J9	Y-15	K62
WCBY49R-4N	J11	WCY55	J7	WLB56A	M27	WSM2	J9	Y-22.5	K62
WCCB	J5	WCY56	J7	WLB57A	M27	WSM3	J9	Y-25	K62
WCCLY	J5	WCY57	J7	WLB58A	M27	WSM4	J9	Y-37.5	K62
WCCR	J5	WCY58	J7	WLB59A	M27	WSM5	J9	Y-7.5	K62
WCCSY	J5	WCY59	J7	WLB86A	M27	WSM6	J9	Y-S0	K62
WCHAWAS	J12	WCY60	J7	WLB90A	M27	WSM7	J9	Y10-22	N7
WCR29	J6	WCY61	J7	WLB91A	M27	WSM8	J9	Y10AC9	N67
WCR30	J6	WCY62	J7	WLB92A	M27	WSM9	J9	Y10AC9OEM	N67
WCR31	J6	WCY63	J7	WLB94A	M27	WSS1	J9	Y10D	N6
WCR32	J6	WCY64	J7	WLB96A	M27	WSS2	J9	Y1MRKIT	N13
WCR33	J6	WCY65	J7	WPBBN Box 25	J5	WT2B2RBYK	J13	Y1MRTCKIT	N13
WCR34	J6	WCY66	J7	WPBRN Box 25	J5	WT2B2RBYWABAG	J13	Y1MRTCKIT	N13
WCR35	J6	WCY67	J7	WPBYN Box 25	J5	WT2BRBYK	J13	Y281CR	C84
WCR36	J6	WCY68	J7	WS14A	M15	WT2BRBYWABAG	J13	Y2825R	C84
WCR37	J6	WCY69	J7	WS15A	M15	WTB	J10, J13	Y2826R	C84
WCY 53 PB	J11	WCY70	J7	WS16A	M15	WTBASY1	J10	Y2827R	C84
WCY 54 PB	J11	WCY71	J7	WS17A	M15	WTBGBW	J13	Y282CR	C84
WCY 63 PB	J11	WCY72	J7	WS18A	M15	WTBGBWRBYK	J13	Y284CR	C84
WCY 64 PB	J11	WCY73	J7	WS19A	M15	WTBNHS	J13	Y284WR	C84

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
Y286CR	C84	YA1C2TC14	C37	YA26L-2TC14E1	C31	YA29-2LH91	H39	YA30A1	C115
Y2928R	C84	YA1C2TC14E2	C37	YA26L-2TC14E2	C31	YA29-2LN	C32	YA30A1N131T12E	C80
Y29BH	N45	YA1C2TC38	C37	YA26L-2TC38	C31	YA29-LB	C51	YA30A3	C116
Y29NC	N53	YA1CA1	C115	YA26L-BOX	C18	YA292N	C37	YA30A5	C116
Y3025R	C84	YA1CL-2TC14	C31	YA26L2-BOX	C18	YA292NU	C15	YA30A6	C115
Y3026R	C84	YA1CL-2TC14E2	C31	YA26L2NT14	C34	YA292TC38	C37	YA30A6N100T38E	C80
Y3027R	C84	YA1CL-2TC38	C31	YA26L2NT14E1	C34	YA29A1	C115	YA30A9N100T516E	C80
Y3028R	C84	YA1CL-BOX	C18	YA26L6-BOX	C18	YA29A3	C116	YA30L	C19
Y302CR	C84	YA1CL2	C18	YA26L60	C18	YA29A5	C116	YA30L-2TC-38	C32
Y304CR	C84	YA1CL2NT14	C34	YA26LN50T14E	C80	YA29L-2TC38	C32	YA30L-TC12-FX	C45
Y3126R	C84	YA1CL2NT14E2	C34	YA26LNT10	C21	YA29L-BOX	C19	YA30L-TC34-FX	C45
Y3128R	C84	YA1CL4-BOX	C18	YA26LNT38	C21	YA29L2	C19	YA30L-TC38-FX	C45
Y3129R	C84	YA1CL6-BOX	C18	YA26LNT516	C18, C21	YA29L2NT38	C35	YA30L-TC516-FX	C45
Y3425R	C84	YA1CLNT10	C21	YA26N	C25	YA29L2NT38E16	C35	YA30L-TC58-FX	C45
Y3426R	C84	YA1CLNT14	C21	YA27	C25	YA29L4	C19	YA30L1	C19
Y3427R	C84	YA1CN	C24	YA27-2LN	C31	YA29L7	C19	YA30L24	C19
Y3428R	C84	YA1CTC10	C24	YA27-LB	C51	YA29L9TC38	C22	YA30L24N100T38E	C80
Y3429R	C84	YA25	C24	YA272N	C37	YA29LENT516	C22	YA30L27	C19
Y342CR	C84	YA25-2L	C31	YA272NU	C15	YA29LNT38	C19, C22	YA30L28	C19
Y3430R	C84	YA25-2LN	C31	YA272TC14E2	C37	YA29LTC78	C19	YA30L7	C19
Y3431R	C84	YA25-LB	C51	YA272TC38	C37	YA2C	C24	YA30LNT14	C22
Y3432R	C84	YA252N	C37	YA27A1	C115	YA2C-2L	C31	YA30LNT38	C22
Y34BH	N44	YA252NTC38	C37	YA27A10S76T516E	C80	YA2C-2LN	C31	YA31	C26
Y35	N27	YA252NU	C15	YA27A3	C115	YA2C-LB	C51	YA31-2LH90	H39
Y35-16	N28	YA252TC14	C37	YA27A5	C116	YA2C2N	C37	YA31-2LN	C32
Y35-2	N27	YA252TC14E2	C37	YA27A7	C116	YA2C2NTC38	C37	YA31-L2NTC-FX	C58
Y35/Y39 REP KIT A	N28	YA252TC38	C37	YA27L-2TC14E2	C31	YA2C2NU	C14	YA31-L2NTC38-FX	C58
Y35B	N42	YA252TC516	C37	YA27L-2TC38	C31	YA2C2TC14	C37	YA31-L2TC12-FX	C58
Y35BH	N42	YA25A1	C115	YA27L-BOX	C18	YA2C2TC14E2	C37	YA31-L2TC38-FX	C58
Y35BH-4	N42	YA25A1S60T516E	C80	YA27L2NT14	C35	YA2C2TC38	C37	YA31-LB	C51
Y35H	N42	YA25A3	C115	YA27L2NT38	C35	YA2C2TC38E2	C37	YA31-TC12-FXB	C55
Y35P3	N28	YA25A3N69T38E	C80	YA27L3	C18	YA2C2TC38E6	C37	YA312N	C38
Y39	N29	YA25A5	C116	YA27L4-BOX	C18	YA2C2TC516E2	C37	YA312N-FXB	C64
Y3934R	C84	YA25A7	C116	YA27LENT516	C35	YA2CA1	C115	YA312NU	C15
Y3936R	C84	YA25A9	C115	YA27LNT14	C22	YA2CA1S91T516E	C80	YA312TC14E2	C38
Y39BH	N43	YA25L-2TC14	C31	YA27LNT38	C18, C22	YA2CA3	C115	YA312TC38	C38
Y4439R	C84	YA25L-2TC14E1	C31	YA27LNT516	C22	YA2CA5	C115	YA312TC38-FXB	C64
Y45	N50	YA25L-2TC14E2	C31	YA28	C25	YA2CA5S53T14E	C80	YA31A1	C115
Y46	N51	YA25L-2TC38	C31	YA28-2LH114	H39	YA2CA9	C116	YA31A11N100T516E	C80
Y46-2	N51	YA25L-BOX	C18	YA28-2LH115	H39	YA2CL-2TC14	C31	YA31A3	C116
Y46C	N51	YA25L2-BOX	C18	YA28-2LN	C32	YA2CL-2TC14E1	C31	YA31A5	C116
Y4PC834	N33	YA25L2NT14	C34	YA28-LB	C51	YA2CL-2TC14E2	C31	YA31A9N100T38E	C80
Y4PC834MBH	N49	YA25L2NT14E1	C34	YA282N	C37	YA2CL-2TC38	C31	YA31L	C19
Y500CT-HS	N26	YA25L4-BOX	C18	YA282NTC38	C37	YA2CL-2TC516	C31	YA31L-2NTC516	C32
Y60BHJ	N52	YA25L6-BOX	C18	YA282NU	C15	YA2CL-BOX	C18	YA31L-2TC12	C32
Y60BHJUD	N52	YA25LN50T14E	C80	YA282TC14E2	C37	YA2CL2-BOX	C18	YA31L-2TC14E2	C32
Y644HSCASE	N31	YA25LN64T516E	C80	YA282TC38	C37	YA2CL2NT14	C34	YA31L-2TC38	C32
Y644HSXT	N31	YA25LNT10	C21	YA28A1	C115	YA2CL2NT14E1	C34	YA31L-NT12-FX	C46
Y644MBH	N47	YA25LNT14	C21	YA28A14N100T516E	C80	YA2CL2NT14E2	C34	YA31L-TC12-FX	C46
Y750BHXT	N46	YA25N	C25	YA28A1N100T38E	C80	YA2CL4-BOX	C18	YA31L-TC14-FX	C46
Y750CBHXT	N46	YA25TC10	C24	YA28A3	C115	YA2CL6-BOX	C18	YA31L-TC34-FX	C46
Y750CHSXT	N30	YA25TC38	C24	YA28A5	C116	YA2CLNT10	C21	YA31L-TC38-FX	C46
Y750HSCASE	N30	YA26	C25	YA28A7	C116	YA2CLNT14	C21	YA31L-TC516-FX	C46
Y750HSXT	N30	YA26-2L	C31	YA28L-2NTC516	C32	YA2CLNT516	C21	YA31L-TC58-FX	C46
Y81KFT	N32	YA26-2LH89	H39	YA28L-2TC14E1	C32	YA2CN	C24	YA31L11	C19
Y81KFTMBH	N48	YA26-2LN	C31	YA28L-2TC14E2	C32	YA2CTC10	C24	YA31L2NT38	C35
Y8MRB-1	N9	YA26-LB	C51	YA28L-2TC38	C32	YA2CTC14	C24	YA31L2NT38E16	C35
YA-A-KIT1	C117	YA262N	C37	YA28L-2TC38E2	C32	YA30	C26	YA31L2NT38FX	C60
YA-AKIT2	C117	YA262NU	C15	YA28L-BOX	C18	YA30-2LH85	H39	YA31L36	C19
YA-AKIT3	C117	YA262TC14	C37	YA28L2-BOX	C18	YA30-2LN	C32	YA31L7	C19
YA10A-TN	C114	YA262TC14E2	C37	YA28L2NT14	C35	YA30-L2NTC-FX	C58	YA31LNT12	C22
YA12A-TN	C114	YA262TC38	C37	YA28L3	C18	YA30-L2TC12-FX	C58	YA31LNT12FX	C47
YA15ALKIT	C16	YA26A1	C115	YA28L4-BOX	C18	YA30-L2TC38-FX	C58	YA31LNT38	C19, C22
YA1C	C24	YA26A13N100T516E	C80	YA28L56	C18	YA30-LB	C51	YA32	C26
YA1C-2L	C31	YA26A3	C116	YA28LNT14	C22	YA30-TC12-FXB	C55	YA32-2L	C32
YA1C-2LN	C31	YA26A5	C116	YA28LNT38	C18, C22	YA302N	C38	YA32-2LN	C32
YA1C-LB	C51	YA26A6	C115	YA28LNT516	C22	YA302N-FXB	C64	YA32-L2NTC-FX	C58
YA1C2N	C37	YA26A6N100T38E	C80	YA28TC38	C25	YA302NU	C15	YA32-L2TC38-FX	C58
YA1C2NU	C15	YA26L-2TC14	C31	YA29	C25	YA302TC38	C38	YA32-LB	C51

Reference

BURNDY®

Alpha-Numeric Index

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
YA32-TC12-FXB	C55	YA34L37	C19	YA38L-TC38-FX	C46	YA402N	C38	YA472N	C38
YA322N	C38	YA34L6	C19	YA38L-TC516-FX	C46	YA402N-FXB	C65	YA472NU	C15
YA322N-FXB	C64	YA34L6N131T12E	C80	YA38L-TC58-FX	C46	YA402NU	C15	YA47N	C26, C43
YA322NU	C15	YA34L8	C19	YA38L2ENT38FX	C60	YA40L	C20	YA48	C26
YA322TC38	C38	YA34L9	C19	YA38L2NNTFX	C60	YA40L-2TC38	C33	YA482N	C38
YA322TC38-FXB	C64	YA34LNT12	C22	YA38L2NT38FX	C60	YA40L-TC12-FX	C46	YA482NU	C15
YA32A1	C115	YA34LNT38	C22	YA38LNT12FX	C48	YA40L-TC38-FX	C46	YA484N	C43
YA32A5	C116	YA34N	C26	YA38LNTM20FX	C48	YA40L-TC516-FX	C46	YA4864N	C43
YA32A8N106T516E	C80	YA35	C26	YA38N	C26	YA40L-TC58-FX	C46	YA48A3	C116
YA32L	C19	YA35-2L	C32	YA39	C26	YA40L2NNTFX	C60	YA48L	C20, C79
YA32L-2TC38	C32	YA35-2LN	C32	YA39-2L	C33	YA41	C26	YA48N	C26
YA32L-2TC38E5	C32	YA352N	C38	YA39-2LN	C33	YA41-2L	C33	YA4C	C23
YA32L-TC12-FX	C46	YA35L	C19	YA39-L2NTC-FX	C58	YA412N	C38	YA4C-2L	C31
YA32L-TC38-FX	C46	YA35N	C26	YA39-LB	C51	YA41L	C20	YA4C-2LN	C31
YA32L-TC58-FX	C46	YA36	C26	YA392LNN131T12E	C80	YA41N	C26	YA4C-LB	C51
YA32L1	C19	YA36-2LN	C32	YA392N	C38	YA44	C26	YA4C2N	C36
YA32L14	C19	YA36-L2NTC-FX	C58	YA392NT38	C38	YA44-2L	C33	YA4C2NU	C14
YA32L2NT38FX	C60	YA36-L2TC38-FX	C58	YA392NU	C15	YA44-2LN	C33	YA4C2TC14	C36
YA32LNT12	C22	YA36-LB	C51	YA392TC38	C38	YA44-L2NNT-FX	C58	YA4C2TC14E2	C36
YA32LNT38	C22	YA36-TC12-FXB	C55	YA39A1	C115	YA44-L2NT38-FX	C58	YA4C2TC38	C36
YA32LNT38FX	C48	YA36-TC58-FXB	C55	YA39A1N131TD12E	C81	YA44-L2NTC-FX	C58	YA4CA1	C115
YA32LNT516FX	C48	YA362MFXB	C64	YA39A3	C115	YA44-L2TC12-FX	C58	YA4CA3	C115
YA32LTC78	C19	YA362N	C38	YA39A5	C116	YA44-L2TC12E3-FX	C58	YA4CA6	C115
YA32N	C26	YA362NU	C15	YA39A5N131TD12E	C81	YA44-L2TC38-FX	C58	YA4CL-2TC14	C31
YA33	C26	YA362TC38	C38	YA39A7	C116	YA44-L2TC58-FX	C58	YA4CL-2TC14E1	C31
YA33-2LN	C32	YA36A1	C115	YA39AM2	C116	YA44-LB	C51	YA4CL-2TC14E2	C31
YA332N	C38	YA36A3	C116	YA39L	C19	YA44-TC58-FXB	C55	YA4CL-2TC38	C31
YA33L	C19	YA36A3N131TD12E	C81	YA39L-2TC12E3	C33	YA442N	C38	YA4CL-2TC516	C31
YA33N	C26	YA36A5	C116	YA39L-2TC38	C33	YA442N-FXB	C65	YA4CL-BOX	C18
YA34	C26	YA36A9N131TD12E	C81	YA39L-2TC58	C33	YA442NU	C15	YA4CL1-BOX	C18
YA34-2L	C32	YA36L	C19	YA39L2	C19	YA442TC38	C38	YA4CL3-BOX	C18
YA34-2LH110	H39	YA36L-2TC38	C32	YA39L2NT12E1	C35	YA442TC38-FXB	C65	YA4CL4-BOX	C18
YA34-2LH111	H39	YA36L-TC12-FX	C46	YA39L2NT38	C35	YA444N	C43	YA4CL6-BOX	C18
YA34-2LN	C32	YA36L-TC58-FX	C46	YA39L2NT38E16	C35	YA444NU	C15	YA4CLNT10	C21
YA34-L2NTC38-FX	C58	YA36L11	C19	YA39L6	C19	YA44A1	C115	YA4CN	C24
YA34-L2NTC-FX	C58	YA36L2NNT	C35	YA39L6N131T12E	C80	YA44A3	C116	YA4CTC10	C23
YA34-L2NTC38-FX	C58	YA36L2NT38FX	C60	YA39L9	C19	YA44L	C20	YA4CTC38	C24
YA34-L2TC12-FX	C58	YA36LNT12	C22	YA39LNT12	C22	YA44L-2TC12	C33	YA5C	C23
YA34-L2TC38-FX	C58	YA36LNT38	C22	YA39LNT38	C19, C22	YA44L-TC12-FX	C46	YA5C-2L	C30
YA34-L2TC516-FX	C58	YA36LTC78	C19	YA39LNT58	C22	YA44L-TC58-FX	C46	YA5C-LB	C51
YA34-LB	C51	YA36N	C26	YA39N	C26	YA44L2	C20	YA5C2N	C36
YA34-TC12-FXB	C55	YA37	C26	YA3C	C24	YA44L23	C20	YA5CL-BOX	C17
YA342LNN119T12E	C80	YA37-2L	C32	YA3C-2L	C31	YA44L2NNTFX	C60	YA5CN	C23
YA342LNN131T12E	C80	YA37-2LN	C32	YA3C-LB	C51	YA44L2NT38FX	C60	YA6C	C23
YA342N	C38	YA372N	C38	YA3C2N	C36	YA44LNT12FX	C48	YA6C-2L	C30
YA342N-FXB	C64	YA37L	C19	YA3C2N-FXB	C63	YA44LNT38FX	C48	YA6C-2L51	C30
YA342NU	C15	YA37L1	C19	YA3C2NU	C14	YA44N	C26	YA6C-2L52	C30
YA342TC14E2	C38	YA37N	C26	YA3C2TC14	C36	YA45	C26	YA6C-2LN	C30
YA342TC38	C38	YA38	C26	YA3C2TC14E2	C36	YA452N	C38	YA6C2N	C36
YA342TC38-FXB	C64	YA38-2L	C33	YA3C2TC38	C36	YA452NU	C15	YA6C2NU	C14
YA34A1	C115	YA38-2LN	C33	YA3C2TC38-FXB	C63	YA4532N	C38	YA6C2TC14	C36
YA34A3	C116	YA38-L2NNT-FX	C58	YA3C2TC38E2	C36	YA453L	C20	YA6C2TC14E1	C36
YA34A3N131T12E	C81	YA38-L2NT38-FX	C58	YA3C2TC516-FXB	C63	YA454N	C43	YA6C2TC14E2	C36
YA34A5	C116	YA38-L2NTC-FX	C58	YA3CL	C18	YA454NU	C15	YA6C2TC38	C36
YA34A7N131T12E	C81	YA38-L2TC12-FX	C58	YA3CL-2TC14	C31	YA45A5	C116	YA6C2TC38E2	C36
YA34A8N131T38E	C81	YA38-L2TC38-FX	C58	YA3CL-2TC38	C31	YA45L	C20	YA6C2TC38E6	C36
YA34L	C19	YA38-L2TC516-FX	C58	YA3CLNT14	C21	YA45L2NT38FX	C60	YA6CA1	C114
YA34L-2TC12	C32	YA38-LB	C51	YA3CLNT516	C21	YA46	C26	YA6CA3	C114
YA34L-2TC14E2	C32	YA38-TC58-FXB	C55	YA3CN	C24	YA46-TC58-FXB	C55	YA6CL-2TC10	C30
YA34L-2TC38	C32	YA382-FXBG2	C64	YA3CTC14	C24	YA462N	C38	YA6CL-2TC14	C30
YA34L-TC12-FX	C46	YA382-FXBG3	C64	YA3CTC38	C24	YA462N-FXB	C65	YA6CL-2TC14E	C30
YA34L-TC38-FX	C46	YA382N	C38	YA40	C26	YA462NU	C15	YA6CL-2TC14E1	C30
YA34L-TC516-FX	C46	YA382N-FXB	C64	YA40-2L	C33	YA464N	C43	YA6CL-2TC14E2	C30
YA34L-TC58-FX	C46	YA382TC38	C38	YA40-2LN	C33	YA464NU	C15	YA6CL-2TC38	C30
YA34L20	C19	YA382TC38-FXB	C64	YA40-L2NNT-FX	C58	YA46A3	C116	YA6CL-2TC516	C30
YA34L2NT38	C35	YA38L	C19	YA40-L2NTC-FX	C58	YA46A5	C116	YA6CL-2TC516E2	C30
YA34L2NT38E16	C35	YA38L-2TC12	C33	YA40-L2TC38-FX	C58	YA46L	C20	YA6CL-BOX	C17
YA34L2NT38FX	C60	YA38L-2TC38	C33	YA40-LB	C51	YA46N	C26	YA6CL1-BOX	C17
YA34L2NTE1	C35	YA38L-TC12-FX	C46	YA40-TC58-FXB	C55	YA47	C26	YA6CL3-BOX	C17

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
YA6CL4-BOX	C17	YAD14-38M	B14, N55	YAE14-N1	B4	YAE18N24	B18	YAE22Z3 BOX	B40
YA6CL6-BOX	C17	YAD14-4	B14	YAE14-N2	B4	YAE18N24 BOX	B18	YAE22Z3M	N55
YA6CLNT6	C21	YAD14-4M	B14, N55	YAE14-N3	B4	YAE18N24M	B18	YAES10-N11	B4
YA6CN	C23	YAD14-516	B14	YAE14-N4	B4	YAE18N25	B18	YAES10-N12	B4
YA6CTC10	C23	YAD14-6	B14	YAE14-N43	B4	YAE18N25M	B18, N55	YAES10-N13	B4
YA8C-2LN	C30	YAD14-6F	B34	YAE14N	B4, B18	YAE18N26	B18	YAES10-N14	B4
YA8C-L1-BOX	C44	YAD14-6M	B14, N55	YAE14N BOX	B18	YAE18N26M	B18, N55	YAES10-N56	B4
YA8C-L2-BOX	C44	YAD14-8	B14	YAE14N1	B18	YAE18N27	B18	YAES10-N57	B4
YA8C-L2TC10	C56	YAD14-8F	B34	YAE14N1 BOX	B18	YAE18N27 BOX	B18	YAES10-N58	B4
YA8C-L2TC14	C56	YAD14-8M	B14, N55	YAE14N1M	B18, N55	YAE18N27M	B18, N55	YAES10K-11	B20
YA8C-L2TC14E1	C56	YAD18-10	B14	YAE14N2	B18	YAE18N29	B18	YAES10K-11T1	B20
YA8C-L2TC14E2	C56	YAD18-10M	B14, N55	YAE14N2 BOX	B18	YAE18N29 BOX	B18	YAES10K-12	B20
YA8C-L2TC38	C56	YAD18-14	B14	YAE14N2M	B18, N55	YAE18N29M	B18, N55	YAES10K-13	B20
YA8C-L3-BOX	C44	YAD18-14F	B34	YAE14N3	B18	YAE18N2M	B18, N55	YAES10K-14	B20
YA8C-L4-BOX	C44	YAD18-14M	B14, N55	YAE14N3 BOX	B18	YAE18N3	B18	YAES10K-56	B20
YA8C-LB	C51	YAD18-38	B14	YAE14N3M	B18, N55	YAE18N3 BOX	B18	YAES10K-57	B20
YA8C-TC14-FXB	C54	YAD18-4	B14	YAE14N4	B18	YAE18N3M	B18, N55	YAES10K-58	B20
YA8C2NU	C14	YAD18-4M	B14, N55	YAE14N4 BOX	B18	YAE18N56F	B38	YAES10N11	B16
YA8C2TC14	C36	YAD18-516	B14	YAE14N43	B18	YAE18N56FM	B38, N55	YAES10N11F	B37
YA8C2TC14E2	C36	YAD18-6	B14	YAE14N43 BOX	B18	YAE18N57F	B38	YAES10N12	B16
YA8C2TC14E2-FXB	C63	YAD18-6F	B34	YAE14N43M	B18, N55	YAE18N57F BOX	B38	YAES10N12F	B37
YA8C2TC38	C36	YAD18-6M	B14, N55	YAE14N4M	B18, N55	YAE18N57FM	B38, N55	YAES10N13	B16
YA8C2TC38-FXB	C63	YAD18-8	B14	YAE14N52	B16	YAE18N60F	B38	YAES10N14	B16
YA8CA1	C114	YAD18-8F	B34	YAE14N76F	B38	YAE18N60F BOX	B38	YAES10N56	B16
YA8CA3	C114	YAD18-8M	B14, N55	YAE14N76FM	B38, N55	YAE18NM	B18, N55	YAES10N56F	B37
YA8CA3S56T14E	C80	YAE-18N24M	N55	YAE14N77F	B38	YAE18Z1	B40	YAES10N57	B16
YA8CL-2TC10	C30	YAE10-N11	B4	YAE14N77F BOX	B38	YAE18Z1 BOX	B40	YAES10N57F	B37
YA8CL-2TC10E2	C30	YAE10-N2	B4	YAE14N77FM	B38, N55	YAE18Z1M	N55	YAES14-N10	B4
YA8CL-2TC14	C30	YAE10-N3	B4	YAE14N78F	B38	YAE18Z2	B40	YAES14-N52	B4
YA8CL-2TC14E1	C30	YAE10-N4	B4	YAE14N78F BOX	B38	YAE18Z2 BOX	B40	YAES14-N53	B4
YA8CL-2TC14E2	C30	YAE10-N5	B4	YAE14N78FM	B38, N55	YAE18Z3	B40	YAES14-N54	B4
YA8CL-2TC38	C30	YAE10N	B4, B18	YAE14NM	B18, N55	YAE18Z3 BOX	B40	YAES14-N6	B4
YA8CL-BOX	C17, C44	YAE10N BOX	B18	YAE14Z2	B40	YAE18Z3M	N55	YAES14-N7	B4
YA8CL1-BOX	C17	YAE10N11	B18	YAE14Z2 BOX	B40	YAE18Z4	B40	YAES14-N8	B4
YA8CL2-BOX	C17	YAE10N11 BOX	B18	YAE14Z3	B40	YAE18Z4 BOX	B40	YAES14-N9	B4
YA8CL3-BOX	C17	YAE10N11M	B18, N55	YAE14Z3 BOX	B40	YAE18Z4M	N55	YAES14K-10	B20
YA8CL4-BOX	C17	YAE10N2	B18	YAE14Z3M	N55	YAE10N2M	B18	YAES14K-53	B20
YA8CLNT6	C21	YAE10N2M	N55	YAE14Z4	B40	YAE22-G13	B4	YAES14K-54	B20
YA8CLNT8	C21	YAE10N3	B18	YAE14Z4 BOX	B40	YAE22-G14	B4	YAES14K-6	B20
YA8CTC10	C23	YAE10N3 BOX	B18	YAE14Z4M	N55	YAE22-G15	B4	YAES14K-7	B20
YA8CTC14	C23	YAE10N3M	B18, N55	YAE18-G43	B4	YAE22-G16	B4	YAES14K-8	B20
YA8CTC38	C23	YAE10N4	B18	YAE18-N15	B4	YAE22-G18	B4	YAES14K-9	B20
YAB25-2LH70	H39	YAE10N4M	B18, N55	YAE18-N17	B4	YAE22G12	B17	YAES14N10	B16
YAB25-2LH71	H39	YAE10N5	B18	YAE18-N2	B4	YAE22G12 BOX	B17	YAES14N53	B16
YAB2C-2LH74	H39	YAE10N5 BOX	B18	YAE18-N21	B4	YAE22G13	B17	YAES14N53F	B37
YAB2C2LH75	H39	YAE10N5M	B18, N55	YAE18-N3	B4	YAE22G13 BOX	B17	YAES14N54	B16
YAB344N	C43	YAE10NM	B18, N55	YAE18-N7	B18	YAE22G13M	B17, N55	YAES14N54F	B37
YAB394N	C43	YAE12N	B18	YAE18-N7M	B18, N55	YAE22G14	B17	YAES14N55	B16
YAB4C-2LH72	H39	YAE12N BOX	B18	YAE18G43	B18	YAE22G14 BOX	B17	YAES14N6	B16
YAC-CASE	N67	YAE12N1	B18	YAE18G43 BOX	B18	YAE22G15	B17	YAES14N6F	B37
YAD10-10	B14	YAE12N1 BOX	B18	YAE18G43F	B38	YAE22G15 BOX	B17	YAES14N7	B16
YAD10-10F	B34	YAE12N1M	B18, N55	YAE18G43F BOX	B38	YAE22G16	B17	YAES14N8	B16
YAD10-14	B14	YAE12N2	B18	YAE18G43FM	B38, N55	YAE22G16 BOX	B17	YAES14N8F	B37
YAD10-14M	B14	YAE12N2 BOX	B18	YAE18G43M	B18, N55	YAE22G16M	B17, N55	YAES14N9	B16
YAD10-38	B14	YAE12N2M	B18, N55	YAE18G60FM	B38	YAE22G18	B17	YAES18-N1	B4
YAD10-38M	B14, N55	YAE12N3M	N55	YAE18N	B4, B18	YAE22G18 BOX	B17	YAES18-N2	B4
YAD10-516	B14	YAE12N7	B18	YAE18N BOX	B18	YAE22G18M	B17, N55	YAES18-N3	B4
YAD10-516M	B14, N55	YAE12N9	B18	YAE18N1	B4, B18	YAE22N65F	B38	YAES18-N4	B4
YAD10-6	B14	YAE12N9 BOX	B18	YAE18N1 BOX	B18	YAE22N65F BOX	B38	YAES18-N48	B4
YAD10-6F	B34	YAE12N9M	B18, N55	YAE18N15	B18	YAE22N65FM	B38, N55	YAES18-N49	B4
YAD10-8	B14	YAE12NM	B18, N55	YAE18N15 BOX	B18	YAE22N66F	B38	YAES18-N5	B4
YAD10-8F	B34	YAE12Z2	B40	YAE18N15M	B18	YAE22N66F BOX	B38	YAES18-N50	B4
YAD10-8M	B14, N55	YAE12Z2 BOX	B40	YAE18N17	B18	YAE22N66FM	B38, N55	YAES18K-1	B20
YAD14-10	B14	YAE12Z2M	N55	YAE18N1M	B18, N55	YAE22Z1 BOX	B40	YAES18K-2	B20
YAD14-10F	B34	YAE12Z3	B40	YAE18N2	B18	YAE22Z1M	N55	YAES18K-3	B20
YAD14-10M	B14, N55	YAE12Z3 BOX	B40	YAE18N2 BOX	B18	YAE22Z2	B40	YAES18K-4	B20
YAD14-14F	B34	YAE12Z3M	N55	YAE18N21	B18	YAE22Z2 BOX	B40	YAES18K-49	B20
YAD14-14M	B14, N55	YAE12Z4	B40	YAE18N21 BOX	B18	YAE22Z2M	N55	YAES18K-5	B20
YAD14-38	B14	YAE12Z4 BOX	B40	YAE18N21M	B18, N55	YAE22Z3	B40	YAES18K-50	B20

Alpha-Numeric Index

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
YAES18K48	B20	YAEV2C-L	B4, B28	YAG1CL-2TC38-LD	C72	YAG28LTC516FX	C49	YAG34L-2TC516-LD	C73
YAES18N1	B16	YAEV2C-L1	B4, B28	YAG1CL-2TC516-LD	C72	YAG28LTC516LD	C69	YAG34LNT516N66LD	C70
YAES18N1F	B37	YAEV2C-L2	B28	YAG1CLTC10LD	C68	YAG28LTC516N66LD	C69	YAG34LTC12FX	C50
YAES18N2	B16	YAEV2C-L3	B28	YAG1CLTC12FX	C49	YAG28LTC58LD	C69	YAG34LTC12LD	C70
YAES18N3	B16	YAEV2C-L4	B4, B28	YAG1CLTC12LD	C68	YAG29L-2NT38-LD	C72	YAG34LTC38FX	C50
YAES18N3F	B37	YAEV2C-RH	B33	YAG1CLTC14FX	C49	YAG29L-2NTC-LD	C73	YAG34LTC38LD	C70
YAES18N4	B16	YAEV2C-RH1	B33	YAG1CLTC14LD	C68	YAG29L-2TC12-LD	C73	YAG34LTC516FX	C50
YAES18N48	B16	YAEV2C-RS	B32	YAG1CLTC38FX	C49	YAG29L-2TC12E1-LD	C73	YAG34LTC516LD	C70
YAES18N49	B16	YAEV2C-RS1	B32	YAG1CLTC38LD	C68	YAG29L-2TC14-LD	C72	YAG34LTC516N66LD	C70
YAES18N5	B16	YAEV4C-H	B29	YAG1CLTC516FX	C49	YAG29L-2TC14E2-LD	C72	YAG34LTC58FX	C50
YAES18N50	B16	YAEV4C-H2	B29	YAG1CLTC516LD	C68	YAG29L-2TC38-LD	C72	YAG34LTC58LD	C70
YAEV10	B27	YAEV4C-H3	B29	YAG25L-2NTC-LD	C72	YAG29L-2TC516-LD	C72	YAG36L-2NTC-LD	C73
YAEV10 BOX	B27	YAEV4C-H4	B29	YAG25L-2TC12E1-LD	C72	YAG29LTC12FX	C50	YAG36L-2TC38-LD	C73
YAEV10-L36	B27	YAEV4C-H5	B29	YAG25L-2TC14E2-LD	C72	YAG29LTC12LD	C69	YAG36LTC12LD	C70
YAEV10-L36 BOX	B27	YAEV4C-L	B4, B28	YAG25L-2TC38-LD	C72	YAG29LTC34LD	C69	YAG36LTC38FX	C50
YAEV10-T11	B27	YAEV4C-L2	B4, B28	YAG25L-2TC516-LD	C72	YAG29LTC38FX	C50	YAG36LTC58LD	C70
YAEV10-T11 BOX	B27	YAEV4C-L3	B28	YAG25L-2TC516E2-LD	C72	YAG29LTC38LD	C69	YAG38L-2NT38-LD	C73
YAEV10-T2	B27	YAEV4C-L4	B4, B28	YAG25LTC12FX	C49	YAG29LTC516LD	C69	YAG38L-2NTC-LD	C73
YAEV10-T2 BOX	B27	YAEV4C-L5	B28	YAG25LTC12LD	C69	YAG29LTC58FX	C50	YAG38L-2TC12-LD	C70
YAEV10-T3	B27	YAEV4C-RH	B33	YAG25LTC14FX	C49	YAG2CL-2NTC-LD	C72	YAG38L-2TC38-LD	C73
YAEV10-T3 BOX	B27	YAEV4C-RH2	B33	YAG25LTC14LD	C69	YAG2CL-2TC14-LD	C71	YAG38L-2TC516-LD	C73
YAEV10-T4	B27	YAEV4C-RS	B32	YAG25LTC38FX	C49	YAG2CL-2TC14E1-LD	C71	YAG38LTC12FX	C50
YAEV10-T4 BOX	B27	YAEV4C-RS2	B32	YAG25LTC38LD	C69	YAG2CL-2TC14E2-LD	C71	YAG38LTC12LD	C70
YAEV10-T7	B27	YAEV6C-H	B29	YAG25LTC516FX	C49	YAG2CL-2TC38-LD	C71	YAG38LTC38FX	C50
YAEV10-T7 BOX	B27	YAEV6C-H1	B29	YAG25LTC516LD	C69	YAG2CL-2TC516-LD	C72	YAG38LTC38LD	C70
YAEV14	B27	YAEV6C-H10	B29	YAG26L-2NTC-LD	C72	YAG2CLTC10LD	C68	YAG38LTC516FX	C50
YAEV14 BOX	B27	YAEV6C-H2	B29	YAG26L-2TC14-LD	C72	YAG2CLTC12FX	C49	YAG38LTC516LD	C70
YAEV18	B27	YAEV6C-H4	B29	YAG26L-2TC14E2-LD	C72	YAG2CLTC12LD	C68	YAG38LTC58LD	C70
YAEV18 BOX	B27	YAEV6C-L	B28	YAG26L-2TC38-LD	C72	YAG2CLTC14FX	C49	YAG39L-2NTC-LD	C73
YAEV1C-H	B29	YAEV6C-L1	B28	YAG26L-2TC516-LD	C72	YAG2CLTC14LD	C68	YAG40L-2NNT-LD	C73
YAEV1C-H1	B29	YAEV6C-L10	B28	YAG26LTC10LD	C69	YAG2CLTC38FX	C49	YAG40L-2NTC-LD	C73
YAEV1C-H2	B29	YAEV6C-L1M	B4	YAG26LTC12FX	C49	YAG2CLTC38LD	C68	YAG40L-2TC38-LD	C73
YAEV1C-H3	B29	YAEV6C-L2	B28	YAG26LTC12LD	C69	YAG2CLTC516FX	C49	YAG40LTC12FX	C50
YAEV1C-L	B4, B28	YAEV6C-L2M	B4	YAG26LTC14FX	C49	YAG2CLTC516LD	C68	YAG40LTC12LD	C70
YAEV1C-L1	B4, B28	YAEV6C-L4	B28	YAG26LTC14LD	C69	YAG30L-2NTC-LD	C73	YAG40LTC14FX	C50
YAEV1C-L2	B28	YAEV6C-L4M	B4	YAG26LTC34LD	C69	YAG30L-2TC12-LD	C73	YAG40LTC38FX	C50
YAEV1C-L3	B4, B28	YAEV6C-LM	B4	YAG26LTC38FX	C49	YAG30L-2TC38-LD	C73	YAG40LTC38LD	C70
YAEV1C-RH	B33	YAEV6C-RH	B33	YAG26LTC38LD	C69	YAG30LTC12FX	C50	YAG40LTC516FX	C50
YAEV1C-RH2	B33	YAEV6C-RH1	B33	YAG26LTC516FX	C49	YAG30LTC34LD	C69	YAG40LTC516LD	C70
YAEV1C-RS	B32	YAEV6C-RS	B32	YAG26LTC516LD	C69	YAG30LTC38FX	C50	YAG40LTC58LD	C70
YAEV1C-RS2	B32	YAEV6C-RS1	B32	YAG26LTC58LD	C69	YAG30LTC58FX	C50	YAG44L-2NTC-LD	C73
YAEV25-H	B30	YAEV8C-H	B29	YAG27L-2NTC-LD	C72	YAG30LTC58LD	C69	YAG44L-2TC12-LD	C73
YAEV25-H1	B30	YAEV8C-H1	B29	YAG27L-2TC14-LD	C72	YAG31L-2NTC-LD	C73	YAG44L-2TC12E3-LD	C73
YAEV25-H2	B30	YAEV8C-H14	B29	YAG27L-2TC14E2-LD	C72	YAG31L-2NTC38-LD	C73	YAG44L-2TC38-LD	C73
YAEV25-H3	B30	YAEV8C-H2	B29	YAG27L-2TC38-LD	C72	YAG31L-2TC12-LD	C73	YAG44L-2TC58-LD	C73
YAEV25-H4	B30	YAEV8C-H3	B29	YAG27L-2TC516-LD	C72	YAG31L-2TC38-LD	C73	YAG44LTC12FX	C50
YAEV25-L	B4, B28	YAEV8C-H4	B29	YAG27LTC10LD	C69	YAG31LNT12LD	C69	YAG44LTC12LD	C70
YAEV25-L1	B4, B28	YAEV8C-L	B4, B28	YAG27LTC12FX	C49	YAG31LTC12FX	C50	YAG44LTC38FX	C50
YAEV25-L2	B28	YAEV8C-L BOX	B28	YAG27LTC12LD	C69	YAG31LTC12LD	C69	YAG44LTC516FX	C50
YAEV25-L3	B4, B28	YAEV8C-L1	B4, B28	YAG27LTC14FX	C49	YAG31LTC14FX	C50	YAG44LTC58LD	C70
YAEV25-L4	B28	YAEV8C-L1 BOX	B28	YAG27LTC14LD	C69	YAG31LTC14LD	C69	YAG4CL-2NT10-LD	C71
YAEV25-RH	B33	YAEV8C-L14	B28	YAG27LTC38FX	C49	YAG31LTC34LD	C69	YAG4CL-2NT10E1-LD	C71
YAEV25-RS	B32	YAEV8C-L14 BOX	B28	YAG27LTC38LD	C69	YAG31LTC38FX	C50	YAG4CL-2NTC-LD	C71
YAEV26-H	B30	YAEV8C-L2	B4, B28	YAG27LTC516FX	C49	YAG31LTC38LD	C69	YAG4CL-2TC14-LD	C71
YAEV26-H1	B30	YAEV8C-L2 BOX	B28	YAG27LTC516LD	C69	YAG31LTC516FX	C50	YAG4CL-2TC14E1-LD	C71
YAEV26-H12	B30	YAEV8C-L3	B4, B28	YAG28L-2NT38-LD	C72	YAG31LTC516LD	C69	YAG4CL-2TC14E2-LD	C71
YAEV26-H2	B30	YAEV8C-L3 BOX	B28	YAG28L-2NTC-LD	C72	YAG31LTC58FX	C50	YAG4CL-2TC38-LD	C71
YAEV26-H3	B30	YAEV8C-L4	B28	YAG28L-2TC12-LD	C72	YAG31LTC58LD	C69	YAG4CL-2TC516-LD	C71
YAEV26-L	B4, B28	YAEV8C-L4 BOX	B28	YAG28L-2TC12E1-LD	C72	YAG32L-2NTC-LD	C73	YAG4CLNT10LD	C68
YAEV26-L1	B28	YAEV8C-RH	B33	YAG28L-2TC14-LD	C72	YAG32L-2TC38-LD	C73	YAG4CLTC10LD	C68
YAEV26-L2	B4, B28	YAEV8C-RH1	B33	YAG28L-2TC14E2-LD	C72	YAG32LTC12FX	C50	YAG4CLTC12FX	C49
YAEV26-L3	B4, B28	YAEV8C-RS	B32	YAG28L-2TC38-LD	C72	YAG32LTC12LD	C69	YAG4CLTC12LD	C68
YAEV26-RH	B33	YAEV8C-RS1	B32	YAG28L-2TC516-LD	C72	YAG32LTC38LD	C69	YAG4CLTC14FX	C49
YAEV26-RS	B32	YAFX15CLKIT	C16	YAG28LTC12FX	C49	YAG32LTC58FX	C50	YAG4CLTC14LD	C68
YAEV2C-H	B29	YAG18TC516LD	C68	YAG28LTC12LD	C69	YAG32LTC58LD	C69	YAG4CLTC38FX	C49
YAEV2C-H1	B29	YAG1CL-2NTC-LD	C72	YAG28LTC14LD	C69	YAG34L-2NT38-LD	C73	YAG4CLTC38LD	C68
YAEV2C-H2	B29	YAG1CL-2TC14-LD	C72	YAG28LTC14LD	C69	YAG34L-2NTC-LD	C73	YAG4CLTC516FX	C49
YAEV2C-H3	B29	YAG1CL-2TC14E1-LD	C72	YAG28LTC38FX	C49	YAG34L-2TC12-LD	C73	YAG4CLTC516LD	C68
YAEV2C-H4	B29	YAG1CL-2TC14E2-LD	C72	YAG28LTC38LD	C69	YAG34L-2TC38-LD	C73	YAG6CL-2NTC-LD	C71

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
YAG6CL-2TC10-LD	C71	YAV10-BOX	C17	YAV14-R	B31	YAV1C-L2TC14E1-FX	C57	YAV25M8	C75
YAG6CL-2TC10E-LD	C71	YAV10-H	B25	YAV14-RL33	B31	YAV1C-L2TC14E2-FX	C57	YAV26-L	B4, B24
YAG6CL-2TC10E2-LD	C71	YAV10-H BOX	B25	YAV14-T1	B22	YAV1C-L2TC38-FX	C57	YAV26-L BOX	B24
YAG6CL-2TC10E4-LD	C71	YAV10-H25	B25	YAV14-T1 BOX	B22	YAV1C-L2TC516-FX	C57	YAV26-L1	B4, B24
YAG6CL-2TC14-LD	C71	YAV10-H25 BOX	B25	YAV14-T2	B22	YAV1C-L3	B4, B24	YAV26-L1 BOX	B24
YAG6CL-2TC14E1-LD	C71	YAV10-H3	B25	YAV14-T2 BOX	B22	YAV1C-L3 BOX	B24	YAV26-L12	B24
YAG6CL-2TC14E2-LD	C71	YAV10-H3 BOX	B25	YAV14-T3	B22	YAV1C-L4	B4	YAV26-L12 BOX	B24
YAG6CL-2TC38-LD	C71	YAV10-HF	B36	YAV14-T3 BOX	B22	YAV1C-L6	B24	YAV26-L16	B4
YAG6CL-2TC516-LD	C71	YAV10-HF BOX	B36	YAV14-T32F	B35	YAV1C-RS1	B31	YAV26-L2	B4, B24
YAG6CLT516FX	C49	YAV10-L36	B22	YAV14-T32F BOX	B35	YAV1C-RS2	B31	YAV26-L2 BOX	B24
YAG6CLT10LD	C68	YAV10-L36 BOX	B22	YAV14-T34F	B35	YAV1C-TC10-FXB	C54	YAV26-L2NTC-FX	C57
YAG6CLT12FX	C49	YAV10-R	B31	YAV14-T34F BOX	B35	YAV1C-TC516-FXB	C54	YAV26-L2TC12E1-FX	C57
YAG6CLT12LD	C68	YAV10-R3 BOX	B31	YAV14-T5	B22	YAV1C2N-FXB	C63	YAV26-L2TC14-FX	C57
YAG6CLT14FX	C49	YAV10-T11	B22	YAV14-T5 BOX	B22	YAV1C2TC38-FXB	C63	YAV26-L2TC14E2-FX	C57
YAG6CLT14LD	C68	YAV10-T11 BOX	B22	YAV14-Z5	B36	YAV1CL-TC10-FX	C45	YAV26-L2TC38-FX	C57
YAG6CLT38FX	C49	YAV10-T2	B4, B22	YAV14-Z5 BOX	B36	YAV1CL-TC12-FX	C45	YAV26-L2TC516-FX	C57
YAG6CLT38LD	C68	YAV10-T2 BOX	B22	YAV14-Z6	B36	YAV1CL-TC14-FX	C45	YAV26-L3	B4, B24
YAG6CLT516LD	C68	YAV10-T21F BOX	B35	YAV14-Z6 BOX	B36	YAV1CL-TC38-FX	C45	YAV26-L3 BOX	B24
YAG8CL-2TC10-LD	C71	YAV10-T23F BOX	B35	YAV14T3	C75	YAV1CL-TC516-FX	C45	YAV26-RS	B31
YAG8CL-2TC14-LD	C71	YAV10-T3	B22	YAV150FM12	C78	YAV1CL2NT14FX	C59	YAV26-RS3	B31
YAG8CL-2TC14E1-LD	C71	YAV10-T3 BOX	B22	YAV150M10	C78	YAV1CL2NT516FX	C59	YAV26-TC12-FXB	C55
YAG8CL-2TC14E2-LD	C71	YAV10-T4	B4, B22	YAV150M12	C78	YAV240FM10	C78	YAV26-TC38-FXB	C55
YAG8CL-2TC38-LD	C71	YAV10-T4 BOX	B22	YAV150M14	C78	YAV240FM12	C78	YAV262N-FXB	C64
YAG8CLT10LD	C68	YAV10-T7	B4, B22	YAV150M16	C78	YAV240M10	C78	YAV262NTC38-FXB	C64
YAG8CLT12FX	C49	YAV10-T7 BOX	B22	YAV150M20	C78	YAV240M12	C78	YAV262TC14-FXB	C64
YAG8CLT12LD	C68	YAV10M10	C75	YAV16M10	C75	YAV240M14	C78	YAV262TC14E2-FXB	C64
YAG8CLT14FX	C49	YAV10M12	C75	YAV16M12	C75	YAV240M16	C78	YAV262TC38-FXB	C64
YAG8CLT14LD	C68	YAV10M6	C75	YAV16M6	C75	YAV240M20	C78	YAV26L-TC10-FX	C45
YAG8CLT38LD	C68	YAV10M8	C75	YAV16M8	C75	YAV25-L	B4, B24	YAV26L-TC12-FX	C45
YAG8CLT516FX	C49	YAV10R-BOX	C17	YAV18	B22, C75	YAV25-L BOX	B24	YAV26L-TC14-FX	C45
YAG8CLT516LD	C68	YAV10R3-BOX	C17	YAV18 BOX	B22	YAV25-L1	B4, B24	YAV26L-TC34-FX	C45
YAK-361A-2G1	H74	YAV10T2-BOX	C17	YAV18-H	B25	YAV25-L1 BOX	B24	YAV26L-TC38-FX	C45
YAK-361A-2G2	H74	YAV10T23F	B35	YAV18-H BOX	B25	YAV25-L16	B4	YAV26L-TC516-FX	C45
YAK25A-2G1	H74	YAV10T3-BOX	C17	YAV18-H19 BOX	B36	YAV25-L2	B4, B24	YAV26L-TC58-FX	C45
YAK25A-2G2	H74	YAV10T38	C75	YAV18-H19F	B36	YAV25-L2 BOX	B24	YAV26L2NT14FX	C59
YAK28A-2G1	H74	YAV10T4-BOX	C17	YAV18-H21F	B36	YAV25-L2NTC-FX	C57	YAV26L2NT38FX	C59
YAK28A-2G2	H74	YAV12-G2	B22	YAV18-H21F BOX	B36	YAV25-L2TC12E1-FX	C57	YAV26L2NT516FX	C59
YAK29A-2G1	H74	YAV12-G2 BOX	B22	YAV18-H6F	B36	YAV25-L2TC14-FX	C57	YAV26LNT12FX	C47
YAK2CA2G1	H74	YAV12-G3	B22	YAV18-H6F BOX	B36	YAV25-L2TC14E2-FX	C57	YAV26LNT38FX	C47
YAK2CA2G2	H74	YAV12-G3 BOX	B22	YAV18-L33	B22	YAV25-L2TC38-FX	C57	YAV26LNT516FX	C47
YAK311A-2G1	H74	YAV120FM10	C77	YAV18-L33 BOX	B22	YAV25-L2TC516-FX	C57	YAV27-L	B4, B24
YAK311A-2G2	H74	YAV120FM12	C77	YAV18-R	B31	YAV25-L2TC516E2-FX	C57	YAV27-L BOX	B24
YAK31A-2G1	H74	YAV120FM16	C77	YAV18-T1	B22	YAV25-L3	B4, B24	YAV27-L1	B4, B24
YAK31A-2G2	H74	YAV120M10	C77	YAV18-T1 BOX	B22	YAV25-L3 BOX	B24	YAV27-L1 BOX	B24
YAK34A-2G1	H74	YAV120M12	C77	YAV18-T19F	B35	YAV25-L4	B24	YAV27-L15	B24
YAK34A-2G2	H74	YAV120M14	C77	YAV18-T19F BOX	B35	YAV25-L4 BOX	B24	YAV27-L15 BOX	B24
YAK39A-2G1	H74	YAV120M16	C77	YAV18-T21F	B35	YAV25-RS	B31	YAV27-L18	B4
YAK39A-2G2	H74	YAV120M20	C77	YAV18-T21F BOX	B35	YAV25-RS3	B31	YAV27-L20	B4
YAK44A-2NG7	H74	YAV120M8	C77	YAV18-T4	B22	YAV25-TC10-FXB	C55	YAV27-L2TC-FX	C57
YAK44A-2NG8	H74	YAV14	B22	YAV18-T4 BOX	B22	YAV25-TC12-FXB	C55	YAV27-L2TC14-FX	C57
YASG6CL-2TC14E2-FX	C74	YAV14 BOX	B22	YAV18-T5	B22	YAV25-TC38-FXB	C55	YAV27-L2TC38-FX	C57
YASV6CL-2TC14E2-FX	C74	YAV14-H	B25	YAV18-T5 BOX	B22	YAV25-TC516-FXB	C55	YAV27-RS	B31
YASV6CL-2TC14E2-FX-60	C74	YAV14-H BOX	B25	YAV185FM10	C78	YAV252N-FXB	C64	YAV27-TC12-FXB	C55
YAV025M6	C75	YAV14-H1	B25	YAV185M10	C78	YAV252TC14-FXB	C64	YAV272N-FXB	C64
YAV04M6	C75	YAV14-H1 BOX	B25	YAV185M12	C78	YAV252TC14E2-FXB	C64	YAV272TC14E2-FXB	C64
YAV06FM6	C75	YAV14-H2	B25	YAV185M14	C78	YAV252TC38-FXB	C64	YAV272TC38-FXB	C64
YAV06M35	C75	YAV14-H2 BOX	B25	YAV185M16	C78	YAV25L-TC12-FX	C45	YAV27L-TC10-FX	C45
YAV06M4	C75	YAV14-H32F	B36	YAV185M20	C78	YAV25L-TC14-FX	C45	YAV27L-TC12-FX	C45
YAV06M5	C75	YAV14-H32F BOX	B36	YAV18T1	C75	YAV25L-TC38-FX	C45	YAV27L-TC14-FX	C45
YAV06M6	C75	YAV14-H34F	B36	YAV18T4	C75	YAV25L-TC516-FX	C45	YAV27L-TC38-FX	C45
YAV06M8	C75	YAV14-H34F BOX	B36	YAV18T5	C75	YAV25L2NT14E1FX	C59	YAV27L-TC516-FX	C45
YAV10	B4, B22	YAV14-H56F	B36	YAV1C-L	B24	YAV25L2NT14FX	C59	YAV28-L	B4, B24
YAV10 BOX	B22	YAV14-H56F BOX	B36	YAV1C-L BOX	B24	YAV25L2NT516FX	C59	YAV28-L BOX	B24
YAV10-21F	B35	YAV14-HF	B36	YAV1C-L1	B4, B24	YAV25LNT14FX	C47	YAV28-L12	B4, B24
YAV10-2TC10	C30	YAV14-HF BOX	B36	YAV1C-L1 BOX	B24	YAV25LNT38FX	C47	YAV28-L12 BOX	B24
YAV10-2TC14	C30	YAV14-L33	B22	YAV1C-L2	B4, B24	YAV25LNT516FX	C47	YAV28-L13	B4, B24
YAV10-2TC14E1	C30	YAV14-L33 BOX	B22	YAV1C-L2 BOX	B24	YAV25M10	C75	YAV28-L13 BOX	B24
YAV10-2TC14E2	C30	YAV14-L36	B22	YAV1C-L2NTC-FX	C57	YAV25M12	C75	YAV28-L14	B4, B24
YAV10-2TC38	C30	YAV14-L36 BOX	B22	YAV1C-L2TC14-FX	C57	YAV25M6	C75	YAV28-L14 BOX	B24

Alpha-Numeric Index

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
YAV28-L2NT38-FX	C57	YAV2C-RS2	B31	YAV4CL2NT14FX	C59	YAV8C-L2 BOX	B23	YAZ2CTC38	C28
YAV28-L2NTC-FX	C57	YAV2C-TC10-FXB	C54	YAV4CLNT10FX	C47	YAV8C-L3	B4, B23	YAZ30-2N	C41
YAV28-L2TC12-FX	C57	YAV2C-TC516-FXB	C54	YAV500M12	C79	YAV8C-L3 BOX	B23	YAZ30-2TC38	C41
YAV28-L2TC14-FX	C57	YAV2C2N-FXB	C63	YAV500M14	C79	YAV8C-L4	B4, B23	YAZ302TC38FX	C62
YAV28-L2TC14E2	C57	YAV2C2TC14-FXB	C63	YAV500M20	C79	YAV8C-L4 BOX	B23	YAZ30TC12	C29
YAV28-L2TC14E2-FX	C57	YAV2C2TC14E1-FXB	C63	YAV50FM12	C76	YAV8C-RS	B31	YAZ30TC38	C29
YAV28-L2TC38-FX	C57	YAV2C2TC14E2-FXB	C63	YAV50FM14	C76	YAV8C-RS1	B31	YAZ30TC38FX	C53
YAV28-L2TC516-FX	C57	YAV2C2TC38-FXB	C63	YAV50M10	C76	YAV8C-RS3	B31	YAZ31-2N	C41
YAV28-L54	B4	YAV2C2TC516-FXB	C63	YAV50M12	C76	YAV95FM12	C77	YAZ31-2TC14E2	C41
YAV28-L56	B4	YAV2CL-TC10-FX	C44	YAV50M14	C76	YAV95M10	C76	YAZ31-2TC38	C41
YAV28-L60	B4	YAV2CL-TC12-FX	C44	YAV50M16	C76	YAV95M12	C76	YAZ312TC14E2FX	C62
YAV28-LTC12E1-FX	C57	YAV2CL-TC14-FX	C44	YAV50M5	C76	YAV9C-L36	B22	YAZ312TC38FX	C62
YAV28-RS	B31	YAV2CL-TC38-FX	C44	YAV50M6	C76	YAV9C-L36 BOX	B22	YAZ31TC12	C29
YAV28-TC12-FXB	C55	YAV2CL-TC516-FX	C44	YAV50M8	C76	YAV9C-T4 BOX	B22	YAZ31TC38	C29
YAV28-TC38-FXB	C55	YAV2CL2NT10FX	C59	YAV5C-TC14-FXB	C54	YAV9C-T9	B22	YAZ31TC38FX	C53
YAV282N-FXB	C64	YAV2CL2NT14E1FX	C59	YAV5C2TC14-FXB	C63	YAV9C-T9 BOX	B22	YAZ32-2N	C41
YAV282NT38-FXB	C64	YAV2CL2NT14FX	C59	YAV630FM20	C79	YAZ1C-2N	C40	YAZ32-2TC38	C41
YAV282NTC38-FXB	C64	YAV2CLNT14FX	C47	YAV6C-L	B4, B23	YAZ1C-2TC14	C40	YAZ322TC38FX	C62
YAV282TC14E2-FXB	C64	YAV2CLNT516FX	C47	YAV6C-L BOX	B23	YAZ1C-2TC14E2	C40	YAZ32TC12	C29
YAV282TC38-FXB	C64	YAV300FM14	C78	YAV6C-L1	B4, B23	YAZ1C-2TC38	C40	YAZ32TC38	C29
YAV28L-TC12-FX	C45	YAV300M12	C78	YAV6C-L1 BOX	B23	YAZ1CTC12	C28	YAZ32TC38FX	C53
YAV28L-TC14-FX	C45	YAV300M14	C78	YAV6C-L10	B4, B23	YAZ1CTC14	C28	YAZ33-2N	C41
YAV28L-TC34-FX	C45	YAV300M16	C78	YAV6C-L10 BOX	B23	YAZ1CTC38	C28	YAZ33TC12	C29
YAV28L-TC38-FX	C45	YAV300M20	C78	YAV6C-L2	B4, B23	YAZ25-2N	C40	YAZ34-2N	C41
YAV28L-TC516-FX	C45	YAV35M10	C76	YAV6C-L2 BOX	B23	YAZ25-2NTC38	C40	YAZ34-2TC14E2	C41
YAV28L-TC58-FX	C45	YAV35M12	C76	YAV6C-L2NTC-FX	C56	YAZ25-2TC14	C40	YAZ34-2TC38	C41
YAV28L2ENT14FX	C59	YAV35M5	C76	YAV6C-L2TC10-FX	C56	YAZ25-2TC14E1	C40	YAZ342NT38FX	C62, C66
YAV28L2NT38FX	C59	YAV35M6	C76	YAV6C-L2TC10E2-FX	C56	YAZ25-2TC14E2	C40	YAZ342NTCFX	C62
YAV28LNT12FX	C47	YAV35M8	C76	YAV6C-L2TC10E4-FX	C56	YAZ25-2TC38	C40	YAZ342TC14E2FX	C62
YAV28LNT38FX	C47	YAV375M12	C79	YAV6C-L2TC10E9-FX	C56	YAZ25-2TC516	C40	YAZ342TC38FX	C62
YAV28LNT516FX	C47	YAV375M16	C79	YAV6C-L2TC14-FX	C56	YAZ25-2TC516E6	C40	YAZ34NT38FX	C53
YAV29-L2NT38-FX	C58	YAV375M20	C79	YAV6C-L2TC14E1-FX	C56	YAZ25TC12	C28	YAZ34TC12	C29
YAV29-L2NTC-FX	C58	YAV4C-L	B4, B23	YAV6C-L2TC14E2-FX	C56	YAZ25TC14	C28	YAZ34TC12FX	C53
YAV29-L2TC12-FX	C58	YAV4C-L BOX	B23	YAV6C-L2TC38-FX	C56	YAZ25TC38	C28	YAZ34TC38	C29
YAV29-L2TC14-FX	C58	YAV4C-L2	B4, B23	YAV6C-L2TC38E-FX	C56	YAZ25TC516	C28	YAZ34TC38FX	C53
YAV29-L2TC14E2-FX	C58	YAV4C-L2 BOX	B23	YAV6C-L4	B4, B23	YAZ26-2N	C41	YAZ35-2N	C41
YAV29-L2TC38-FX	C58	YAV4C-L2NT10-FX	C56	YAV6C-L4 BOX	B23	YAZ26-2TC14	C41	YAZ35TC12	C29
YAV29-L2TC516-FX	C58	YAV4C-L2NT10E1-FX	C56	YAV6C-RS	B31	YAZ26-2TC14E2	C41	YAZ36-2N	C41
YAV29-LTC12E1-FX	C58	YAV4C-L2NTC-FX	C56	YAV6C-RS1	B31	YAZ26-2TC38	C41	YAZ36-2TC38	C41
YAV292N-FXB	C64	YAV4C-L2TC14-FX	C56	YAV6C-RS2	B31	YAZ26TC12	C28	YAZ362TC38FX	C62
YAV292NT38-FXB	C64	YAV4C-L2TC14E1-FX	C56	YAV6C-RS4	B31	YAZ26TC14	C28	YAZ36TC12	C29
YAV292NTC38-FXB	C64	YAV4C-L2TC14E2-FX	C56	YAV6C-TC10-FXB	C54	YAZ26TC38	C28	YAZ36TC38	C29
YAV292TC14E2-FXB	C64	YAV4C-L2TC38-FX	C56	YAV6C-TC14-FXB	C54	YAZ27-2N	C41	YAZ36TC38FX	C53
YAV292TC38-FXB	C64	YAV4C-L2TC516-FX	C56	YAV6C2N-FXB	C63	YAZ27-2TC14E2	C41	YAZ37-2N	C41
YAV29L-TC12-FX	C45	YAV4C-L3	B4, B23	YAV6C2TC14-FXB	C63	YAZ27-2TC38	C41	YAZ37TC12	C29
YAV29L-TC14-FX	C45	YAV4C-L3 BOX	B23	YAV6C2TC14E2-FXB	C63	YAZ27TC12	C28	YAZ38-2N	C41
YAV29L-TC34-FX	C45	YAV4C-L4	B4, B23	YAV6C2TC38-FXB	C63	YAZ27TC38	C28	YAZ382ENT38FX	C66
YAV29L-TC38-FX	C45	YAV4C-L4 BOX	B23	YAV6C-TC10-FX	C44	YAZ28-2N	C41	YAZ382NNTFX	C62, C67
YAV29L-TC516-FX	C45	YAV4C-L5	B4, B23	YAV6CL-TC12-FX	C44	YAZ28-2NTC38	C41	YAZ382NT38FX	C62, C67
YAV29L-TC58-FX	C45	YAV4C-L5 BOX	B23	YAV6CL-TC14-FX	C44	YAZ28-2TC14E2	C41	YAZ382NTCFX	C62
YAV29L2NT38FX	C60	YAV4C-RS	B31	YAV6CL-TC34-FX	C44	YAZ28-2TC38	C41	YAZ382TC38FX	C62
YAV2C-L	B4, B23	YAV4C-RS2	B31	YAV6CL-TC38-FX	C44	YAZ28TC12	C28	YAZ38NT12FX	C53
YAV2C-L BOX	B23	YAV4C-RS3	B31	YAV6CL-TC516-FX	C44	YAZ28TC38	C28	YAZ38NT38FX	C53
YAV2C-L1	B4, B23	YAV4C-RS4	B31	YAV70FM10	C76	YAZ29-2N	C41	YAZ38TC12	C29
YAV2C-L1 BOX	B23	YAV4C-TC10-FXB	C54	YAV70FM12	C76	YAZ29-2TC38	C41	YAZ38TC12FX	C53
YAV2C-L11	B4	YAV4C-TC14-FXB	C54	YAV70M10	C76	YAZ29TC12	C28	YAZ38TC38FX	C53
YAV2C-L2	B4, B23	YAV4C-TC516-FXB	C54	YAV70M12	C76	YAZ29TC38	C28	YAZ39-2N	C42
YAV2C-L2 BOX	B23	YAV4C2N-FXB	C63	YAV70M14	C76	YAZ2C-2N	C40	YAZ39-2NNT	C42
YAV2C-L2NTC-FX	C57	YAV4C2TC14-FXB	C63	YAV70M16	C76	YAZ2C-2NTC38	C40	YAZ39-2NT38	C42
YAV2C-L2TC14-FX	C57	YAV4C2TC14E2-FXB	C63	YAV70M5	C76	YAZ2C-2TC10E2	C40	YAZ39-2TC38	C42
YAV2C-L2TC14E1-FX	C57	YAV4C2TC38-FXB	C63	YAV70M6	C76	YAZ2C-2TC14	C40	YAZ39NT12	C29
YAV2C-L2TC14E2-FX	C57	YAV4C2TC516-FXB	C63	YAV70M8	C76	YAZ2C-2TC14E1	C40	YAZ39TC12	C29
YAV2C-L2TC38-FX	C57	YAV4CL-TC10-FX	C44	YAV800M20	C79	YAZ2C-2TC14E2	C40	YAZ39TC38	C29
YAV2C-L2TC516-FX	C57	YAV4CL-TC12-FX	C44	YAV8C-L	B4, B23	YAZ2C-2TC38	C40	YAZ3C-2N	C40
YAV2C-L3	B4, B23	YAV4CL-TC14-FX	C44	YAV8C-L BOX	B23	YAZ2C-2TC38E2	C40	YAZ3C-2TC14	C40
YAV2C-L4	B4, B23	YAV4CL-TC38-FX	C44	YAV8C-L1	B4, B23	YAZ2C-2TC38E6	C40	YAZ3C-2TC14E2	C40
YAV2C-L4 BOX	B23	YAV4CL-TC516-FX	C44	YAV8C-L1 BOX	B23	YAZ2C-2TC516E2	C40	YAZ3C-2TC38	C40
YAV2C-RS	B31	YAV4CL2NT10E1FX	C59	YAV8C-L14	B4, B23	YAZ2CTC12	C28	YAZ3C-2TC38E2	C40
YAV2C-RS1	B31	YAV4CL2NT10FX	C59	YAV8C-L2	B4, B23	YAZ2CTC14	C28	YAZ3CTC12	C28

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
YAZ3CTC14	C28	YAZV1CTC516FX	C53	YBA39	C12	YC8C8	C101, H19	YCB27R	H35
YAZ3CTC38	C28	YAZV252NTCFX	C62	YBA39A	C13	YC8L12	C100, N13	YCB28R	H35
YAZ40-2N	C42	YAZV252TC14E2FX	C62	YBA44A	C13	YCA25-2N	H70	YCB28U26	H36
YAZ402NTCFX	C62	YAZV252TC14FX	C62	YBA44FX	C12	YCA25R-2N	H72	YCB2R	H35
YAZ40TC12	C29	YAZV252TC38FX	C62	YBA44FX58	C12	YCA25RL-2N	H71	YCB321R	H35
YAZ41-2N	C42	YAZV252TC12FX	C53	YBAFX15CLKIT	C16	YCA26-2N	H70	YCB33R	H35
YAZ41TC12	C29	YAZV252TC14FX	C53	YBAV25FX14	C11	YCA26R-2N	H72	YCB33R26U	H36
YAZ44-2N	C42	YAZV252TC38FX	C53	YBAV26FX14	C11	YCA26RL-2N	H71	YCB35R	H35
YAZ44-2TC38	C42	YAZV262NTCFX	C62	YBAV27FX14	C11	YCA27-2N	H70	YCB361R	H35
YAZ442NT38FX	C62, C67	YAZV262TC14E2FX	C62	YBAV28FX	C11	YCA27R-2N	H72	YCB38R26U	H36
YAZ44TC12	C29	YAZV262TC14FX	C62	YBM1C-L	B26	YCA27RL-2N	H71	YCB4U1	H36
YAZ44TC38	C29	YAZV262TC38FX	C62	YBM1C-L3	B26	YCA28-2N	H70	YCD453R	H47
YAZ45-2N	C42	YAZV262TC12FX	C53	YBM25-L	B26	YCA28R-2N	H72	YCHC29TC2	C102
YAZ453-2N	C42	YAZV262TC14FX	C53	YBM25-L1	B26	YCA28RL-2N	H71	YCHC29TC29	C102
YAZ453TC12	C29	YAZV262TC38FX	C53	YBM25-L2	B26	YCA29-2N	H70	YCHC2TC2	C102
YAZ45TC12	C29	YAZV272TC14E2FX	C62	YBM26-L	B26	YCA2R-2N	H72	YCHC34TC2	C102
YAZ46-2N	C42	YAZV272TC38FX	C62	YBM28-1/4	B26	YCA2RL-2N	H71	YCHC34TC29	C102
YAZ46TC12	C29	YAZV272TC38FX	C53	YBM2C-L	B26	YCA30-2N	H70	YCHC34TC34	C102
YAZ47-2N	C42	YAZV282NT38FX	C62, C66	YBM2C-L1	B26	YCA30R-2N	H72	YCHC39TC2	C102
YAZ47TC12	C29	YAZV282NTCFX	C62	YBM2C-L2	B26	YCA31-2N	H70	YCHC39TC31	C102
YAZ48-2N	C42	YAZV282TC14E2FX	C62	YBM4C-L	B26	YCA32-2N	H70	YCHC39TC39	C102
YAZ48TC12	C29	YAZV282TC38FX	C62	YBM4C-L1	B26	YCA32R-2N	H72	YCHC44TC44	C102
YAZ4C-2N	C40	YAZV28NT38FX	C53	YBM4C-L2	B26	YCA321RL-2N	H71	YCHC8TC8	C102
YAZ4C-2TC10-E2	C40	YAZV28TC12FX	C53	YBM4C-L4	B26	YCA33R-2N	H72	YCR25RG6	H50
YAZ4C-2TC14	C40	YAZV28TC38FX	C53	YBM6C-L	B26	YCA34-2N	H70	YCR2625	H49
YAZ4C-2TC14E2	C40	YAZV292NT516FX	C62, C66	YBM6C-L2	B26	YCA35R-2N	H72	YCR26RG2	H50
YAZ4C-2TC38	C40	YAZV29NT516FX	C53	YBM6C-L3	B26	YCA361R-2N	H72	YCR26RG3	H50
YAZ4CTC12	C27	YAZV29NT14E2FX	C66	YBM6C-L9	B26	YCA37R-2N	H72	YCR2725	H49
YAZ4CTC14	C27	YAZV2C2NTCFX	C61	YBM8C	B26	YCA39-2N	H70	YCR27RG5	H50
YAZ4CTC38	C27	YAZV2C2TC14E2FX	C61	YBM8C-T2	B26	YCA391A-2N	H73	YCR27RG6	H50
YAZ5C-2N	C39	YAZV2C2TC14FX	C61	YBM8CT4	B26	YCA39R-2N	H72	YCR2825	H49
YAZ5CTC12	C27	YAZV2C2TC38FX	C61	YC10C10	C101, H19	YCA43R-2N	H73	YCR28RG5	H50
YAZ6C-2N	C39	YAZV2CTC12FX	C52	YC10L12	C100, N13	YCA441A-4N	H73	YCR28RG6	H50
YAZ6C-2TC10E2	C39	YAZV2CTC14FX	C52	YC1L12	C100	YCA44A2NG2	H73	YCR28RG7	H50
YAZ6C-2TC14	C39	YAZV2CTC38FX	C52	YC1U1	H23	YCA451A-4N	H73	YCR28RG8	H50
YAZ6C-2TC14E1	C39	YAZV4C2NT14E2FX	C66	YC25A2	H20	YCA45R-2N	H73	YCR291RG2	H50
YAZ6C-2TC14E2	C39	YAZV4C2TC14E2FX	C61	YC25A25	H20	YCA48R-4N	H73	YCR291RG3	H50
YAZ6C-2TC38	C39	YAZV4C2TC14FX	C61	YC25A4	H20	YCA4R-2N	H72	YCR291RG4	H50
YAZ6C-2TC38E2	C39	YAZV4C2TC38E2-FX	C61	YC25L12	C100	YCA4RL-2N	H71	YCR291RG5	H50
YAZ6C-2TC38E6	C39	YAZV4C2TC38FX	C61	YC26A25	H20	YCAB28-4N	H70	YCR30RG4	H50
YAZ6CTC12	C27	YAZV4CTC14FX	C52	YC26A26	H20	YCA32-4N	H70	YCR30RG6	H50
YAZ6CTC14	C27	YAZV4CTC38FX	C52	YC26C2	C101, H19	YCA34-4N	H70	YCR30RG7	H50
YAZ6CTC38	C27	YAZV6C2TC10E2FX	C61	YC26C26	C101, H19	YCA39-4N	H70	YCR32RG1	H50
YAZ8C-2TC10	C39	YAZV6C2TC14E1FX	C61	YC26L12	C100	YCA44-4N	H70	YCR32RG2	H50
YAZ8C-2TC10E2	C39	YAZV6C2TC14E2FX	C61	YC27L12	C100	YCAK25R-4N	H72	YCR32RG3	H50
YAZ8C-2TC14	C39	YAZV6C2TC14FX	C61	YC28A2	H20	YCAK28A-2G1	H75	YCR32RG4	H50
YAZ8C-2TC14E1	C39	YAZV6C2TC38E2FX	C61	YC28A25	H20	YCAK28R-4N	H72	YCR32RG5	H50
YAZ8C-2TC14E2	C39	YAZV6C2TC38E6FX	C61	YC28A26	H20	YCAK29A-2G1	H75	YCR32RG6	H50
YAZ8C-2TC38	C39	YAZV6C2TC38FX	C61	YC28A28	H20	YCAK30R-4N	H72	YCR32RG7	H50
YAZ8C2TC10E2FX	C61	YAZV6CTC14FX	C52	YC28C2	C101, H19	YCAK31A-2G1	H75	YCS25	H51
YAZ8C2TC10FX	C61	YAZV6CTC38FX	C52	YC28C26	C101, H19	YCAK31AG1	H75	YCS25R	H46-H47
YAZ8C2TC14E1FX	C61	YBA15ALKIT	C16	YC28C28	C101, H19	YCAK321R-4N	H72	YCS25RL	H48
YAZ8C2TC14E2FX	C61	YBA25A	C13	YC28U26	H23	YCAK33R-4N	H72	YCS26	H51
YAZ8C2TC14FX	C61	YBA26A	C13	YC2A2	H20	YCAK34A-2G3	H75	YCS26A	H49
YAZ8C2TC38FX	C61	YBA27A	C13	YC2A4	H20	YCAK35R-4N	H72	YCS26R	H47
YAZ8CTC10	C27, C52	YBA28A	C13	YC2C2	C101, H19	YCAK361A-4N	H72	YCS26RL	H48
YAZ8CTC14	C27, C52	YBA29	C11	YC2C4	C101, H19	YCAK361R-4N	H72	YCS27	H51
YAZ8CTC38	C27, C52	YBA29A	C13	YC2L12	C100	YCAK36A-2G1	H75	YCS27R	H47
YAZV10-2TC14	C39	YBA30A	C13	YC33R26	H20	YCAK37R-4N	H72	YCS28	H51
YAZV10-2TC14E2	C39	YBA31A	C13	YC33R26U	H23	YCAK391A-4N	H73	YCS28A	H49
YAZV10TC14	C27	YBA31FX	C11	YC3L12	C100	YCAK39A-2G2	H75	YCS28R	H47
YAZV1C2TC14E1FX	C61	YBA32A	C13	YC4A4	H20	YCAK39R-4N	H72	YCS28RL	H48
YAZV1C2TC14E2FX	C61	YBA32FX	C11	YC4A6	H20	YCAK43R-4N	H73	YCS29	H51
YAZV1C2TC14FX	C61	YBA34A	C13	YC4C4	C101, H19	YCAK44A-2G2	H75	YCS2R	H47
YAZV1C2TC38FX	C61	YBA34FX	C11	YC4C6	C101, H19	YCAK453R-4N	H73	YCS30	H51
YAZV1C2TC516E6FX	C61	YBA36A	C13	YC4C8	C101, H19	YCAK45R-4N	H73	YCS301A	H49
YAZV1C2TC516FX	C61	YBA36FX	C12	YC4L12	C100, N13	YCB1U1	H36	YCS30R	H47
YAZV1CTC14FX	C52	YBA36FX58	C12	YC4U1	H23	YCB25R	H35	YCS31	H51
YAZV1CTC38FX	C53	YBA38FX	C12	YC6L12	C100, N13	YCB26R	H35	YCS311A	H49

Alpha-Numeric Index

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
YCS32	H51	YDS26R	H56	YDS361AT	H53	YE26-LH89	H40	YEV27P37X75FX	C111
YCS321R	H47	YDS26RL	H59	YDS361R	H56, H61	YE26R-60	H40	YEV27P41X82FX	C110
YCS321RL	H48	YDS26RLY	H58	YDS361RL	H60	YE27R-60	H40	YEV28P37X75FX	C112
YCS331A	H49	YDS26RP1	H56, H61	YDS361RP1	H56, H61	YE28-LH128	H40	YEV28P41X75FX	C111
YCS33R	H47	YDS26RP2	H56	YDS36LT	H60	YE28R-60	H40	YEV28P46X92FX	C110
YCS34	H51	YDS27	H54	YDS36R	H56	YE29P31X109	C112	YEV2CP20X75FX	C112
YCS341RL	H48	YDS271R	H57	YDS36RP2	H56-H57	YE29P41X82	C112	YEV2CP23X75FX	C111
YCS351A	H49	YDS271RP1	H57	YDS375H	H61	YE29P46X92	C111	YEV2CP26X75FX	C110
YCS35R	H47	YDS27AT	H53, H60	YDS37RP1	H56	YE29P50X100	C110	YEV4CP16X75FX	C112
YCS361A	H49	YDS27R	H56	YDS39	H54	YE2C-LH128	H40	YEV4CP20X75FX	C110
YCS361R	H47	YDS27RE	H61	YDS391AT	H53	YE2C-LH129	H40	YF/03/0TOOL	N8
YCS37R	H47	YDS27RL	H59	YDS392R	H57	YE2R-25	H40	YF0112I	B8
YCS39	H51	YDS27RLY	H58	YDS39RP1	H57	YE2WAG5	H40	YF0116I	B8
YCS391A	H49	YDS27RP1	H56, H61	YDS3C-3	H54	YE30P46X92	C112	YF0120I	B8
YCS39R	H47	YDS27RP2	H56-H57, H61	YDS3K10	H62	YE30P46X92FX	C111	YF0122I	B8
YCS43R	H47	YDS28	H54	YDS3K5	H62	YE30P50X100	C111	YF0122UI	B6
YCS44	H51	YDS28AT	H53, H60	YDS3K6	H62-H63	YE30P50X100FX	C110	YF0125I	B8
YCS45R	H47	YDS28F	H63	YDS3K7	H62	YE30P55X110	C110	YF0125UI	B6
YCS4R	H47	YDS28R	H56	YDS3K8	H62	YE30R-60	H40	YF0130I	B8
YCT2626	H29	YDS28RE	H61	YDS3W	H55	YE31-LH96	H40	YF0132UI	B6
YCT2828	H29	YDS28RL	H59	YDS41RP2	H56-H57	YE31P41X82FX	C112	YF0215UI	B6
YCU25A	H51	YDS28RLY	H58	YDS431AT	H53	YE31P50X100	C112	YF0216I	B8
YCU25R	H52	YDS28RP1	H56, H61	YDS43R43RS	H57	YE31P51X102FX	C110	YF0218I	B8
YCU26R	H52	YDS28RP2	H56	YDS43R45RS	H57	YE31P55X110	C111	YF0220UI	B6
YCU27R	H52	YDS29	H54	YDS43RP1	H57	YE31P59X118	C110	YF0222I	B8
YCU28A	H51	YDS291AT	H53	YDS43RP2	H57	YE32P51X102FX	C111	YF0225I	B8
YCU28R	H52	YDS291RP1	H56	YDS44	H54	YE32P55X110	C112	YF0225UI	B6
YCU291A	H51	YDS29AT	H53	YDS44RP2	H56-H57	YE32P55X110FX	C110	YF0232UI	B6
YCU2CA	H51	YDS2C	H51, H54	YDS451R34RS	H57	YE32P59X118	C111	YF0401TOOL	N8
YCU2R	H52	YDS2C-3	H54	YDS451R49RS	H57	YE32P63X126	C110	YF0412I	B8
YCU301A	H51	YDS2CA	H53, H60	YDS451RP1	H57	YE32R-60	H40	YF0412UI	B6
YCU30R	H52	YDS2F	H63	YDS45R45RS	H57	YE34-LH119	H40	YF0415I	B8
YCU321R	H52	YDS2KT	H63	YDS45RP1	H57	YE34-LH120	H40	YF0415UI	B6
YCU4R	H52	YDS2RE	H61	YDS45RP2	H57	YE34P51X102FX	C112	YF0416I	B8
YCU4RG1	H52	YDS2REP2	H61	YDS49RP1	H57	YE34P55X110FX	C111	YF0418I	B8
YUCUT129ACSR	N58	YDS2RL	H59	YDS49RP2	H57	YE34P59X118	C112	YF0418UI	B8
YD14-14	B14	YDS2RLY	H58	YDS4C	H51, H54	YE34P59X118FX	C110	YF0420UI	B6
YD28REP2	H61	YDS2W	H51, H55	YDS4CA	H46, H53	YE34P63X126	C111	YF0422I	B8
YDS011R	H57	YDS2WA	H53	YDS4KT	H63	YE34P71X142	C110	YF0425I	B8
YDS011RP1	H57	YDS30	H54	YDS4RL	H59	YE361R-60	H40	YF0425UI	B6
YDS021R	H56	YDS301AT	H53	YDS4RLY	H58	YE36P59X118FX	C111	YF0432UI	B6
YDS021RE	H61	YDS30LT	H60	YDS4W	H51, H55	YE36P63X126	C112	YF0612I	B8
YDS021REP1	H61	YDS30R	H56	YDS4WA	H46, H53	YE36P67X134FX	C110	YF0612UI	B5
YDS021RL	H59	YDS30RP1	H56	YDS500H	H61	YE36P71X142	C111	YF0615UI	B5
YDS021RLY	H58	YDS30RP2	H56	YDS6C	H51, H54	YE36P78X156	C110	YF0618I	B8
YDS021RP1	H56	YDS31	H54	YDS6CA	H53	YE38P59X118FX	C112	YF0618UI	B5
YDS1C	H51, H54	YDS311AT	H53, H60	YDS6KT	H63	YE38P67X134FX	C111	YF0625UI	B5
YDS1C-3	H54	YDS312E	H61	YDS6W	H51, H55	YE38P71X142FX	C110	YF0801TOOL	N8
YDS1R	H56	YDS312H	H61	YDS6WA	H53	YE39P71X142	C112	YF0812I	B8
YDS1RP1	H56	YDS31AT	H53	YDS6WK	H62	YE39P78X156	C111	YF0812UI	B5
YDS1RP2	H56	YDS32	H54	YDS75	H55	YE39P87X174	C110	YF0815I	B8
YDS1W	H55	YDS321R	H56	YDS76	H55	YE39R-60	H40	YF0815UI	B5
YDS25	H54	YDS321RL	H59	YDS78	H55	YE40P67X134FX	C112	YF0818I	B8
YDS25OE	H61	YDS321RLY	H58	YDS7K5	H62	YE40P71X142FX	C111	YF0818UI	B5
YDS251R	H57	YDS321RP1	H56	YDS7K6	H62	YE40P78X156FX	C110	YF1006TOOL	N8
YDS251RP1	H57	YDS326R	H56	YDS7K7	H62	YE44P78X156FX	C111	YF1010I	B8
YDS25AT	H46, H53, H60	YDS32LT	H60	YDS7M10T	H63, I45	YE44P87X174FX	C110	YF1010UI	B5
YDS25F	H63	YDS32R	H56	YDS7M6T	H63, I45	YE4R-25	H40	YF1012I	B8
YDS25R	H56	YDS32RP2	H56	YDS7M7T	H63, I45	YE6R-25	H40	YF1012UI	B5
YDS25REP2	H61	YDS331AT	H53, H60	YDS7M8T	H63, I45	YEV1CP23X75FX	C112	YF1015UI	B5
YDS25RL	H59	YDS33R	H56	YDS7M9T	H63, I45	YEV1CP26X75FX	C111	YF1018I	B8
YDS25RLY	H58	YDS33RP1	H56	YDS8KT	H63	YEV1CP29X75FX	C110	YF1018UI	B5
YDS25RP1	H56, H61	YDS34	H54	YDS8W	H51, H55	YEV25P26X75FX	C112	YF1209I	B8
YDS25RP2	H56	YDS341RL	H60	YDS8WG1	H55	YEV25P29X75FX	C111	YF1209UI	B5
YDS26	H54	YDS34R	H56	YDS8WK	H62	YEV25P33X75FX	C110	YF1210I	B8
YDS261R	H57	YDS34RP2	H56-H57	YE1WAG1	H40	YEV26P29X75FX	C112	YF1212I	B8
YDS261RP1	H57	YDS351AT	H53	YE25-LH97	H40	YEV26P33X75FX	C111	YF1212UI	B5
YDS26AT	H53	YDS35R	H56	YE25R-25	H40	YEV26P37X75FX	C110	YF1215UI	B5
YDS26F	H63	YDS35RP1	H56	YE26-LH88	H40	YEV27P33X75FX	C112	YF1218I	B8

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
YF1218UI	B5	YF2610TOOL	N8	YFD-365	C124	YFS32CPL	K44	YGA6C-TC14	E17
YF1407UI	B5	YF2806I	B7	YFM28CP	K52	YFS32CR	K43	YGA6C-TC516	E17
YF1408I	B7	YF2807UI	B5	YFM28CPL	K52	YFS34CP	K43	YGA8C-2N	E17
YF1408UI	B5	YF2808I	B7	YFM28CR	K52	YFS34CPL	K44	YGA8C-TC10	E17
YF1410I	B7	YF3/025ID	B8	YFM29CP	K52	YFS34CR	K43	YGA8C-TC14	E17
YF1410UI	B5	YF3/025UI	B6	YFM29CPL	K52	YFS39CP	K43	YGA8C-TC516	E17
YF1412I	B7	YF3/030ID	B8	YFM29CR	K52	YFS39CPL	K44	YGC6C6	E12
YF1412UI	B5	YF3/030UI	B6	YFM30CP	K52	YFS39CR	K43	YGC6C8	E12
YF1418I	B7	YF3/032UI	B6	YFM30CPL	K52	YFS30CP	K43	YGC8C8	E12
YF1418UI	B5	YF3206TOOL	N8	YFM30CR	K52	YFS30CR	K43	YGF29-2N	E19
YF1425I	B7	YF35032UI	B6	YFM31CP	K52	YFSC6429	K46	YGF29-4N	E19
YF1606I	B7	YF35040UI	B6	YFM31CPL	K52	YFSC7232	K46	YGF34-2N	E19
YF1607UI	B5	YF4/0250TOOL	N8	YFM31CR	K52	YFSC8634	K46	YGF34-4N	E19
YF1608I	B7	YF4/027ID	B8	YFM32CP	K52	YFSC9639	K46	YGHA25-2N	E16
YF1608UI	B5	YF4/030ID	B8	YFM32CPL	K52	YFSH2829	K46	YGHA26-2N	E16
YF1610I	B7	YF4/032ID	B8	YFM32CR	K52	YFSH2829P	K46	YGHA27-2N	E16
YF1610UI	B5	YF4/032UI	B6	YFM34CP	K52	YFSH3032	K46	YGHA28-2N	E16
YF1612I	B7	YF4/034ID	B8	YFM34CPL	K52	YFSH3032P	K46	YGHA29-2N	E16
YF1612UI	B5	YF4/034UI	B6	YFM34CR	K52	YFSH34	K46	YGHA2C-2N	E16
YF1615I	B7	YF4/040UI	B6	YFM39CP	K52	YFSH34P	K46	YGHA31-2N	E16
YF1618I	B7	YFA28CP-2	K47	YFM39CPL	K52	YFSH39	K46	YGHA34-2N	E16
YF1618UI	B5	YFA28CPL-2	K48	YFM39CR	K52	YFSH39P	K46	YGHC26C2	E11
YF1806I	B7	YFA28CR-2	K47	YFMC6429	K54	YFSP28	K45	YGHC26C26	E11
YF1806UI	B5	YFA29CP-2	K47	YFMC7232	K54	YFSP28L	K45	YGHC29C26	E11
YF1808I	B7	YFA29CPL-2	K48	YFMC8634	K54	YFSP29	K45	YGHC29C29	E11
YF1808UI	B5	YFA29CR-2	K47	YFMC9639	K54	YFSP29L	K45	YGHC2C2	E11
YF1810I	B7	YFA30CP-2	K47	YFMH2829	K54	YFSP30	K45	YGHC34C26	E11
YF1810UI	B5	YFA30CPL-2	K48	YFMH2829P	K54	YFSP30L	K45	YGHC34C29	E11
YF1812I	B7	YFA30CR-2	K47	YFMH3032	K54	YFSP31	K45	YGHC34C34	E11
YF1812UI	B5	YFA31CP-2	K47	YFMH3032P	K54	YFSP31L	K45	YGHP29C2	E9
YF1818I	B7	YFA31CPL-2	K48	YFMH34	K54	YFSP32	K45	YGHP29C26	E9
YF2/020ID	B8	YFA31CR-2	K47	YFMH34P	K54	YFSP32L	K45	YGHP29C29	E9
YF2/025ID	B8	YFA32CP-2	K47	YFMH39	K54	YFSP34	K45	YGHP29C6W6W	E9
YF2/025UI	B6	YFA32CPL-2	K48	YFMH39P	K54	YFSP34L	K45	YGHP2C2	E9
YF2/027ID	B8	YFA32CR-2	K47	YFMP28	K53	YFSP39	K45	YGHP2C6W6W	E9
YF2/032UI	B6	YFA34CP-2	K47	YFMP28L	K53	YFSP39L	K45	YGHP34C2	E9
YF2006I	B7	YFA34CPL-2	K48	YFMP29	K53	YFSR28	K45	YGHP34C26	E9
YF2006UI	B5	YFA34CR-2	K47	YFMP29L	K53	YFSR29	K45	YGHP34C29	E9
YF2008I	B7	YFA39CP-2	K47	YFMP30	K53	YFSR30	K45	YGHP34C34	E9
YF2010I	B7	YFA39CPL-2	K48	YFMP30L	K53	YFSR31	K45	YGHP58C2W-2	E10
YF2010UI	B5	YFA39CR-2	K47	YFMP31	K53	YFSR32	K45	YGHP58C2W-2TN	E10
YF2012I	B7	YFAC6429	K51	YFMP31L	K53	YFSR34	K45	YGHR26C100	E14
YF2012UI	B5	YFAC7834	K51	YFMP32	K53	YFSR39	K45	YGHR26C12	E14
YF2018I	B7	YFAC8634	K51	YFMP32L	K53	YFTW0614	B9	YGHR26C34	E14
YF2205I	B7	YFAC9634	K51	YFMP34	K53	YFTW0814	B9	YGHR26C58	E14
YF2206I	B7	YFAH2829	K51	YFMP34PL	K53	YFTW1014	B9	YGHR29C100	E14
YF2206UI	B5	YFAH34	K51	YFMP39	K53	YFTW1212	B9	YGHR29C12	E14
YF2208I	B7	YFAH39	K51	YFMP39PL	K53	YFTW1410	B9	YGHR29C34	E14
YF2208UI	B5	YFAP28-2	K49	YFMR28	K53	YFTW1413	B9	YGHR29C58	E14
YF2210I	B7	YFAP28L-2	K50	YFMR29	K53	YFTW1608	B9	YGHR34C100	E14
YF2210TOOL	N8	YFAP29-2	K49	YFMR30	K53	YFTW1612	B9	YGHR34C34	E14
YF2210UI	B5	YFAP29L-2	K50	YFMR31	K53	YFTW1808	B9	YGHR34C58	E14
YF2212I	B7	YFAP30-2	K49	YFMR32	K53	YFTW1810	B9	YGHR58C2W-3	E15
YF2212UI	B5	YFAP30L-2	K50	YFMR34	K53	YFTW2008	B9	YGHS25	E16
YF2214TOOL	N8	YFAP31-2	K49	YFMR39	K53	YFTW2010	B9	YGHS26	E16
YF2405UI	B5	YFAP31L-2	K50	YFN-540	C124	YFTW2208	B9	YGHS27	E16
YF2406I	B7	YFAP32-2	K49	YFO-140	C124	YG14B2TC2C2C	E24	YGHS28	E16
YF2407UI	B5	YFAP32L-2	K50	YFR-865	C124	YG14B2TC2C6C	E24	YGHS29	E16
YF2408I	B7	YFAP34-2	K49	YFS28CP	K43	YG14BTC28	E24	YGHS2C	E16
YF25025ID	B8	YFAP34L-2	K50	YFS28CPL	K44	YGA25-2N	E17	YGHS31	E16
YF25027ID	B8	YFAP39-2	K49	YFS28CR	K43	YGA26-2N	E17	YGHS34	E16
YF25032ID	B8	YFAP39L-2	K50	YFS29CP	K43	YGA28-2N	E17	YGIBS28-338-2N	E21
YF25032UI	B6	YFAR28-2	K49	YFS29CPL	K44	YGA29-2N	E17	YGIBS28-400-2N	E21
YF25038ID	B8	YFAR29-2	K49	YFS29CR	K43	YGA2C-2N	E17	YGIBS28-462-2N	E21
YF25040UI	B6	YFAR30-2	K49	YFS30CPL	K44	YGA2C-2TC38	E17	YGIBS28-550-2N	E21
YF2605UI	B5	YFAR31-2	K49	YFS31CP	K43	YGA34-2N	E17	YGIBS28-613-2N	E21
YF2606I	B7	YFAR32-2	K49	YFS31CPL	K44	YGA6C-2N	E17	YGIBS28-675-2N	E21
YF2607UI	B5	YFAR34-2	K49	YFS31CR	K43	YGA6C-2TC38E2G1	E17	YGIBS34-338-2N	E21
YF2608I	B7	YFAR39-2	K49	YFS32CP	K43	YGA6C-TC10	E17	YGIBS34-400-2N	E21

Alpha-Numeric Index

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
YGIBS34-462-2N	E21	YH4444WC	C103, C105	YHSA18K14RK	B10	YNA34RT	110, 125	YNA7M10T	I44
YGIBS34-550-2N	E21	YH4444WCC	C103, C105	YHSA18K38	B10	YNA34RT15	110, 125	YNA7M6T	I44
YGIBS34-675-2N	E21	YH6C6C	C103-C105	YHSA18K38RK	B10	YNA34RT15H	15-16, 117	YNA7M7T	I44
YGBW28-338-2N	E21	YH6C6CWC	C103, C105	YHSA18K6	B10	YNA36R	9, 124	YNA7M8T	I44
YGBW28-400-2N	E21	YH6C6CWCC	C103, C105	YHSA18K6RK	B10	YNA36R15	9, 124	YNM4-28	K39
YGBW28-462-2N	E21	YH8C8C	C103-C105	YHSA18K8	B10	YNA36R15H	I3-I4, I16, I18-I19	YNM4-34	K39
YGBW28-550-2N	E21	YH8C8CWC	C103, C105	YHSA18K8RK	B10	YNA36RT	110, 125	YNM6-28	K39
YGBW28-613-2N	E21	YH8C8CWCC	C103, C105	YHSFQ10F25X03	B11	YNA36RT15	110, 125	YNM6-34	K39
YGBW28-675-2N	E21	YHD-10	H28	YHSFQ10F25X03RK	B11-B12	YNA36RT15H	15-16, 117	YNM8-28	K39
YGBW34-338-2N	E21	YHD-200	H26, H36	YHSFQ14F25X03	B11	YNA39R	9, 124	YNM8-34	K39
YGBW34-400-2N	E21	YHD-250	H26, H36	YHSFQ14F25X03RK	B11-B12	YNA39R15	9, 124	YNS32R	I11, I26
YGBW34-462-2N	E21	YHD-3	H28	YHSFQ18F25X03	B11	YNA39R15H	I3-I4, I16, I18-I19	YNS32RT	I12, I27
YGBW34-550-2N	E21	YHD-300	H26, H36	YHSFQ18F25X03RK	B11-B12	YNA39RT	110, 125	YNS34R	I11, I26
YGBW34-613-2N	E21	YHD-350	H26	YHSQ10F25X03	B11	YNA39RT15	110, 125	YNS34RT	I12, I27
YGBW34-675-2N	E21	YHD-4	H28	YHSQ10F25X03RK	B11	YNA39RT15H	15-16, 117	YNS36R	I11, I26
YGL29C2	E7	YHD-400	H26	YHSQ10M25X03	B11	YNA43R	9, 124	YNS36RT	I12, I27
YGL29C29	E7	YHD-5	H28	YHSQ10M25X03RK	B11	YNA43R15	9, 124	YNS39R	I11, I26
YGL2C2	E7	YHD-6	H28	YHSQ14F25X03	B11	YNA43R15H	I3-I4, I16, I18-I19	YNS39RT	I12, I27
YGL34C2	E7	YHD-7	H28	YHSQ14F25X03RK	B11	YNA43RT	110, 125	YNS43R	I11, I26
YGL34C29	E7	YHD200J1444	H37	YHSQ14M25X03	B11	YNA43RT15	110, 125	YNS43RT	I12, I27
YGL34C34	E7	YHD250J1444	H37	YHSQ14M25X03RK	B11	YNA43RT15H	15-16, 117	YNS451R	I11, I26
YGLR29C100	E8	YHD300J1496	H37	YHSQ18F25X03	B11	YNA451R	9, 124	YNS451RT	I12, I27
YGLR29C12	E8	YHD350	H36	YHSQ18F25X03RK	B11	YNA451R15	9, 124	YNS49R	I11, I26
YGLR29C34	E8	YHD350J1496	H37	YHSQ18M25X03	B11	YNA451R15H	I3-I4, I16, I18-I19	YNS49RT	I12, I27
YGLR29C58	E8	YHN-450	H27	YHSQ18M25X03RK	B11	YNA451RT	110, 125	YNS52R	I11, I26
YGLR34C100	E8	YHN-500	H27, H36	YHSS10	B11	YNA451RT15	110, 125	YNS52RT	I12, I27
YGLR34C12	E8	YHN-525	H27	YHSS10RK	B11-B12	YNA451RT15H	15-16, 117	YNS54R	I26
YGLR34C34	E8	YHN-550	H27	YHSS14	B11	YNA49R	9, 124	YNS54RT	I27
YGLR34C58	E8	YHN-600	H27	YHSS14RK	B11-B12	YNA49R15	9, 124	YNS56R	I11, I26
YGS25	E18	YHN500J1496	H37	YHSS18	B11	YNA49R15H	I3-I4, I16, I18-I19	YNS56RT	I12, I27
YGS26	E18	YHO-1	H28	YHSS18RK	B11-B12	YNA49RT	110, 125	YNS58R	I11, I26
YGS28	E18	YHO-10	H28	YKA25R-2N	H32	YNA49RT15	110, 125	YNS58RT	I12, I27
YGS29	E18	YHO-100	H26, H36	YKA26-2N	H34	YNA49RT15H	15-16, 117	YNS594R	I26
YGS2C	E18	YHO-125	H26	YKA26R-2N	H32	YNA52R	9, 124	YNS594RT	I27
YGS34	E18	YHO-150	H26, H36	YKA27R-2N	H32	YNA52R15	9, 124	YNS59R	I11, I26
YGS6C	E18	YHO-2	H28	YKA28-2N	H34	YNA52R15H	I3-I4, I16, I18-I19	YNS59RT	I12, I27
YGS8C	E18	YH0100J1444	H37	YKA28R-2N	H32	YNA52RT	110, 125	YNT32R32R	I13, I29
YGT275	E23	YH0150J1444	H37	YKA2C-2N	H34	YNA52RT15	110, 125	YNT32R32RHT	I41
YH2929	C103-C105	YHR-700	H27	YKA2R-2N	H32	YNA52RT15H	15-16, 117	YNT34R34R	I13, I29
YH2929WC	C103, C105	YHR-750	H27	YKA30-2N	H34	YNA54R	124	YNT34R34RHT	I41
YH2929WCC	C103, C105	YHR-800	H27	YKA30R-2N	H32	YNA54R15	124	YNT36R36R	I13, I29
YH292C	C103-C105	YHR-850	H27	YKA321R-2N	H32	YNA54R15H	116, I18-I19	YNT36R36RHT	I41
YH292CWC	C103, C105	YHR-900	H27	YKA33R-2N	H32	YNA54RT	125	YNT39R39R	I13, I29
YH292CWCC	C103, C105	YHR-950	H27	YKA34-2N	H34	YNA54RT15	125	YNT39R39RHT	I41
YH298C	C103-C105	YHSA10K10	B10	YKA34CA-2N	H32	YNA54RT15H	117	YNT43R43R	I13, I29
YH298CWC	C103, C105	YHSA10K10F	B10	YKA361R-2N	H32	YNA56R	9, 124	YNT43R43RHT	I41
YH298CWCC	C103, C105	YHSA10K10FRK	B10, B12	YKA37R-2N	H32	YNA56R15	9, 124	YNT451R451R	I13, I29
YH2C2C	C103-C105	YHSA10K10RK	B10, B12	YKA391A-2N	H32	YNA56R15H	I3-I4, I16, I18-I19	YNT451R451RHT	I41
YH2C2CWC	C103, C105	YHSA10K12	B10	YKA44-2N	H34	YNA56RT	110, 125	YNT49R49R	I13, I29
YH2C2CWCC	C103, C105	YHSA10K12RK	B10	YKA6C-2N	H34	YNA56RT15	110, 125	YNT49R49RHT	I41
YH3429	C103-C105	YHSA10K14	B10	YM10-28	K38	YNA56RT15H	15-16, 117	YNT52R52R	I13, I29
YH3429WC	C103, C105	YHSA10K14RK	B10	YM10-34	K38	YNA58R	9, 124	YNT52R52RHT	I41
YH3429WCC	C103, C105	YHSA10K38	B10	YM12-28	K38	YNA58R15	9, 124	YNT54R54R	I29
YH3434	C103-C105	YHSA10K38RK	B10	YM12-34	K38	YNA58R15H	I3-I4, I16, I18-I19	YNT56R56R	I13, I29
YH3434WC	C103, C105	YHSA14K10	B10	YM4-28	K38	YNA58RT	110, 125	YNT56R56RHT	I41
YH3434WCC	C103, C105	YHSA14K10F	B10	YM4-34	K38	YNA58RT15	110, 125	YNT58R58R	I13, I29
YH3931	C103-C105	YHSA14K10FRK	B10, B12	YM6-28	K38	YNA58RT15H	15-16, 117	YNT58R58RHT	I41
YH3931WC	C103, C105	YHSA14K10RK	B10, B12	YM6-34	K38	YNA594R	124	YNT594R594R	I29
YH3931WCC	C103, C105	YHSA14K14	B10	YM8-28	K38	YNA594R15	124	YNT59R59R	I13, I29
YH3939	C103-C105	YHSA14K14RK	B10	YM8-34	K38	YNA594R15H	116, I18-I19	YNT59R59RHT	I41
YH3939WC	C103, C105	YHSA14K38	B10	YNA32R	9, 124	YNA594RT	125	YNTA245MRTACCC	I51
YH3939WCC	C103, C105	YHSA14K38RK	B10	YNA32R15	9, 124	YNA594RT15	125	YNTA32R	I14, I28
YH4429	C103-C105	YHSA14K8	B10	YNA32R15H	I3-I4, I16, I18-I19	YNA594RT15H	117	YNTA32RHT	I42
YH4429WC	C103, C105	YHSA14K8RK	B10	YNA32RT	110, 125	YNA59R	9, 124	YNTA32RTACCC	I51
YH4429WCC	C103, C105	YHSA18K10	B10	YNA32RT15	110, 125	YNA59R15	9, 124	YNTA34R	I14, I28
YH4434	C103-C105	YHSA18K10F	B10	YNA32RT15H	15-16	YNA59R15H	I3-I4, I16, I18-I19	YNTA34RHT	I42
YH4434WC	C103, C105	YHSA18K10FRK	B10, B12	YNA34R	9, 124	YNA59RT	110, 125	YNTA36R	I14, I28
YH4434WCC	C103, C105	YHSA18K10RK	B10, B12	YNA34R15	9, 124	YNA59RT15	110, 125	YNTA36RHT	I42
YH4444	C103-C105	YHSA18K14	B10	YNA34R15H	I3-I4, I16, I18-I19	YNA59RT15H	15-16, 117	YNTA36RTACCC	I51

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
YNTA39R	114, 128	YP25U25	H21	YRB34U31	C123	YS2C-LB	C85-C86	YS4CA1	C120
YNTA39RHT	142	YP26AU2	H21, H36	YRB34U31TW	K72	YS2C-T	C87	YS4CFXLTCKITC	C89
YNTA39RTACCC	151	YP27AU2	H21	YRB34U34TW	K72	YS2CA1	C120	YS5C	C83
YNTA43R	114, 128	YP27AU26	H21, H36	YRB36U31	C123	YS2CAT	C122	YS5C-L BOX	C82
YNTA43RHT	142	YP27AU4	H21, H36	YRB36U34	C123	YS2CFXLTCKITC	C89	YS5C-LB	C85-C86
YNTA43RTACCC	151	YP28C28	H19	YRB39U31TW	K72	YS2CLTCKITC	C89	YS6C	C83
YNTA451R	114, 128	YP28U2	H21	YRB39U34	C123	YS2UCGI	K70	YS6C-L BOX	C82
YNTA451RHT	142	YP28U26	H21, H36	YRB39U34TW	K72	YS30	C83	YS6C-T	C87
YNTA451RTACCC	151	YP29C26	H19	YRB39U36	C123	YS30-FXB	C88	YS6CA1	C120
YNTA49R	114, 128	YP2C2	H19	YRB39U39TW	K72	YS30-L	C82	YS6CFXLTCKITC	C89
YNTA49RHT	142	YP2U3	H21, H36	YRB44U31TW	K72	YS30-LB	C85-C86	YS8C	C83
YNTA49RTACCC	151	YPC26R8U	H23	YRB44U34TW	K72	YS30-T	C87	YS8C-FXB	C88
YNTA52RTACCC	151	YPC28R28A	H22	YRB44U39TW	K72	YS30A1	C121	YS8C-L-BOX	C82
YNTA54R	114, 128	YPC28U26	H22, H36	YRB44U44TW	K72	YS30AT	C122	YS8CA1	C120
YNTA54RHT	142	YPC28U28	H21-H22	YRV2CV6C-L	B57	YS31	C83	YS8CFXLTCKITC	C89
YNTA56R	114, 128	YPC28U4	H22, H36	YRV4CV6C-L	B57	YS31-FXB	C88	YSA25R-2N	H33
YNTA56RHT	142	YPC29C26	K76	YRV6CV10-L	B57	YS31-L	C82	YSA26R-2N	H33
YNTA58R	114, 128	YPC2A8U	H23	YRV6CV8C-L	B57	YS31-T	C87	YSA28R-2N	H33
YNTA58RHT	142	YPC33R26U	H22, H36	YRV8CV10-L	B57	YS31A1	C121	YSA2R-2N	H33
YNTA594R	128	YPC33R28R	H22	YRV8CV14-L	B57	YS31ACGI	K70	YSA30R-2N	H33
YNTA59R	114, 128	YPC33R33R	H22	YS-T	C87	YS31AT	C122	YSA321R-2N	H33
YNTA59RHT	142	YPC36A32	H22	YS10WAG1	C120	YS31LTCKITC	C89	YSA37R-2N	H33
YNU245MRACCC	152	YPC36A36	H22	YS12AG1	C120	YS32	C83	YSCM104	B52
YNU32R	115, 130	YPC38R26U	H22	YS1C	C83	YS32-FXB	C88	YSCM133	B52
YNU32RACCC	152	YPC40A32	H22	YS1C-L BOX	C82	YS32-L	C82	YSCM167	B52
YNU32RHT	143	YPC40A36	H22	YS1C-LB	C85-C86	YS32A1	C121	YSCM17	B52
YNU34R	115, 130	YPC40A40	H22	YS1C-T	C87	YS34	C83	YSCM212	B52
YNU34RHT	143	YQE-91	B58	YS1CA1	C120	YS34-FXB	C88	YSCM231	B52
YNU36R	115, 130	YR2C2WT	C83	YS25	C83	YS34-L	C82	YSCM27	B52
YNU36RACCC	152	YRA1CU-1	H75	YS25-L BOX	C82	YS34-T	C87	YSCM42	B52
YNU36RHT	143	YRA25A-1	H75	YS25-LB	C85-C86	YS34A1	C121	YSCM66	B52
YNU39R	115, 130	YRA25U	H75	YS25-T	C87	YS34AT	C122	YSCM80	B52
YNU39RACCC	152	YRA26U	H75	YS25A1	C120	YS34FXLTCKITC	C89	YSD25R25R	H45
YNU39RHT	143	YRA27U	H75	YS25AT	C122	YS34LTCKITC	C89	YSD26R25R	H45
YNU43R	115, 130	YRA28U	H75	YS25FXLTCKITC	C89	YS36	C83	YSD26R26R	H45
YNU43RACCC	152	YRA4CU-1	H75	YS25LTCKITC	C89	YS36-FXB	C88	YSD26R2R	H45
YNU43RHT	143	YRA6CU-1	H75	YS25UCGI	K70	YS36-L	C82	YSD26R2W	H45
YNU451R	115, 130	YRA8CU-1	H75	YS26	C83	YS36A1	C121	YSD27R25R	H45
YNU451RACCC	152	YRAL1CU	H75	YS26-L BOX	C82	YS38-FXB	C88	YSD27R26R	H45
YNU451RHT	143	YRAL4CU	H75	YS26-LB	C85-C86	YS38-L	C82	YSD27R27R	H45
YNU49R	115, 130	YRB1CU1TTN	K71	YS26-T	C87	YS38FXLTCK	C89	YSD27R2R	H45
YNU49RACCC	152	YRB1CU2TTN	K71	YS26A1	C121	YS39	C83	YSD27R2W	H45
YNU49RHT	143	YRB25U2	C123	YS26AT	C122	YS39-L	C82	YSD28R25R	H45
YNU52RACCC	152	YRB25U25TTN	K71	YS26FXLTCKITC	C89	YS39-T	C87	YSD28R26R	H45
YNU54R	115, 130	YRB25U2TTN	K71	YS26LTCKITC	C89	YS39A1	C121	YSD28R27R	H45
YNU54RHT	143	YRB25U3TTN	K71	YS26UCGI	K70	YS39AM1	C121	YSD28R28R	H45
YNU56R	115, 130	YRB27U25	C123	YS27	C83	YS39AT	C122	YSD28R2R	H45
YNU56RHT	143	YRB27U25TW	K71	YS27-L BOX	C82	YS39LTCKITC	C89	YSD28R2W	H45
YNU58R	115	YRB27U26	C123	YS27-LB	C85-C86	YS3C	C83	YSE10	B56
YNU58RHT	143	YRB2825T	K74-K75	YS27A1	C121	YS3C-L	C82	YSE10-BOX	B56
YNU594R	130	YRB28U1TW	K71	YS27AT	C122	YS3C-LB	C85-C86	YSE10HN	B55
YNU595R	130	YRB28U25TW	K71	YS27UCGI	K70	YS40-FXB	C88	YSE14H	B56
YNU59R	115, 130	YRB28U26	C123	YS28	C83	YS44	C83	YSE14H-BOX	B56
YNU59RHT	143	YRB28U26TW	K71	YS28-L BOX	C82	YS44-FXB	C88	YSE14HN	B55
YOT3434	H29	YRB28U28TW	K71	YS28-LB	C85-C86	YS44-L	C82	YSE18H	B56
YOU32R	H52	YRB28U3TW	K71	YS28-T	C87	YS44A1	C121	YSE18H-BOX	B56
YOU33R	H52	YRB29U28	C123	YS28A1	C121	YS44AT	C122	YSE18HN	B55
YOU35R	H52	YRB2U3TTN	K71	YS28AT	C122	YS44FXLTCKITC	C89	YSES10K	B53
YOU361R	H52	YRB2U4	C123	YS28LTCKITC	C89	YS45A1	C121	YSES14-2	B56
YOU37R	H52	YRB31U25TW	K71	YS28UCGI	K70	YS46	C83	YSES14K	B53
YOU39R	H52	YRB31U28	C123	YS29	C83	YS46A1	C121	YSES18-1	B56
YOU41R	H52	YRB31U28TW	K71	YS29-L BOX	C82	YS47A1	C121	YSES18K	B53
YOU421R	H52	YRB31U29	C123	YS29-LB	C85-C86	YS48	C83	YSH-2925-E	C107
YOU43R	H52	YRB31U31TW	K71	YS29-T	C87	YS483A1	C121	YSH-292C-E	C107
YOU44R	H52	YRB3428T	K74-K75	YS29A1	C121	YS48A1	C121	YSH2929	C107
YOU453R	H52	YRB34U25TW	K72	YS29AT	C122	YS4C	C83	YSH3429	C107
YOU45R	H52	YRB34U28TW	K72	YS29FXLTCKITC	C89	YS4C-L BOX	C82	YSH3434	C107
YOU48R	H52	YRB34U29TW	K72	YS2C	C83	YS4C-LB	C85-C86	YSH3931	C107
YOU49R	H52	YRB34U30TW	K72	YS2C-L BOX	C82	YS4C-T	C87	YSH3939	C107

Alpha-Numeric Index

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
YSHG3429	E13	YSR34FX26FXTCKITC	C91, C96	YSU2W4W	H44	YTS311AT	I21	YTS486A	I20
YSHG3434	E13	YSR34FX28FXTCKITC	C91, C96	YSU2W6W	H44	YTS312E	I46	YTS486AT	I21
YSHG3931	E13	YSR34FX28LTCKITC	C91, C96	YSU2W8W	H44	YTS32AR	I22	YTS48A	I20
YSHG4429	E13	YSR34FX29FXTCKITC	C91, C95	YSU4W4W	H44	YTS32ART	I23	YTS48AR	I22
YSM10	B51	YSR34FX2CFXLTCKITC	C91, C96	YSU4W6W	H44	YTS32R33RS	I7	YTS48ART	I23
YSM14	B51	YSR34FX31LTCKITC	C91, C95	YSU4W8W	H44	YTS32R34RS	I7	YTS48AT	I21
YSM18	B51	YSR34FX4CFXLTCKITC	C91, C96	YSU6W6W	H44	YTS32R34RSHT	I35	YTS48R481RS	I7
YSM1C	B51	YSR34FX6CFXLTCKITC	C91, C96	YSV10	B49	YTS32RT33RS	I8	YTS48R481RSHT	I35
YSM25	B51	YSR38FX26FXTCKITC	C90, C95	YSV10 BOX	B49	YTS32RT33RSHT	I36	YTS48R48RS	I7
YSM26	B51	YSR38FX28FXTCKITC	C90, C95	YSV10-H	B49	YTS32RT34RS	I8	YTS48R48RSHT	I35
YSM27	B51	YSR38FX28LTCKITC	C90, C95	YSV10-H BOX	B49	YTS32RT34RSHT	I36	YTS48RT481RS	I8
YSM28	B51	YSR38FX29FXTCKITC	C90, C95	YSV1014-G2	B57	YTS331A	I20	YTS48RT481RSHT	I36
YSM2C	B51	YSR38FX30LTCKITC	C90, C95	YSV1214-G1	B57	YTS331AT	I21	YTS48RT48RS	I8
YSM4C	B51	YSR38FX31LTCKITC	C90, C95	YSV14	B49	YTS34R34RS	I7	YTS48RT48RSHT	I36
YSM6C	B51	YSR38FX34FXTCKITC	C90, C95	YSV14 BOX	B49	YTS34R34RSHT	I35	YTS49AR	I22
YSM8C	B51	YSR38FX34LTCKITC	C90, C95	YSV14-H	B49	YTS34RT34RS	I8	YTS49ART	I23
YSP-T	C87	YSR3928FXTCKITC	C90, C94	YSV14-H BOX	B49	YTS34RT34RSHT	I36	YTS49R483RS	I7
YSP1C-T	C87	YSR3928LTCKITC	C90, C94	YSV1418	B57	YTS351A	I20	YTS49R483RSHT	I35
YSP25-T	C87	YSR3929FXTCKITC	C90, C94	YSV18	B49	YTS351AT	I21	YTS49R48RS	I7
YSP26-T	C87	YSR3930LTCKITC	C90, C94	YSV18 BOX	B49	YTS361A	I20	YTS49R48RSHT	I35
YSP28-T	C87	YSR3931LTCKITC	C90, C94	YSV18-H	B49	YTS361AT	I21	YTS49RT483RS	I8
YSP29-T	C87	YSR3934FXTCKITC	C90, C94	YSV18-H BOX	B49	YTS36R362RS	I7	YTS49RT483RSHT	I36
YSP2C-T	C87	YSR3934LTCKITC	C90, C94	YSV1C-FXB	C88	YTS36R362RSHT	I35	YTS49RT48RS	I8
YSP30-T	C87	YSR3938FXTCKITC	C90, C94	YSV1C-L	B50	YTS36R36RS	I7	YTS49RT48RSHT	I36
YSP31-T	C87	YSR3939LTCKITC	C90, C94	YSV1C-L BOX	B50	YTS36R36RSHT	I35	YTS500E	I46
YSP34-T	C87	YSR44FX28FXTCKITC	C90, C94	YSV25-FXB	C88	YTS36RT362RS	I8	YTS51AR	I22
YSP39-T	C87	YSR44FX28LTCKITC	C90, C94	YSV25-L	B50	YTS36RT362RSHT	I36	YTS51ART	I23
YSP4C-T	C87	YSR44FX29FXTCKITC	C90, C94	YSV25-L BOX	B50	YTS36RT36RS	I8	YTS52R48RS	I7
YSR10CFX12CLTCKITC	C93, C99	YSR44FX30LTCKITC	C90, C94	YSV26-FXB	C88	YTS36RT36RSHT	I36	YTS52R48RSHT	I35
YSR10CFX14CLTCKITC	C93, C99	YSR44FX31LTCKITC	C90, C94	YSV26-L	B50	YTS375E	H62, I46	YTS52R521RS	I7
YSR25FX2CFXLTCKITC	C92, C98	YSR44FX34FXTCKITC	C90, C94	YSV26-L BOX	B50	YTS391A	I20	YTS52R521RSHT	I35
YSR25FX4CFXLTCKITC	C92, C98	YSR44FX34LTCKITC	C90, C94	YSV27-FXB	C88	YTS391AT	I21	YTS52R59RS	I7
YSR25FX6CFXLTCKITC	C92, C98	YSR44FX38FXTCKITC	C90, C94	YSV27-L	B50	YTS39A	I20	YTS52R59RSHT	I35
YSR26FX25FXTCKITC	C92, C98	YSR44FX39LTCKITC	C90, C94	YSV27-L BOX	B50	YTS39AR	I22	YTS52RT48RS	I8
YSR26FX2CFXLTCKITC	C92, C98	YSR4CFX10CLTCKITC	C92, C99	YSV28-FXB	C88	YTS39ART	I23	YTS52RT48RSHT	I36
YSR26FX4CFXLTCKITC	C92, C98	YSR4CFX6CFXLTCKITC	C92, C99	YSV28-L	B50	YTS39AT	I21	YTS52RT521RS	I8
YSR26FX6CFXLTCKITC	C92, C98	YSR4CFX8CFXLTCKITC	C92, C99	YSV28-L BOX	B50	YTS39R43RS	I7	YTS52RT521RSHT	I36
YSR2825FXTCKITC	C92, C98	YSR6CFX10CLTCKITC	C93, C99	YSV2C-FXB	C88	YTS39R43RSHT	I35	YTS52RT59RS	I8
YSR282CFXLTCKITC	C92, C98	YSR6CFX8CFXLTCKITC	C93, C99	YSV2C-L	B50	YTS39RT43RS	I8	YTS52RT59RSHT	I36
YSR284CFXLTCKITC	C92, C98	YSR8CFX10CLTCKITC	C93, C99	YSV2C-L BOX	B50	YTS39RT43RSHT	I36	YTS54959RSHT	I35
YSR286CFXLTCKITC	C92, C98	YSR8CFX14CLTCKITC	C93, C99	YSV4C-FXB	C88	YTS431A	I20	YTS549R521RS	I7
YSR28FX25FXTCKITC	C92, C97	YSS2R	H46	YSV4C-L	B50	YTS431AT	I21	YTS549R521RSHT	I35
YSR28FX26FXTCKITC	C92, C97	YSS4R	H46	YSV4C-L BOX	B50	YTS43BE	H62, I46	YTS549R549RS	I7
YSR28FX28LTCKITC	C92, C97	YSS6R	H46	YSV6C-FXB	C88	YTS43R43RS	I7	YTS549R549RSHT	I35
YSR28FX2CFXLTCKITC	C92, C97	YSS6RG2	H46	YSV6C-L	B50	YTS43R43RSHT	I35	YTS549R59RS	I7
YSR28FX4CFXLTCKITC	C92, C98	YST2525	C108	YSV6C-L BOX	B50	YTS43RT43RS	I8	YTS549RT521RS	I8
YSR29FX25FXTCKITC	C91, C97	YST2626	C108	YSV8C-L	B49-B50	YTS43RT43RSHT	I36	YTS549RT521RSHT	I36
YSR29FX28LTCKITC	C91, C97	YST2825	C108	YSV8C-L BOX	B49-B50	YTS445A	I20	YTS549RT549RS	I8
YSR29FX2CFXLTCKITC	C91, C97	YST2828	C108	YSV9C-L	B49	YTS445AT	I21	YTS549RT549RSHT	I36
YSR2CFX4CFXLTCKITC	C92, C99	YST282C	C108	YSV9C-L BOX	B49	YTS451A	I20	YTS549RT59RS	I8
YSR2CFX6CFXLTCKITC	C92, C99	YST2929	C108	YTA25R-2N	H31	YTS451AR	I22	YTS549RT59RSHT	I36
YSR2CFX8CFXLTCKITC	C92, C99	YST2C2C	C108	YTA26-2N	H33	YTS451ART	I23	YTS55AR	I22
YSR3125FXTCKITC	C91, C97	YST3131	C108	YTA26R-2N	H31	YTS451AT	I21	YTS55ART	I23
YSR3126FXTCKITC	C91, C97	YST3428	C108	YTA27R-2N	H31	YTS451R449RS	I7	YTS56R59RS	I7
YSR3128FXTCKITC	C91, C96	YST3434	C108	YTA28-2N	H33	YTS451R449RSHT	I35	YTS56R59RSHT	I35
YSR3128LTCKITC	C91, C96	YST3939	C108	YTA28R-2N	H31	YTS451R48RS	I7	YTS56RT59RS	I8
YSR3129FXTCKITC	C91, C96	YST4C4C	C108	YTA2C-2N	H33	YTS451R48RSHT	I35	YTS56RT59RSHT	I36
YSR312CFXLTCKITC	C91, C97	YSU25A25A	H44	YTA2R-2N	H31	YTS451RT449RS	I8	YTS58R48RS	I7
YSR314CFXLTCKITC	C91, C97	YSU25R25R	H44	YTA321R-2N	H31	YTS451RT449RSHT	I36	YTS58R48RSHT	I35
YSR316CFXLTCKITC	C91, C97	YSU25R2R	H44	YTA33R-2N	H31	YTS451RT48RS	I8	YTS58RT48RS	I8
YSR32FX28FXTCKITC	C91, C96	YSU25R2W	H44	YTA34-2N	H33	YTS451RT48RSHT	I36	YTS58RT48RSHT	I36
YSR32FX29FXTCKITC	C91, C96	YSU25R4W	H44	YTA361R-2N	H31	YTS457A	I20	YTS592AR	I22
YSR3425FXTCKITC	C90, C95	YSU25R6W	H44	YTA37R-2N	H31	YTS457AT	I21	YTS592ART	I23
YSR3428FXTCKITC	C90, C95	YSU2R2R	H44	YTA391A-2N	H31	YTS463A	I20	YTS59AR	I22
YSR3428LTCKITC	C90, C95	YSU2R2W	H44	YTA39R-2N	H31	YTS463AT	I21	YTS59ART	I23
YSR3429FXTCKITC	C90, C95	YSU2R4W	H44	YTA43R-2N	H31	YTS47A	I20	YTS59R521RS	I7
YSR3431LTCKITC	C90, C95	YSU2R6W	H44	YTS301A	I20	YTS47AT	I21	YTS59R521RSHT	I35
YSR3434FXTCKITC	C90, C95	YSU2R8W	H44	YTS301AT	I21	YTS484A	I20	YTS59R59RS	I7
YSR34FX25FXTCKITC	C91, C96	YSU2W2W	H44	YTS311A	I20	YTS484AT	I21	YTS59R59RSHT	I35

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
YTS59RT521RS	18	YTW33REHT	I31-I34	YTW391ADT431AEK	I19	YTW451AT	I17	YTW484AD484AEK	I18
YTS59RT521RSHT	I36	YTW34R	I3	YTW391AT	I17	YTW451AT463AEK	I17	YTW484ADT	I19
YTS59RT59RS	18	YTW34R34REK	I3	YTW391AT431AEK	I17	YTW451R	I3	YTW484ADT484AEK	I19
YTS59RT59RSHT	I36	YTW34R34REKHT	I31	YTW39A	I16	YTW451R45REK	I3	YTW484AE	I16-I19
YTTAG388	E23	YTW34RD	I4	YTW39A39AEK	I16	YTW451R45REKHT	I31	YTW484AT	I17
YTU25R25R	H30	YTW34RD34REK	I4	YTW39AD	I18	YTW451R481REK	I3	YTW484AT484AEK	I17
YTU25R4W	H30	YTW34RD34REKHT	I32	YTW39AD39AEK	I18	YTW451R481REKHT	I31	YTW486A	I16
YTU26R26R	H30	YTW34RDHT	I32	YTW39ADT	I19	YTW451R48REK	I3	YTW486A486AE	I16
YTU27R27R	H30	YTW34RDT	I6	YTW39ADT39AEK	I19	YTW451R48REKHT	I31	YTW486AD	I18
YTU28R28R	H30	YTW34RDT34REK	I6	YTW39AE	I16-I19	YTW451RD	I4	YTW486AD486AE	I18
YTU30R30R	H30	YTW34RDT34REKHT	I34	YTW39AT	I17	YTW451RD45REK	I4	YTW486ADT	I19
YTU321R26R	H30	YTW34RDTH	I34	YTW39AT39AEK	I17	YTW451RD45REKHT	I32	YTW486ADT486AE	I19
YTU321R27R	H30	YTW34RE	I3-I6	YTW39R	I3	YTW451RD481REK	I4	YTW486AE	I16-I19
YTU321R28R	H30	YTW34REHT	I31-I34	YTW39R43REK	I3	YTW451RD481REKHT	I32	YTW486AT	I17
YTU321R2R	H30	YTW34RHT	I31	YTW39R43REKHT	I31	YTW451RD48REK	I4	YTW486AT486AEK	I17
YTU321R321R	H30	YTW34RT	I5	YTW39RD	I4	YTW451RD48REKHT	I32	YTW48A	I16
YTU33R26R	H30	YTW34RT34REK	I5	YTW39RD43REK	I4	YTW451RDHT	I32	YTW48A484AEK	I16
YTU33R28R	H30	YTW34RT34REKHT	I33	YTW39RD43REKHT	I32	YTW451RDT	I6	YTW48AD	I18
YTU33R33R	H30	YTW34RTH	I33	YTW39RDHT	I32	YTW451RDT45REK	I6	YTW48AD484AEK	I18
YTW301A	I16	YTW351A	I16	YTW39RDT	I6	YTW451RDT45REKHT	I34	YTW48ADT	I19
YTW301A331AEK	I16	YTW351A351AEK	I16	YTW39RDT43REK	I6	YTW451RDT481REK	I6	YTW48ADT484AEK	I19
YTW301AD	I18	YTW351AD	I18	YTW39RDT43REKHT	I34	YTW451RDT481REKHT	I34	YTW48AT	I17
YTW301AD331AEK	I18	YTW351AD351AEK	I18	YTW39RDTH	I34	YTW451RDT48REK	I6	YTW48AT484AEK	I17
YTW301ADT	I19	YTW351ADT	I19	YTW39RHT	I31	YTW451RDT48REKHT	I34	YTW48R	I13
YTW301ADT331AEK	I19	YTW351ADT351AEK	I19	YTW39RT	I5	YTW451RDTH	I34	YTW48R481REK	I3
YTW301AT	I17	YTW351AE	I16-I19	YTW39RT43REK	I5	YTW451RHT	I31	YTW48R481REKHT	I31
YTW301AT331AEK	I17	YTW351AT	I17	YTW39RT43REKHT	I33	YTW451RT	I5	YTW48R48REK	I3
YTW311A	I16	YTW351T351AEK	I17	YTW39RTH	I33	YTW451RT45REK	I5	YTW48R48REKHT	I31
YTW311A331AEK	I16	YTW361A	I16	YTW431A	I16	YTW451RT45REKHT	I33	YTW48RD	I4
YTW311AD	I18	YTW361A39AEK	I16	YTW431A431AEK	I16	YTW451RT481REK	I5	YTW48RD481REK	I4
YTW311AD331AEK	I18	YTW361AD	I18	YTW431AD	I18	YTW451RT481REKHT	I33	YTW48RD481REKHT	I32
YTW311ADT	I19	YTW361AD39AEK	I18	YTW431AD431AEK	I18	YTW451RT48REK	I5	YTW48RD48REK	I4
YTW311ADT331AEK	I19	YTW361ADT	I19	YTW431ADT	I19	YTW451RT48REKHT	I33	YTW48RD48REKHT	I32
YTW311AT	I17	YTW361ADT39AEK	I19	YTW431ADT431AEK	I19	YTW451RTHT	I33	YTW48RDHT	I32
YTW311AT331AEK	I17	YTW361AT	I17	YTW431AE	I16-I19	YTW457A	I16	YTW48RDT	I6
YTW32R	I3	YTW361AT39AEK	I17	YTW431AT	I17	YTW457A463AEK	I16	YTW48RDT481RE	I6
YTW32R33REK	I3	YTW362RE	I3-I6	YTW431AT431AEK	I17	YTW457AD	I18	YTW48RDT481REK	I6
YTW32R33REKHT	I31	YTW362REHT	I31-I34	YTW43R	I3	YTW457AD463AEK	I18	YTW48RDT481REKHT	I34
YTW32R34REK	I3	YTW36R	I3	YTW43R43REK	I3	YTW457ADT	I19	YTW48RDT48REK	I6
YTW32R34REKHT	I31	YTW36R362REK	I3	YTW43R43REKHT	I31	YTW457ADT463AEK	I19	YTW48RDT48REKHT	I34
YTW32RD	I4	YTW36R362REKHT	I31	YTW43RD	I4	YTW457AT	I17	YTW48RDTH	I34
YTW32RD33REK	I4	YTW36R36REK	I3	YTW43RD43REK	I4	YTW457AT463AEK	I17	YTW48RE	I3-I6
YTW32RD33REKHT	I32	YTW36R36REKHT	I31	YTW43RD43REKHT	I32	YTW45RE	I3-I6	YTW48REHT	I31-I34
YTW32RD34REK	I4	YTW36RD	I4	YTW43RDHT	I32	YTW45REHT	I31-I34	YTW48RHT	I31
YTW32RD34REKHT	I32	YTW36RD362REK	I4	YTW43RDT	I6	YTW463A	I16	YTW48RT	I5
YTW32RDHT	I32	YTW36RD362REKHT	I32	YTW43RDT43REK	I6	YTW463A463AEK	I16	YTW48RT481REK	I5
YTW32RDT	I6	YTW36RD36REK	I4	YTW43RDT43REKHT	I34	YTW463AD	I18	YTW48RT481REKHT	I33
YTW32RDT33REK	I6	YTW36RD36REKHT	I32	YTW43RDTH	I34	YTW463AD463AEK	I18	YTW48RT48REK	I5
YTW32RDT33REKHT	I34	YTW36RDHT	I32	YTW43RE	I3-I6	YTW463ADT	I19	YTW48RT48REKHT	I33
YTW32RDT34REK	I6	YTW36RDT	I6	YTW43REHT	I31-I34	YTW463ADT463AEK	I19	YTW48RTH	I33
YTW32RDT34REKHT	I34	YTW36RDT362REK	I6	YTW43RHT	I31	YTW463AE	I16-I19	YTW49R	I3
YTW32RDTH	I34	YTW36RDT362REKHT	I34	YTW43RT	I5	YTW463AT	I17	YTW49R483REK	I3
YTW32RHT	I31	YTW36RDT36REK	I6	YTW43RT43REK	I5	YTW463AT463AEK	I17	YTW49R483REKHT	I31
YTW32RT	I5	YTW36RDT36REKHT	I34	YTW43RT43REKHT	I33	YTW47A	I16	YTW49R50REK	I3
YTW32RT33REK	I5	YTW36RDTH	I34	YTW43RTH	I33	YTW47A47AEK	I16	YTW49R50REKHT	I31
YTW32RT33REKHT	I33	YTW36RE	I3-I6	YTW445A	I16	YTW47AD	I18	YTW49RD	I4
YTW32RT34REK	I5	YTW36REHT	I31-I34	YTW445A463AEK	I16	YTW47AD47AEK	I18	YTW49RD483REK	I4
YTW32RT34REKHT	I33	YTW36RHT	I31	YTW445AD	I18	YTW47ADT	I19	YTW49RD483REKHT	I32
YTW32RTH	I33	YTW36RT	I5	YTW445AD463AEK	I18	YTW47ADT47AEK	I19	YTW49RD50REK	I4
YTW331A	I16	YTW36RT362REK	I5	YTW445ADT	I19	YTW47AE	I16-I19	YTW49RD50REKHT	I32
YTW331A331AE	I16	YTW36RT362REKHT	I33	YTW445ADT463AEK	I19	YTW47AT	I17	YTW49RDHT	I32
YTW331AD	I18	YTW36RT36REK	I5	YTW445AT	I17	YTW47AT47AEK	I17	YTW49RDT	I6
YTW331AD331AE	I18	YTW36RT36REKHT	I33	YTW445AT463AEK	I17	YTW481RE	I3-I6	YTW49RDT483REK	I6
YTW331ADT	I19	YTW36RTH	I33	YTW451A	I16	YTW481REHT	I31-I34	YTW49RDT483REKHT	I34
YTW331ADT331AE	I19	YTW391A	I16	YTW451A463AEK	I16	YTW483RE	I3-I6	YTW49RDT50REK	I6
YTW331AE	I16-I19	YTW391A431AEK	I16	YTW451AD	I18	YTW483REHT	I31-I34	YTW49RDT50REKHT	I34
YTW331AT	I17	YTW391AD	I18	YTW451AD463AEK	I18	YTW484A	I16	YTW49RDTH	I34
YTW331AT331AE	I17	YTW391AD431AEK	I18	YTW451ADT	I19	YTW484A484AEK	I16	YTW49RHT	I31
YTW33RE	I3-I6	YTW391ADT	I19	YTW451ADT463AEK	I19	YTW484AD	I18	YTW49RT	I5

Alpha-Numeric Index

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
YTW49RT483REK	15	YTW549RT521REKHT	I33	YTW59RT59REK	15	Z2MLDN6-20	K29	ZM12-25B	K15
YTW49RT483REKHT	I33	YTW549RT549REK	15	YTW59RT59REKHT	I33	Z2MLDN6-30	K29	ZM12-30	K21
YTW49RT50REK	15	YTW549RT549REKHT	I33	YTW59RTHT	I33	Z2MLDN6-30B	K29	ZM12-30B	K21
YTW49RT50REKHT	I33	YTW549RT56REK	15	Z-11	K62	Z3030	K33, K57	ZM14-15	K9
YTW49RTHT	I33	YTW549RT56REKHT	I33	Z-15	K62	Z3032	K33	ZM14-25	K15
YTW50RE	I3-16	YTW549RTHT	I33	Z-22.5	K62	Z3034	K33	ZM14-25B	K15
YTW50REHT	I31-I34	YTW56R	I3	Z-25	K62	Z3036	K33	ZM14-30	K21
YTW521RE	I3-16	YTW56R590REK	I3	Z-30	K62	Z3040	K33	ZM14-30B	K21
YTW521REHT	I31-I34	YTW56R590REKHT	I31	Z-37.5	K62	Z30NR	K32-K34, K57	ZM16-15	K9
YTW52R	I3	YTW56RD	I4	Z-44	K62	Z3132	K33, K57	ZM16-25	K15
YTW52R50REK	I3	YTW56RD590REK	I4	Z-50	K62	Z3134	K33	ZM16-25B	K15
YTW52R50REKHT	I31	YTW56RD590REKHT	I32	Z-7.5	K62	Z3136	K33	ZM16-30	K21
YTW52R521REK	I3	YTW56RDHT	I32	Z104C4034	K36	Z3140	K33	ZM16-30B	K21
YTW52R521REKHT	I31	YTW56RDT	I6	Z104C4434	K36	Z3232	K33-K34, K57	ZM4-15	K9
YTW52R56REK	I3	YTW56RDT590REK	I6	Z144C4840	K36	Z3234	K33-K34	ZM4-25	K15
YTW52R56REKHT	I31	YTW56RDT590REKHT	I34	Z1C28	K34	Z3236	K33-K34	ZM4-25B	K15
YTW52RD	I4	YTW56RDTHT	I34	Z1C29	K33-K34	Z3240	K33-K34	ZM4-30	K21
YTW52RD50REK	I4	YTW56RE	I3-16	Z1C30	K33-K34	Z3244	K34	ZM4-30B	K21
YTW52RD50REKHT	I32	YTW56REHT	I31-I34	Z1C32	K33-K34	Z32NR	K32-K34, K57	ZM6-15	K9
YTW52RD521REK	I4	YTW56RHT	I31	Z1C34	K33	Z3334	K33-K34	ZM6-25	K15
YTW52RD521REKHT	I32	YTW56RT	I5	Z2528	K33-K34	Z3336	K33-K34	ZM6-25B	K15
YTW52RD56REK	I4	YTW56RT590REK	I5	Z2529	K33-K34	Z3340	K33-K34	ZM6-30	K21
YTW52RD56REKHT	I32	YTW56RT590REKHT	I33	Z2530	K33-K34	Z3344	K34	ZM6-30B	K21
YTW52RDHT	I32	YTW56RTHT	I33	Z2532	K33-K34	Z3434	K33-K34, K57	ZM8-15	K9
YTW52RDT	I6	YTW56R	I3	Z2534	K33-K34	Z3436	K33-K34	ZM8-25	K15
YTW52RDT50REK	I6	YTW56R58REK	I3	Z2536	K34	Z3440	K33-K34	ZM8-25B	K15
YTW52RDT50REKHT	I34	YTW56R58REKHT	I31	Z2628	K34	Z3444	K33-K34	ZM8-30	K21
YTW52RDT521REK	I6	YTW56RD	I4	Z2629	K33-K34	Z34NR	K32-K34, K57	ZM8-30B	K21
YTW52RDT521REKHT	I34	YTW56RD58REK	I4	Z2630	K33-K34	Z34NRB	K32-K33	ZMDN3-20	K30
YTW52RDT56REK	I6	YTW56RD58REKHT	I32	Z2632	K33-K34	Z34P	K31	ZMDN3-20B	K30
YTW52RDT56REKHT	I34	YTW56RDHT	I32	Z2634	K33-K34	Z3536	K33	ZMDN3-25	K30
YTW52RDTHHT	I34	YTW56RDT	I6	Z2636	K34	Z3540	K33	ZMDN4-20	K30
YTW52RHT	I31, I33	YTW56RDT58REK	I6	Z2640	K34	Z3544	K33	ZMDN4-20B	K30
YTW52RT	I5	YTW56RDT58REKHT	I34	Z2728	K33-K34	Z3636	K33-K34	ZMDN4-25	K30
YTW52RT50REK	I5	YTW56RDTHHT	I34	Z2729	K34	Z3640	K33-K34	ZMDN5-20	K30
YTW52RT50REKHT	I33	YTW56R	I3-16	Z2730	K33-K34	Z3644	K33-K34	ZMDN5-20B	K30
YTW52RT521REK	I5	YTW56REHT	I31-I34	Z2732	K33-K34	Z36NR	K32-K34	ZMDN5-25	K30
YTW52RT521REKHT	I33	YTW56RHT	I31	Z2734	K33-K34	Z3740	K33	ZMDN6-20	K30
YTW52RT56REK	I5	YTW56RT	I5	Z2736	K34	Z3744	K33	ZMDN6-20B	K30
YTW52RT56REKHT	I33	YTW56RT58REK	I5	Z2740	K34	Z3840	K33	ZMDN6-25	K30
YTW52RTHT	I33	YTW56RT58REKHT	I33	Z2828	K33, K57	Z3844	K33	ZME2-15	K11
YTW549R	I3	YTW56RTHT	I33	Z2829	K33-K34	Z3940	K33	ZME2-25	K17
YTW549R521REK	I3	YTW590RE	I3-16	Z2830	K33-K34	Z3944	K33	ZME2-25B	K17
YTW549R521REKHT	I31	YTW590REHT	I31-I34	Z2832	K33-K34	Z3C28	K34	ZME2-30	K23
YTW549R549REK	I3	YTW591RE	I3-16	Z2834	K33-K34	Z4040	K33	ZME2-30B	K23
YTW549R549REKHT	I31	YTW591REHT	I31-I34	Z2836	K34	Z4044	K33	ZME3-15	K11
YTW549R56REK	I3	YTW59R	I3	Z2840	K34	Z40NR	K32-K34	ZME3-25	K17
YTW549R56REKHT	I31	YTW59R591REK	I3	Z2844	K34	Z40NRA	K32-K33	ZME3-25B	K17
YTW549RD	I4	YTW59R591REKHT	I31	Z28NR	K32-K34, K57	Z40P	K31	ZME3-30	K23
YTW549RD521REK	I4	YTW59R59REK	I3	Z2929	K33-K34, K57	Z4144	K33	ZME3-30B	K23
YTW549RD521REKHT	I32	YTW59R59REKHT	I31	Z2930	K33-K34	Z4244	K33	ZME4-15	K11
YTW549RD549REK	I4	YTW59RD	I4	Z2932	K33-K34	Z4344	K33	ZME4-25	K17
YTW549RD549REKHT	I32	YTW59RD591REK	I4	Z2934	K33-K34	Z4444	K33	ZME4-25B	K17
YTW549RD56REK	I4	YTW59RD591REKHT	I32	Z2936	K33-K34	Z44NR	K32-K34	ZME4-30	K23
YTW549RD56REKHT	I32	YTW59RD59REK	I4	Z2940	K33-K34	Z4C28	K33	ZME4-30B	K23
YTW549RDHT	I32	YTW59RD59REKHT	I32	Z2944	K34	Z4C29	K33	ZME5-15	K11
YTW549RDT	I6	YTW59RDHT	I32	Z29NR	K32-K34, K57	Z4C30	K33	ZME5-25	K17
YTW549RDT521REK	I6	YTW59RDT	I6	Z29P	K31	Z6C28	K33	ZME5-25B	K17
YTW549RDT521REKHT	I34	YTW59RDT591REK	I6	Z2C28	K33-K34	Z6C29	K33	ZME5-30	K23
YTW549RDT549REK	I6	YTW59RDT591REKHT	I34	Z2C29	K33-K34	Z6C30	K33	ZME5-30B	K23
YTW549RDT549REKHT	I34	YTW59RDT59REK	I6	Z2C30	K33	Z72C3029	K36	ZME6-15	K11
YTW549RDT56REK	I6	YTW59RDT59REKHT	I34	Z2C32	K33	Z88C3429	K36	ZME6-25	K17
YTW549RDT56REKHT	I34	YTW59RDTHHT	I34	Z2C34	K33	ZM10-15	K9	ZME6-25B	K17
YTW549RDTHHT	I34	YTW59RE	I3-16	Z2MLDN-2-20	K29	ZM10-25	K15	ZME6-30	K23
YTW549RE	I3-16	YTW59REHT	I31-I34	Z2MLDN2-30	K29	ZM10-25B	K15	ZME6-30B	K23
YTW549REHT	I31-I34	YTW59RHT	I31	Z2MLDN2-30B	K29	ZM10-30	K21	ZME7-15	K11
YTW549RHT	I31	YTW59RT	I5	Z2MLDN4-20	K29	ZM10-30B	K21	ZME7-25	K17
YTW549RT	I5	YTW59RT591REK	I5	Z2MLDN4-30	K29	ZM12-15	K9	ZME7-25B	K17
YTW549RT521REK	I5	YTW59RT591REKHT	I33	Z2MLDN4-30B	K29	ZM12-25	K15	ZME7-30	K23

CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.	CATALOG NO.	PAGE NO.
ZME7-30B	K23	ZMK9-25A4	K20	ZML9-25B	K18	ZMT13-30	K22	ZMX14-15	K13
ZME8-15	K11	ZMK9-25B	K20	ZML9-25B12	K18	ZMT13-30B	K22	ZMX14-15A3	K13
ZME8-25	K17	ZMK9-25B12	K20	ZML9-30	K24	ZMT15-15	K10	ZMX14-15A4	K13
ZME8-25B	K17	ZMK9-30	K26	ZML9-30B	K24	ZMT15-15A3	K10	ZMX14-25	K19
ZME8-30	K23	ZMK9-30B	K26	ZMLDN1-15	K27	ZMT15-25	K16	ZMX14-25A4	K19
ZME8-30B	K23	ZML2-15	K12	ZMLDN1-20	K27	ZMT15-25A3	K16	ZMX14-25B	K19
ZMK10-15	K14	ZML2-15A3	K12	ZMLDN1-20B	K27	ZMT15-25B	K16	ZMX14-25B12	K19
ZMK10-15A3	K14	ZML2-25	K18	ZMLDN1-25	K28	ZMT15-25B12	K16	ZMX14-30	K25
ZMK10-15A4	K14	ZML2-25A3	K18	ZMLDN1-25B	K28	ZMT15-30	K22	ZMX14-30B	K25
ZMK10-30	K20	ZML2-25B	K18	ZMLDN1-30	K28	ZMT15-30B	K22	ZMX16-15	K13
ZMK10-25A4	K20	ZML2-25B12	K18	ZMLDN1-30B	K28	ZMT17-15	K10	ZMX16-15A3	K13
ZMK10-25B	K20	ZML2-30	K24	ZMLDN2-15	K27	ZMT17-15A3	K10	ZMX16-15A4	K13
ZMK10-25B12	K20	ZML2-30B	K24	ZMLDN2-20	K27	ZMT17-25	K16	ZMX16-25	K19
ZMK10-30	K26	ZML3-15	K12	ZMLDN2-20B	K27	ZMT17-25A3	K16	ZMX16-25A4	K19
ZMK10-30B	K26	ZML3-15A3	K12	ZMLDN2-25	K28	ZMT17-25B	K16	ZMX16-25B	K19
ZMK4-15	K14	ZML3-25	K18	ZMLDN2-25B	K28	ZMT17-25B12	K16	ZMX16-25B12	K19
ZMK4-15A3	K14	ZML3-258	K18	ZMLDN2-30	K28	ZMT17-30	K22	ZMX16-30	K25
ZMK4-15A4	K14	ZML3-25A3	K18	ZMLDN2-30B	K28	ZMT17-30B	K22	ZMX16-30B	K25
ZMK4-25	K20	ZML3-25B12	K18	ZMLDN3-15	K27	ZMT3-15	K10	ZMX18-15	K13
ZMK4-25A4	K20	ZML3-30	K24	ZMLDN3-20	K27	ZMT3-15A3	K10	ZMX18-15A3	K13
ZMK4-25B	K20	ZML3-30B	K24	ZMLDN3-20B	K27	ZMT3-25	K16	ZMX18-15A4	K13
ZMK4-25B12	K20	ZML4-15	K12	ZMLDN3-25	K28	ZMT3-258	K16	ZMX18-25	K19
ZMK4-30	K26	ZML4-15A3	K12	ZMLDN3-25B	K28	ZMT3-25A3	K16	ZMX18-25A4	K19
ZMK4-30B	K26	ZML4-25	K18	ZMLDN3-30	K28	ZMT3-25B12	K16	ZMX18-25B	K19
ZMK5-15	K14	ZML4-25A3	K18	ZMLDN3-30B	K28	ZMT3-30	K22	ZMX18-25B12	K19
ZMK5-15A3	K14	ZML4-25B	K18	ZMLDN4-15	K27	ZMT3-30B	K22	ZMX18-30	K25
ZMK5-15A4	K14	ZML4-25B12	K18	ZMLDN4-20	K27	ZMT5-15	K10	ZMX18-30B	K25
ZMK5-25	K20	ZML4-30	K24	ZMLDN4-20B	K27	ZMT5-15A3	K10	ZMX10-25	K19
ZMK5-25A4	K20	ZML4-308	K24	ZMLDN4-25	K28	ZMT5-25	K16	ZMX10-25A4	K19
ZMK5-25B	K20	ZML5-15	K12	ZMLDN4-25B	K28	ZMT5-25A3	K16	ZMX10-25B	K19
ZMK5-25B12	K20	ZML5-15A3	K12	ZMLDN4-30	K28	ZMT5-25B	K16	ZMX10-25B12	K19
ZMK5-30	K26	ZML5-25	K18	ZMLDN4-30B	K28	ZMT5-25B12	K16	ZMX10-30	K25
ZMK5-30B	K26	ZML5-25A3	K18	ZMLDN5-15	K27	ZMT5-30	K22	ZMX4-15	K13
ZMK6-15	K14	ZML5-25B	K18	ZMLDN5-20	K27	ZMT5-30B	K22	ZMX4-15A3	K13
ZMK6-15A3	K14	ZML5-25B12	K18	ZMLDN5-20B	K27	ZMT7-15	K10	ZMX4-15A4	K13
ZMK6-15A4	K14	ZML5-30	K24	ZMLDN5-25	K28	ZMT7-15A3	K10	ZMX4-25	K19
ZMK6-25	K20	ZML5-30B	K24	ZMLDN5-25B	K28	ZMT7-25	K16	ZMX4-25A4	K19
ZMK6-25A4	K20	ZML6-15	K12	ZMLDN5-30	K28	ZMT7-25A3	K16	ZMX4-25B	K19
ZMK6-25B	K20	ZML6-15A3	K12	ZMLDN5-30B	K28	ZMT7-25B	K16	ZMX4-25B12	K19
ZMK6-25B12	K20	ZML6-25	K18	ZMLDN6-15	K27	ZMT7-25B12	K16	ZMX4-30	K25
ZMK6-30	K26	ZML6-25A3	K18	ZMLDN6-20	K27	ZMT7-30	K22	ZMX4-30B	K25
ZMK6-30B	K26	ZML6-25B	K18	ZMLDN6-20B	K27	ZMT7-30B	K22	ZMX6-15	K13
ZMK7-15	K14	ZML6-25B12	K18	ZMLDN6-25	K28	ZMT9-15	K10	ZMX6-15A3	K13
ZMK7-15A3	K14	ZML6-30	K24	ZMLDN6-25B	K28	ZMT9-15A3	K10	ZMX6-15A4	K13
ZMK7-15A4	K14	ZML6-30B	K24	ZMLDN6-30	K28	ZMT9-25	K16	ZMX6-25	K19
ZMK7-25	K20	ZML7-15	K12	ZMLDN6-30B	K28	ZMT9-25A3	K16	ZMX6-25A4	K19
ZMK7-25A4	K20	ZML7-15A3	K12	ZML0-15A3	K12	ZMT9-25B	K16	ZMX6-25B	K19
ZMK7-25B	K20	ZML7-25	K18	ZMS29	K35	ZMT9-25B12	K16	ZMX6-25B12	K19
ZMK7-25B12	K20	ZML7-25A3	K18	ZMS34	K35	ZMT9-30	K22	ZMX6-30	K25
ZMK7-30	K26	ZML7-25B	K18	ZMS40	K35	ZMT9-30B	K22	ZMX6-30B	K25
ZMK7-30B	K26	ZML7-25B12	K18	ZMT11-15	K10	ZMTDN	K31	ZMX8-15	K13
ZMK8-15	K14	ZML7-30	K24	ZMT11-15A3	K10	ZMX10-15	K13	ZMX8-15A3	K13
ZMK8-15A3	K14	ZML7-30B	K24	ZMT11-25	K16	ZMX10-15A3	K13	ZMX8-15A4	K13
ZMK8-15A4	K14	ZML8-15	K12	ZMT11-25A3	K16	ZMX10-15A4	K13	ZMX8-25	K19
ZMK8-25	K20	ZML8-25	K18	ZMT11-25B	K16	ZMX10-30B	K25	ZMX8-25A4	K19
ZMK8-25A4	K20	ZML8-25A3	K18	ZMT11-25B12	K16	ZMX12-15	K13	ZMX8-25B	K19
ZMK8-25B	K20	ZML8-25B	K18	ZMT11-30	K22	ZMX12-15A3	K13	ZMX8-25B12	K19
ZMK8-25B12	K20	ZML8-25B12	K18	ZMT11-30B	K22	ZMX12-15A4	K13	ZMX8-30	K25
ZMK8-30	K26	ZML8-30	K24	ZMT13-15	K10	ZMX12-25	K19	ZMX8-30B	K25
ZMK8-30B	K26	ZML8-30B	K24	ZMT13-15A3	K10	ZMX12-25A4	K19		
ZMK9-15	K14	ZML9-15	K12	ZMT13-25	K16	ZMX12-25B	K19		
ZMK9-15A3	K14	ZML9-15A3	K12	ZMT13-25A3	K16	ZMX12-25B12	K19		
ZMK9-15A4	K14	ZML9-25	K18	ZMT13-25B	K16	ZMX12-30	K25		
ZMK9-25	K20	ZML9-25A3	K18	ZMT13-25B12	K16	ZMX12-30B	K25		

PRODUCT/TRADE NAME INDEX

PRODUCT/TRADE NAME	CATALOG SECTION	PRODUCT/TRADE NAME	CATALOG SECTION	PRODUCT/TRADE NAME	CATALOG SECTION
ALFLUID™	N	HYDRAULIC FLUID	N	REFERENCE DATA	O
AUTOMATIC CRIMP	N	HYDRAULIC HOSE	N	REMOTE HEADS	N
BARTAP™	A, G	HYFLUID™	N	REVOLVER	N
BATOOL™	N	HYGRID™	D	RISERTAP	A
BATTERY CHARGER	N	HYGROUND™	D	SCRULINK™	A
BATTERY CRIMPER	N	HYLINK™	C	SCRULUG™	A
BATTERY TOOLS	N	HYLUG™	C	SERVIT™	A, E
BOLTS	L	HYPLUG™	C	SERVIT™ POST	D
BOOSTERS	F, N	HYPRESS™	N	SILCON BRONZE	L
BRAID	D, G	HYRACK™	B	SPANTAP	E
BURNDY®		HYREDUCER™	E	SPEC-BLOK™	A
BURNDYWELD™	D	HYSEALPLUG™	C	SPLICE	
B-CRIMP	B	HYSEALUG™	E	SPLICE KITS	J
C COPPER CRIMPIT™	C, E	HYSPLICE™	C, E, J	SPLICE-BLOK	A
CABELOK™	E	HYSTACK™	C, E	SPLICIT	B
CABLE CLAMP		HYTAIL™	D	SPLIT BOLT	A, E
CABLE CUTTERS	N	HYTAP™	C, E	STAINLESS HARDWARE	L
CABLE TIES	M	HYTEE™	C, E	STEP-TAP™	J
CABLE TRAY CLAMP	D	HYTOOL™	N	STIRRUP	E
CALIPERS	M	I-BEAM CLAMP	D	STRIPPERS	N
CABLE STRIPPERS	N	INSULINK™	E	STUD MOLE™	I, J
CIRCUIT TESTER	M	INSULUG™	B	SUBSTATION	G, H
CLIPIT™	E	INTENSIFIERS	N	TAPIT™	E
COAXIAL	K	KA-LUG™	A	TERMINAL	
COMPRESSION CONNECTOR	B, C	KITS		TERMINAL BLOCKS	M, A
COUPLINGS	N	LIGHTNING	D	TEST LEADS	M
CRIMPERS	N	LINKIT™	E	TOOL BAGS	F, N
CRIMPIT™	E	L'IL CRIMP	N	TOOL CASES	N
CRIMPS		LOCK WASHERS	L	TOOL KITS	B, N, C
CUTTERS	M, N	LOKTAP™	E	TOOLS	N, M
DIE INDEX	O	LUG		TRITAP™	A
DIES	N	MOLE™	I, J	TRITAP™ SERVIT™	A
DURICOMP™	I	MOLIMITER™	I	TUBING	M, J
DURIUM™	L	MOUNTING BASES	M	UNIGROUND™	D
ELECTRO-RAIL™	A	NOTAPE™	I	UNIRAP™	M
E-LINE™ HYLUG™	C	NUTS	L	UNITAP™	A
FINGRIP™	B	NYLOCLIP™	M	UNISPLICE™	E
FINLINK™	B	OKLIP™	A	URD	J
FLAGLOK™	B	OXIDE INHIBITOR	M	U-BLOK™	A
FLEXI-TAP™	A	PATOOLS™	N	U-TAP™	A
FORKLOK	B	PATRIOT™	N	VARILINK™	A
GRIDLOK™	D	PENETROX™	M	VARITAP™	A
GROUNDEM	D	POLYTAP™	A	VERSILUG™	A
GROUNDING	D	POPPER	N	VERSITAP™	A
GROUNDIT™	D	POSI-PRESS	N	VINYLINK™	B
GUAGES	N	POWERLINK™	I	VINYLUG™	B
GUTTER TAP	A	POWERLUG™	F	VISI-SHRINK	M
H-CRIMPIT™	E, C	PRESSES	N	WASHERS	L
H COPPER CRIMPIT™	C	PRESSURE GAUGES	N	WEJIT™	E
HARDWARE	L	PUMPS	N	WEJTAP™	F
HEAT SHRINK	M, J	NETWORK UNDGRD	I	WIRE BRUSH	M
HOSES	N	QIKLINK™	A	WIRE CONNECTOR	
HOT LINE TOOLS	F, N	QIKLUG™	A	WIRE CUTTERS	N
HYBOOST™	N	QIKPWR™	C	WIRE MARKERS	M
HYBUTTIN™	B	QIKSLEEVE™	E	WIRE NUTS	M
HYCRAB™	I	QIKSTOCK™	B, C	WIRE STRIPPERS	N
HYCRIMP™	E, C	QIKSTOP™	B, C	Y-LOK™	B
HYDENT™	C	QIKTAP™	A		
HYDRAULIC COUPLING	N	RAISED FLOOR	D		
HYDRAULIC FITTINGS	N	REDUCERS	B, C, E		