




TYPE QSPL

EASY WRAP SPOOL TIE

For Use On: ACAR, ACSR,
AWAC, All Aluminum,
Compacted ACSR

Right Hand Lay

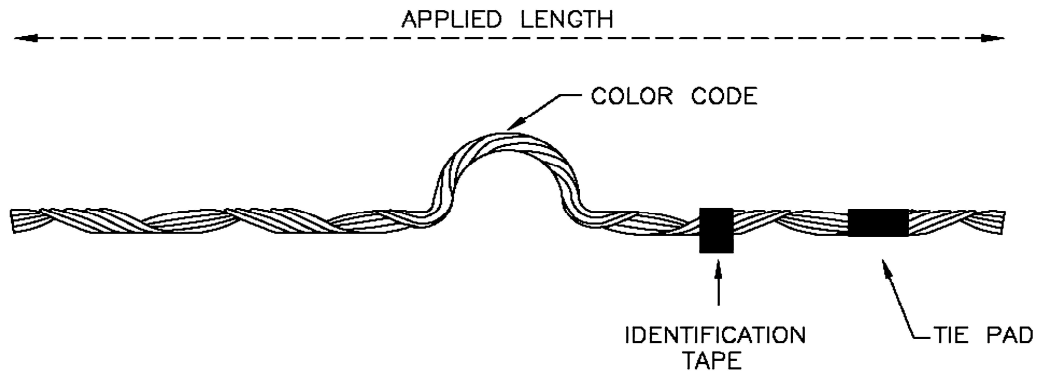

CATALOG NUMBER	Conductor Range		Nominal Conductor Size	Units/ctn	Length (mm)	Wt/carton (kg)	Color code
	(inches)	(mm)					
QSPL0277	0.245 - 0.277	6.223 - 7.036	#4, 6/1, 7/1 #4, 7W Alum. Alloy	100	508	5.90	Orange
QSPL0357	0.316 - 0.357	8.026 - 9.068	#2, 6/1, 7/1 #2 7W Alum. Alloy, #1 6/1	100	584	6.35	Red
QSPL0405	0.358 - 0.405	9.093 - 10.287	1/0 7W All Alum. 1/0, 6/1, 7W Alum. Alloy	100	508	7.71	Yellow
QSPL0459	0.406 - 0.459	10.312 - 11.659	2/0 7W All Alum. 2/0 6/1, 7W, Alum. Alloy	100	559	9.53	Blue
QSPL0520	0.460 - 0.520	11.684 - 13.208	3/0 7W All Alum. 3/0 6/1, 7W Alum Alloy	100	610	9.53	Orange
QSPL0588	0.521 - 0.588	13.233 - 14.935	4/0 7W All Alum. 4/0 6/1, 7W Alum. Alloy	100	635	12.25	Red
QSPL0665	0.589 - 0.665	14.961 - 16.891	266.8 MCM 37W All Alum. 266.8 18/1, 336.8 19W	100	711	12.70	Purple
QSPL0755	0.666 - 0.755	16.916 - 19.177	336.4 18/1 397.5 19W All Alum. 400 19W, 37W All Alum.	100	787	13.61	Brown
QSPL0858	0.756 - 0.858	19.202 - 21.793	477 19W, 37W All Alum. 477 18/1, 24/7	100	813	13.61	Red
QSPL0968	0.859 - 0.968	21.819 - 24.587	556.5 19W All Alum. 636, 18/1 700 MCM 37W, 61W All Alum.	100	838	18.15	Blue