




## TYPE SG

### SERVICE GRIP DEAD END

For Use On: ACSR, All  
Aluminum, Aluminum Alloy,  
Compacted ACSR, Compacted  
All Aluminum

Right Hand Lay

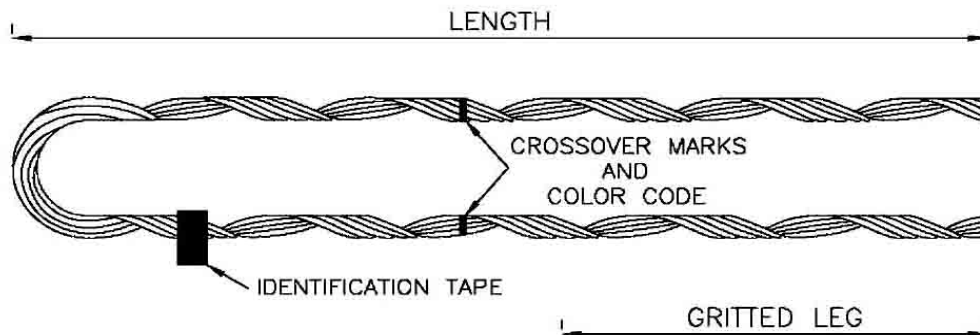

CATALOG NUMBER	Conductor Range		Nominal Conductor Size	Units/ctn	Length (mm)	Wt/carton (kg)	Color code
	(inches)	(mm)					
SG0198	0.169 - 0.198	4.293 - 5.029	#6, 6/1, All alum. & Alum. Alloy	300	279	10.89	Blue
SG0224	0.199 - 0.224	5.055 - 5.690	#5, 6/1, #4 sol., #5 7W Alum. Alloy	300	305	12.25	White
SG0257	0.225 - 0.257	5.715 - 6.528	#4, 6/1, 7/1, 7W All alum. & Alum. Alloy	300	330	13.16	Orange
SG0289	0.258 - 0.289	6.553 - 7.341	#3 6/1, 7W All Alum. #2 Solid., #3 7W Alum. Alloy	200	356	12.25	Black
SG0325	0.290 - 0.325	7.366 - 8.255	#2, 6/1, 7/1, 7W All alum. & Alum. Alloy	200	381	12.70	Red
SG0360	0.326 - 0.360	8.280 - 9.144	#1, 6/1, 7W All alum. & Alum. Alloy	200	432	14.07	Green
SG0400	0.361 - 0.400	9.169 - 10.160	1/0, 6/1, 7W All alum. & Alum. Alloy	100	483	12.70	Yellow
SG0450	0.401 - 0.450	10.185 - 11.430	2/0, 6/1, 7W All alum. & Alum. Alloy	100	533	14.07	Blue
SG0510	0.451 - 0.510	11.455 - 12.954	3/0, 6/1, 7W All alum. & Alum. Alloy	100	584	14.97	Orange
SG0580	0.511 - 0.580	12.979 - 14.732	4/0, 6/1, 18/1, 7W All alum. & Alum. Alloy	100	660	16.79	Red